

**argus**<sup>®</sup> **4**



The Argus<sup>®</sup>4 AA battery pack accessory allows use of disposable AA batteries to power the camera.

**ORDER CODE**

**Code**

ARGUS4\_AABP      AA Battery pack

TO BOOK A DEMONSTRATION OR FIND OUT MORE GO TO:

**argusdirect.com**

**MECHANICAL DATA**

|                                 |   |
|---------------------------------|---|
| <b>Overall dims (H x W x D)</b> | 62mm x 122mm x 68mm<br>(2.4 x 4.8 x 2.7 inches) (nominal) |
| <b>Weight</b>                   | 200g (7 ounces) without batteries                         |
| <b>Material</b>                 | Black Radel <sup>®</sup> -5100                            |

**ELECTRICAL DATA**

**Battery indicator**      The camera battery indicator has a very limited functionality with the AA battery pack



LR6 - 30 min  
FR6 - 8½ hours



LR6 - 3 hours  
FR6 - 1 hour

**Battery charger**



The battery charger will not charge any batteries in the AA battery pack. It remains in the 'Waiting' state.

|                           |  |
|---------------------------|--|
| <b>Battery life (LR6)</b> | 3½ hours at 22°C (72°F)<br>(P7150 with Panasonic LR6X 'Extreme') |
| <b>Battery life (FR6)</b> | 9½ hours at 22°C (72°F)<br>(P7150 with Energizer L91)            |

Behaviour shown with batteries specified, performance with batteries from other manufactures may vary.

**ENVIRONMENTAL DATA**

|                           |  |
|---------------------------|--|
| <b>Thermal conditions</b> | The AABP has been designed to operate continuously between: <ul style="list-style-type: none"> <li>• 10°C (14°F) and +80°C (176°F)</li> <li>• Higher temperatures can be tolerated for shorter times.</li> <li>• FR6 batteries are recommended for use below +5°C (40°F)</li> <li>• Use only LR6 batteries at high temperatures.</li> <li>• Do not use FR6 batteries &gt;60°C (140°F)</li> </ul> |
|---------------------------|--|

**Sealing**      IP42, will also withstand momentary immersion in water.

**Impact**      The camera and AABP will withstand a drop from a height of 2m (78 inches) onto concrete

**COMPLIANCE DATA**

**RFI/EMC**

**Safety**      IEC 60950-1 and related national standards


**RoHS**      All parts of the system are compliant with EU directive 2011/65/EU

**WARRANTY**

12-month warranty as standard (exclusions apply)  
Warranty can be extended for up to an additional three years at the time of purchase (exclusions apply).





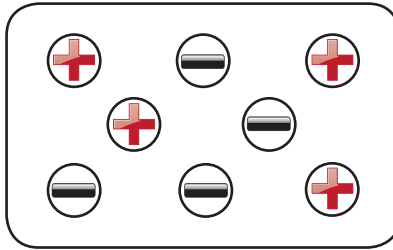



**WARNINGS**

- Ensure batteries are fitted with correct polarity



**Only use these battery types**

- 'AA' Alkaline Manganese (LR6)
  - 'AA' Lithium Iron Disulphide (FR6)
- 
- The Argus®4 AABP is not certified as intrinsically safe and therefore must not be operated in potentially flammable or explosive atmospheres.
  - Follow all user instructions for any batteries used in the Argus®4 AABP.
  - Do not use FR6 cells in firefighting applications.
  - Do not mix battery types. Replace all batteries at once.
  - The camera battery indicator has a very limited functionality with the AA battery pack.
  - This product is safe when used in accordance with these instructions.

|            | <br>>-10°C, 14°F<br>< 5°C, 40°F | 20°C / 70°F   |  >60°C / 140°F |
|------------|--|---|---|
| <b>FR6</b> |                                 |  |  <b>X</b>      |
| <b>LR6</b> |                                 |  |                |

Whilst e2v technologies has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v technologies accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.