Unit 9, 12 Mars Rd
Lane Cove NSW 2066
Australia

Tel: +61 2 9420 0690
Fax: +61 2 9420 0692
www.cap-xx.com

CAPXX (Australia) Pty Ltd
ABN 28 077 060 872
ACN 077 060 872

HW103 / HW203 SUPERCAPACITOR

Datasheet Rev3.0, April 2013

This Datasheet should be read in conjunction with the CAP-XX Supercapacitors Product Guide which contains information common to our product lines.

Electrical Specifications

The HW103 is a single cell supercapacitor. The HW203 is a dual cell supercapacitor with two HW103 cells in series, so HW203 capacitance = Capacitance of HW103/2 and HW203 ESR = 2 x HW103 ESR.

Table 1: Absolute Maximum Ratings

Parameter	Name		Conditions	Min	Typical	Max	Units
Terminal Voltage	Vpeak	HW103		0		2.9	V
		HW203				5.8	
Temperature	Tmax			-40		+85	°C

Table 2: Electrical Characteristics

Parameter	Name		Conditions	Min	Typical	Max	Units
Terminal Voltage	Vn	HW103		0		2.75	V
		HW203		0		5.5	
Capacitance	C	HW103	DC, 23°C	880	1100	1320	mF
		HW203		440	550	660	
ESR	ESR	HW103	DC, 23°C	36	45	54	mΩ
		HW203		72	90	108	
Leakage Current	I_L		2.7V, 23°C 120hrs		1	2	µA
RMS Current	I_{RMS}		23°C			5	A
Peak Current[1]	I_P		23°C			30	A

[1]Non-repetitive current, single pulse to discharge fully charged supercapacitor.

Table 3: Thickness

HW103F	**1.70mm**	No adhesive tape on underside of the supercapacitor	**HW103G**	**1.80mm**	Adhesive tape on underside, release tape removed
HW203F	**3.50mm**		**HW203G**	**3.60mm**	

Note: CAP-XX reserves the right to change the specification of its products and any data without notice.
CAP-XX products are not authorised for use in life support systems. © CAP-XX 2013

Definition of Terms

In its simplest form, the Equivalent Series Resistance (ESR) of a capacitor is the real part of the complex impedance. In the time domain, it can be found by applying a step discharge current to a charged cell as in Fig. 1. In this figure, the supercapacitor is pre-charged and then discharged with a current pulse, I =1A for duration 0.01 sec.

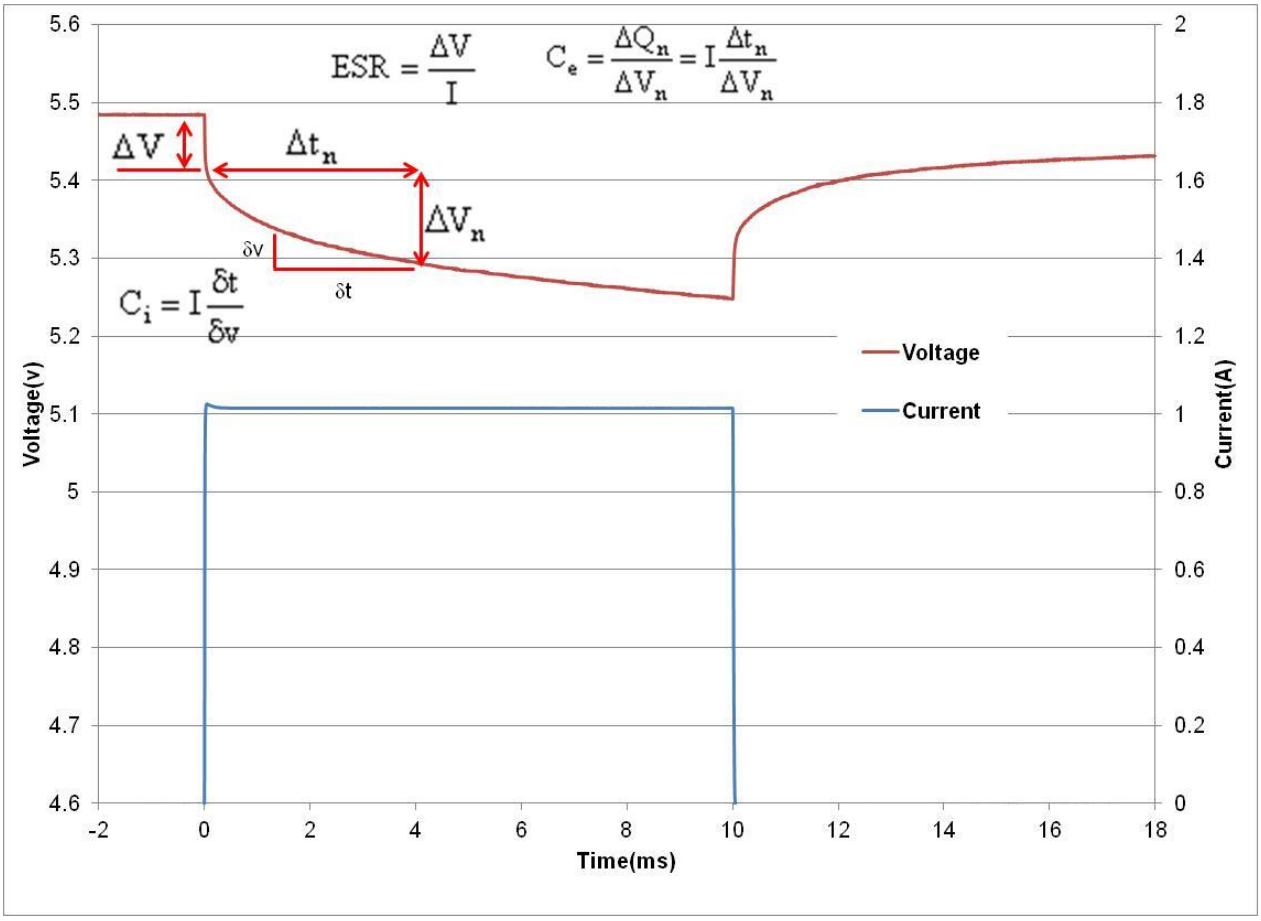

Figure 1: Effective capacitance, instantaneous capacitance and ESR for an HW203

The ESR is found by dividing the instantaneous voltage step (ΔV) by I. In this example = (5.484V-5.426V)/1.02A = 56.9mΩ.

The instantaneous capacitance (C_i) can be found by taking the inverse of the derivative of the voltage, and multiplying it by I.

The effective capacitance for a pulse of duration Δt_n, $Ce(\Delta t_n)$ is found by dividing the total charge removed from the capacitor (ΔQ_n) by the voltage lost by the capacitor (ΔV_n). For constant current $Ce(\Delta t_n) = I \times \Delta t_n/\Delta V_n$. Ce increases as the pulse width increases and tends to the DC capacitance value as the pulse width becomes very long (~10 secs). After 2msecs, Fig 1 shows the voltage drop V_{2ms} = (5.426 V – 5.323V) = 103mV. Therefore Ce(2ms) = 1.02A x 2ms/103mV = 19.8mF. After 10ms, the voltage drop = 5.426 V – 5.249V = 177mV. Therefore Ce(10ms) = 1.02 A x 10ms/177mV = 57.6mF. The DC capacitance of an HW203 = 550mF. Note that ΔV, or IR drop, is not included because very little charge is removed from the capacitor during this time. Ce shows the time response of the capacitor and it is useful for predicting circuit behavior in pulsed applications. Use the Ce for your pulsewidth to calculate

Note: CAP-XX reserves the right to change the specification of its products and any data without notice.
CAP-XX products are not authorised for use in life support systems. © CAP-XX 2013

Measurement of DC Capacitance

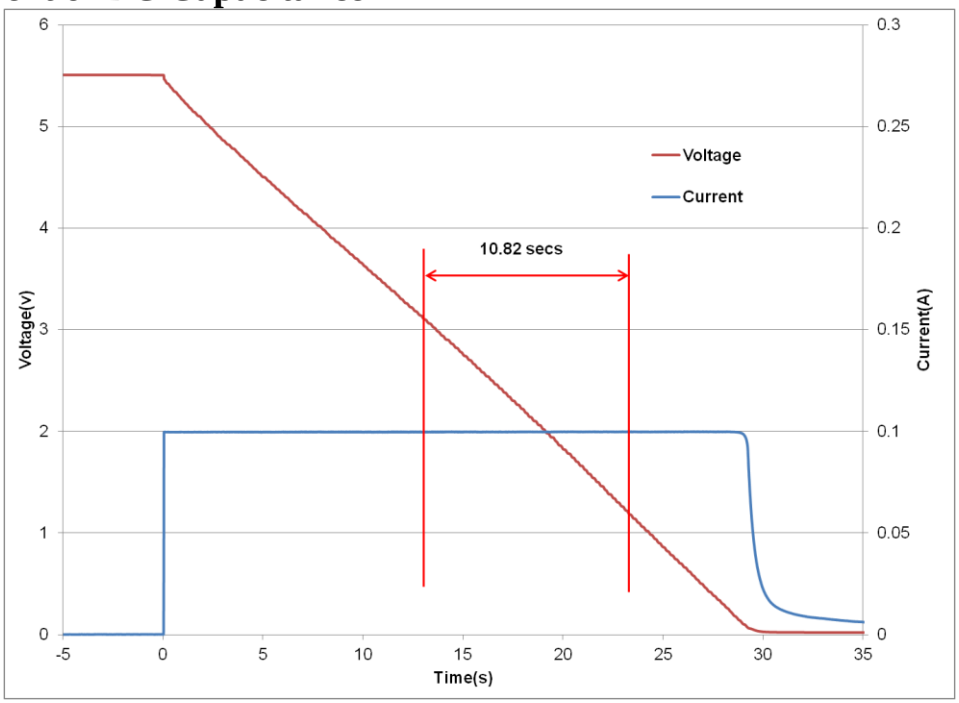

Fig 2: Measurement of DC Capacitance for an HW203

Fig 2 shows the measurement of DC capacitance by drawing a constant 100mA current from a fully charged supercapacitor and measuring the time taken to discharge from 1.5V to 0.5V for a single cell, or from 3V to 1V for a dual cell supercapacitor. In this case, C = 0.1A x 10.82s /2V = 541mF, which is well within the 550mF +/- 20% tolerance for an HW203 cell.

Measurement of ESR

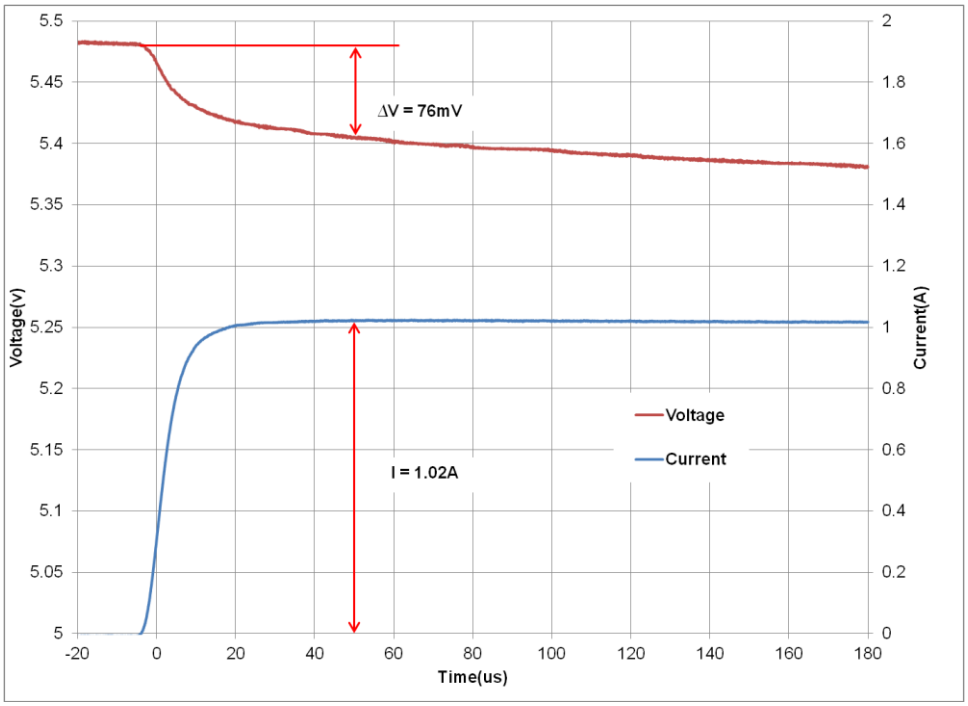

Fig 3: Measurement of ESR for an HW203

Fig 3 shows DC measurement of ESR by applying a step load current to the supercapacitor and measuring the resulting voltage drop. CAP-XX waits for a delay of 50µs after the step current is applied to ensure the voltage and current have settled. In this case the ESR is measured as 76mV/1.02A = 74.5mΩ.

Note: CAP-XX reserves the right to change the specification of its products and any data without notice.
CAP-XX products are not authorised for use in life support systems. © CAP-XX 2013

Effective Capacitance

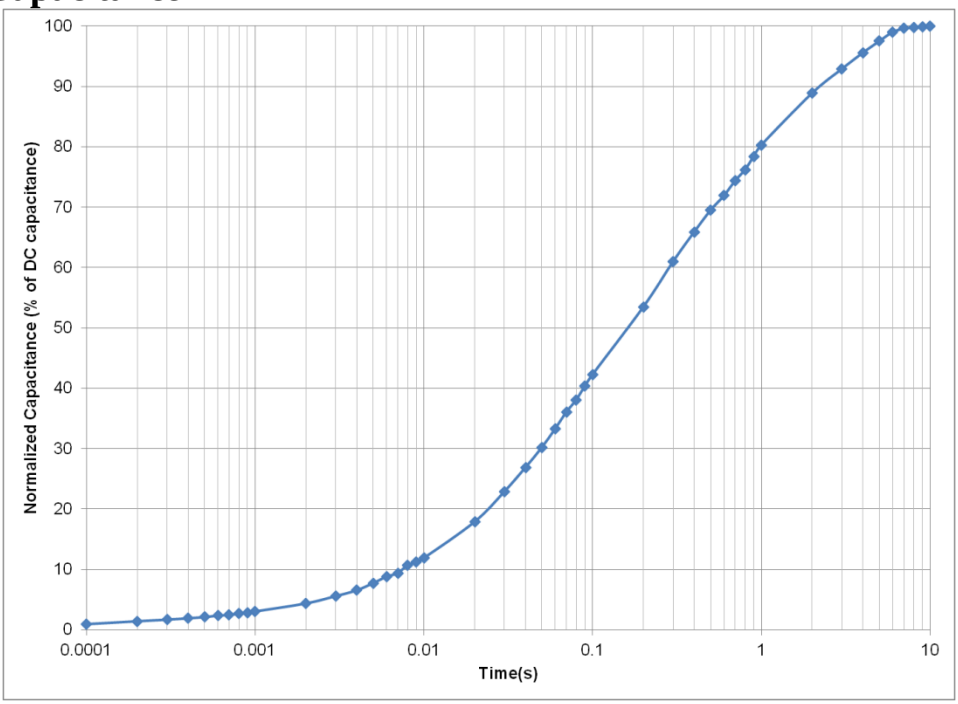

Figure 4: Effective Capacitance

Fig 4 shows the effective capacitance for the HW103, HW203 @ 23°C. This shows that for a 1msec PW, you will measure 4% of DC capacitance or 44mF for an HW103 or 22mF for an HW203. At 10msecs you will measure 12% of the DC capacitance, and at 100msecs you will measure 42% of DC capacitance. Ceffective is a time domain representation of the supercapacitor's frequency response. If, for example, you were calculating the voltage drop if the supercapacitor was supporting 1A for 10msecs, then you would use the Ceff(10msecs) = 12% of DC capacitance = 66mF for an HW203, so Vdrop = 1A x ESR + 1A x duration/C = 1A x 90mΩ + 1A x 10ms / 66mF = 241.5mV. The next section on pulse response shows how the effective capacitance is sufficient for even short pulse widths.

Pulse Response

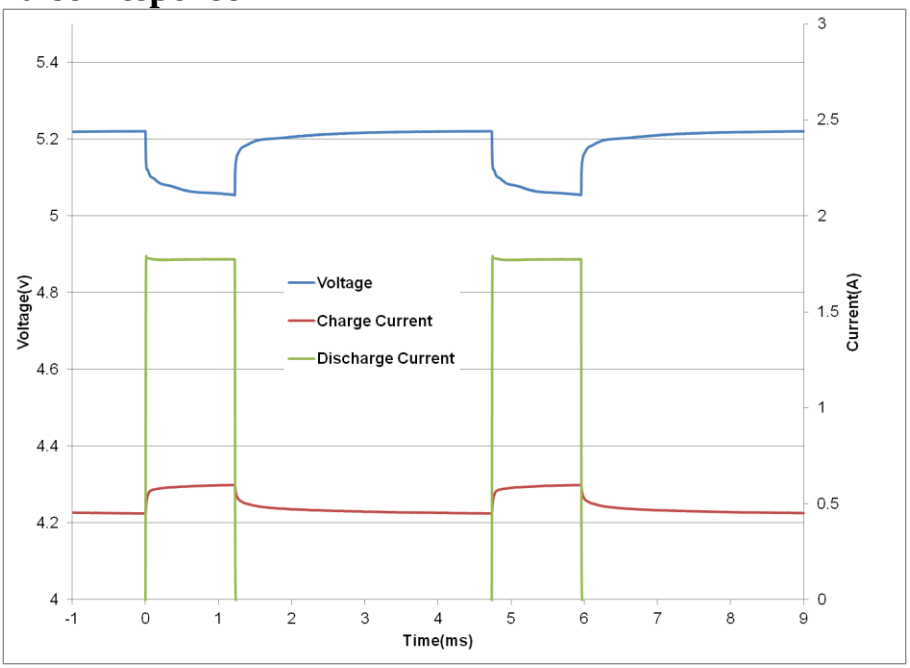

Fig 5 shows that the HW203 supercapacitor does an excellent job supporting a GPRS class 10 pulse train, drawing 1.8A for 1.1ms at 25% duty cycle. The source is current limited to 0.6A and the supercapacitor provides the 1.2A difference to achieve the peak current. At first glance the freq response of Fig 8 indicates the supercapacacitor would not support a 1ms pulse, but the Ceff of 22mF coupled with the low ESR supports this pulse train with only ~165mV droop in the supply rail.

Fig 5: HW203 Pulse Response with GPRS Class 10 Pulse Train

Note: CAP-XX reserves the right to change the specification of its products and any data without notice.
CAP-XX products are not authorised for use in life support systems. © CAP-XX 2013

DC Capacitance variation with temperature

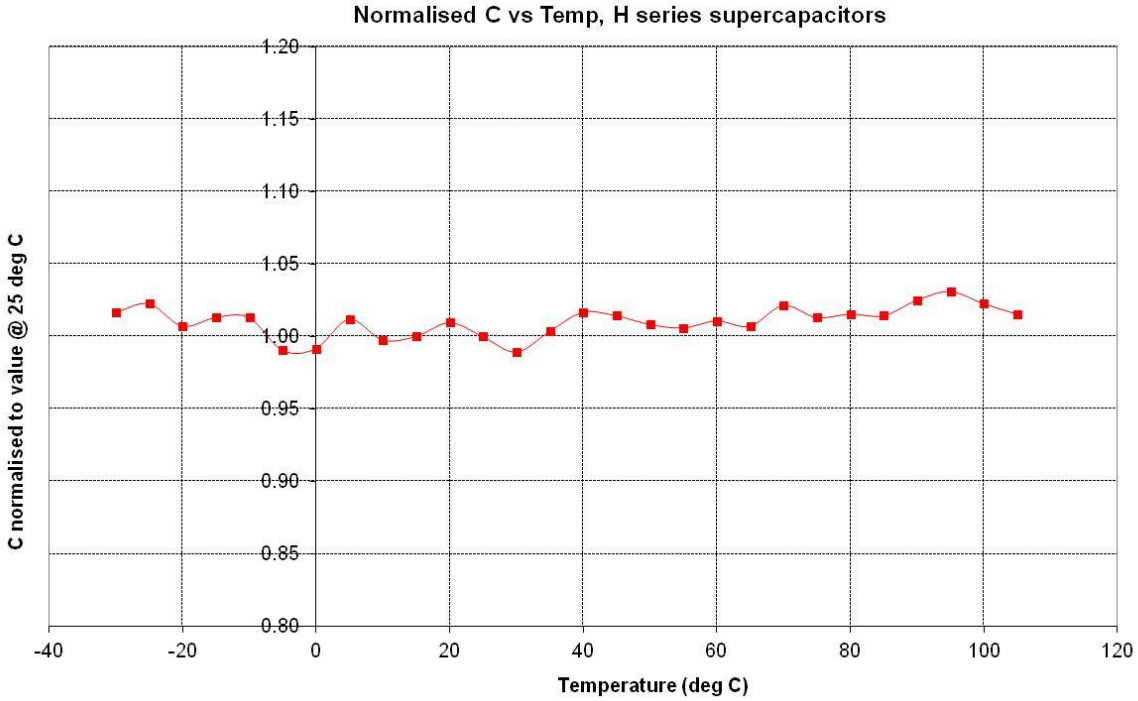

Figure 6: Capacitance change with temperature

Fig 6 shows that DC capacitance is approximately constant with temperature.

ESR variation with temperature

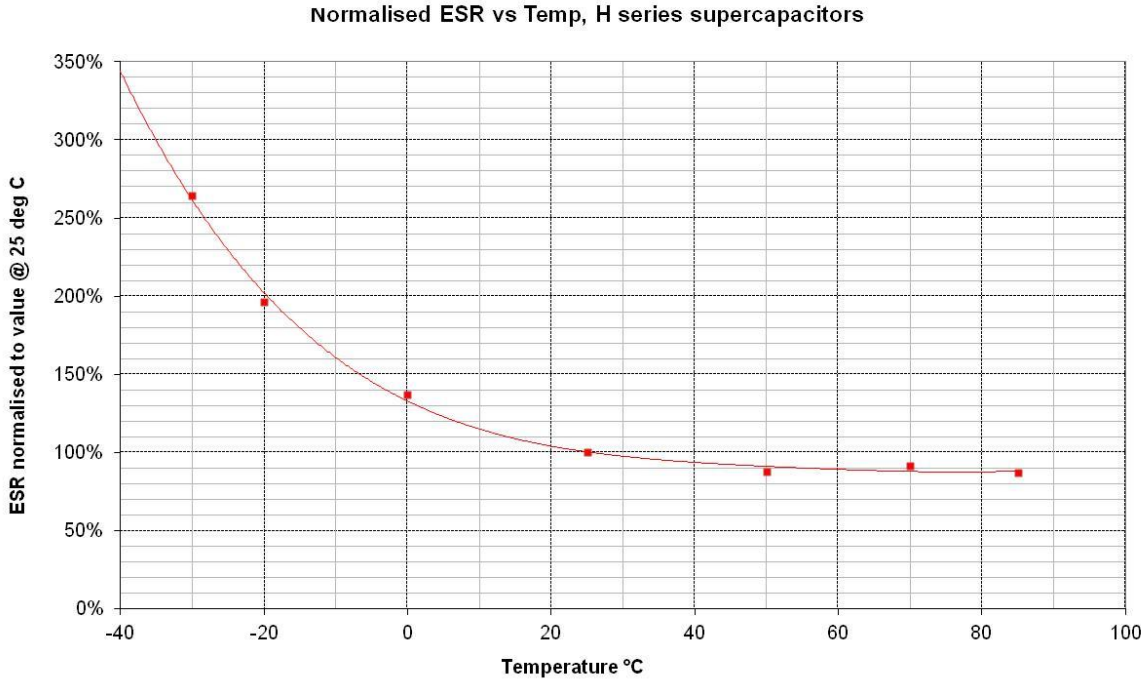

Figure 7: ESR change with temperature

Fig 7 shows that ESR at -40°C is ~3.5 x ESR at room temp, and that ESR at 70ºC is ~0.9 x ESR at room temperature.

Note: CAP-XX reserves the right to change the specification of its products and any data without notice.
CAP-XX products are not authorised for use in life support systems. © CAP-XX 2013

Frequency Response

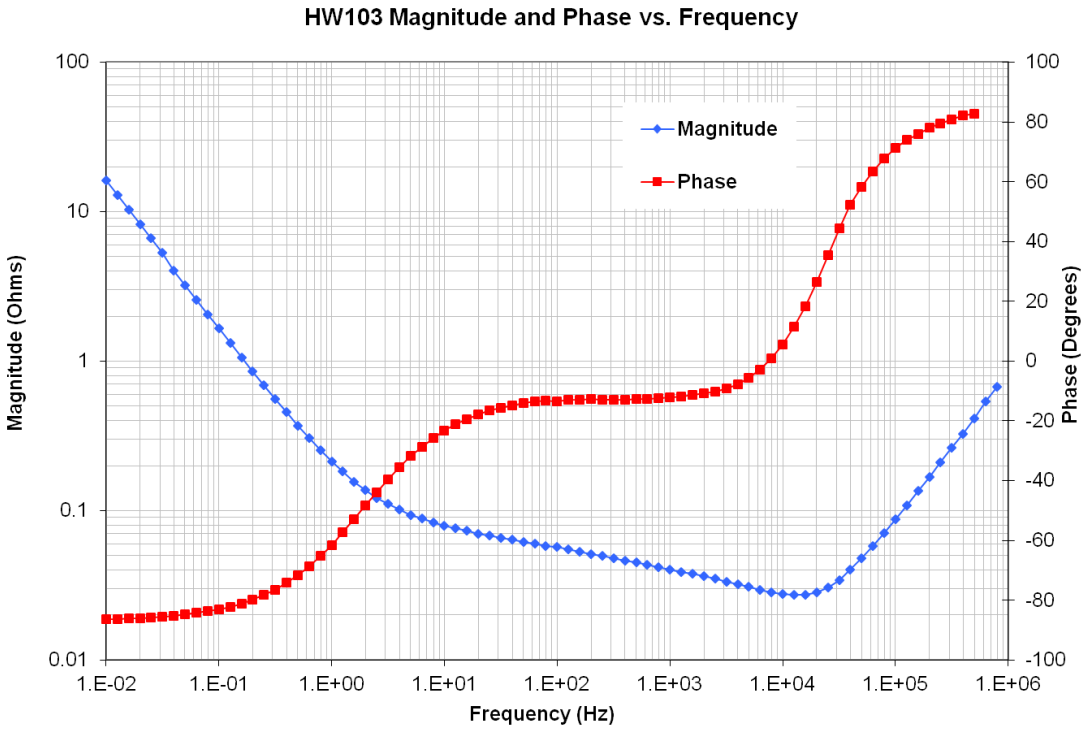

Fig 8: Frequency Response of Impedance (biased at 2.5V with a 50mV test signal)

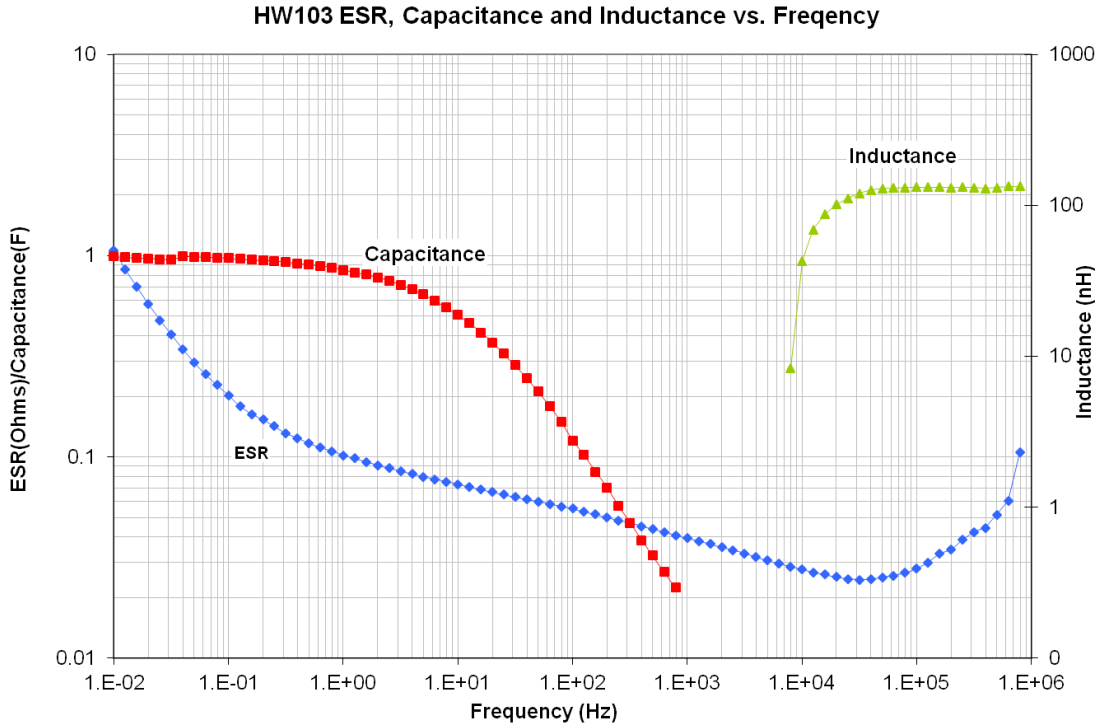

Fig 9: Frequency Response of ESR, Capacitance & Inductance

Fig 8 shows the supercapacitor behaves as an ideal capacitor until approx 2 Hz when the magnitude no longer rolls off proportionally to 1/freq and the phase crosses -45°. Performance of supercapacitors with frequency is complex and the best predictor of performance is Fig 4 showing effective capacitance as a function of pulsewidth.

Note: CAP-XX reserves the right to change the specification of its products and any data without notice.
CAP-XX products are not authorised for use in life support systems. © CAP-XX 2013

Leakage Current

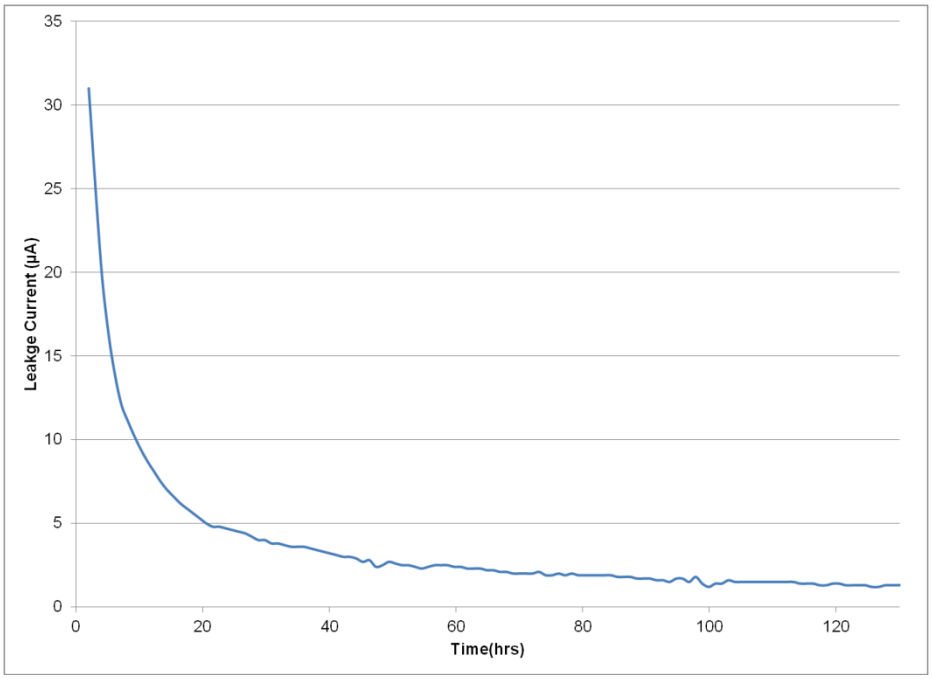

Fig 10: Leakage Current

Fig 10 shows the leakage current for HW103 at room temperature. The leakage current decays over time, and the equilibrium value leakage current will be reached after ~120hrs at room temperature. The typical equilibrium leakage current is 1µA at room temperature. At 70°C leakage current will be ~5µA.

Charge Current

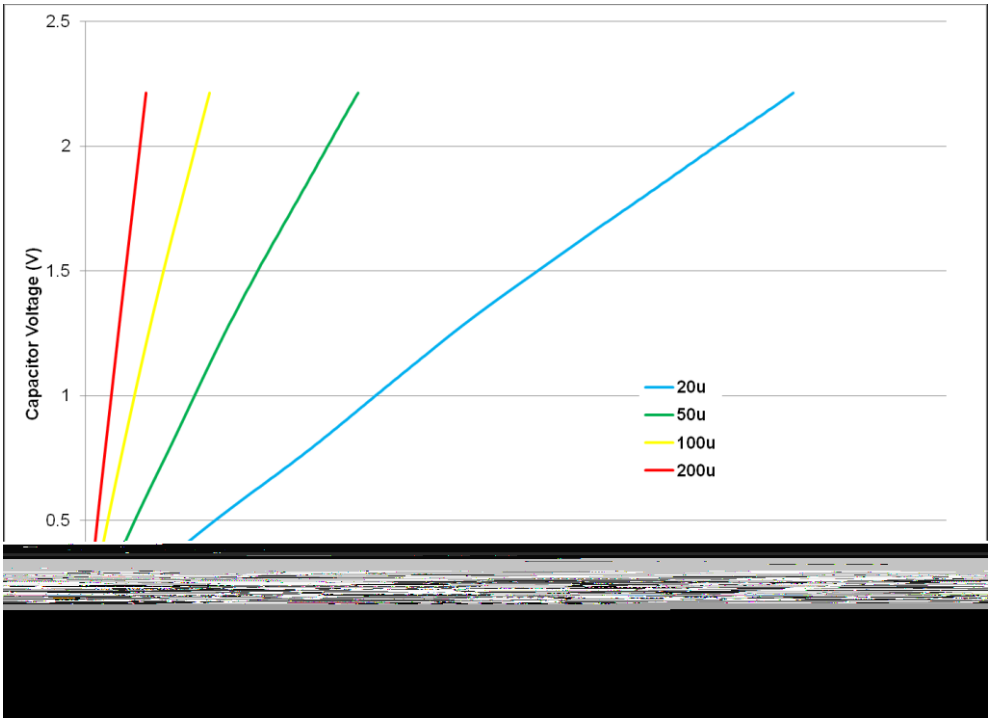

Fig 11: Charging an HW103 with low current

The corollary to the slow decay in leakage currents shown in Fig 10 is that charging a supercapacitor at very low currents takes longer than theory predicts. At higher charge currents, the charge rate is as theory predicts. For example, it should take 1.1Fx 2.3V / 0.00002A = 35.1hrs to charge a 1.1 F supercapacitor to 2.3V at 20µA, but Fig 11 shows it took 50hrs. At 100µA charging occurs at a rate close to the theoretical rate.

Note: CAP-XX reserves the right to change the specification of its products and any data without notice.
CAP-XX products are not authorised for use in life support systems. © CAP-XX 2013