

IT CAN NEVER

B² LOUD

RAGE CFM 8P



8"

Chassis diameter

300 W

MAX power

93.8 DB

Sensitivity

60 HZ-10 KHZ

Response Range

1.5" / 38 MM

EICCW Voice Coil

ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	8"
MAX Power*	300 Watts
RMS Power	100 Watts
Impedance	3.3 Ohm
Resonance(natural) Frequency	78 Hz
Frequency Response	60 Hz -10 KHz
Sensitivity	93.8 dB (2.83V)
Voice Coil Diameter	1.5" / 38 mm
Winding Material	EICCW
Magnet Type	Ferrite
Magnet	120 * 20 mm
Cone Material	Carbon Fiber
Surround Type	Santoprene
Displacement	0.03 cu. ft / 0.83 L


MOUNTING/SHIPPING INFORMATION

Overall Diameter	8"
Baffle cutout Diameter	7.01 / 178 in/mm
Mounting Depth	2.67 / 68 in/mm
Total Depth	2.87 / 73 in/mm
Net Weight(1 PC)	kgs
Shipping Weight (set)	kgs
Shipping Master Box / 2 pairs	461 x 231 x 120 mm

THIELE SMALL PARAMETERS

FS	78 Hz
Vas	14.74
RE	3.3 Ohm
Qms	12.4
Qes	1.15
Qts	1.05
Cms	244 um/N
BL	4.9
MMS	16.8 G
Xmax (one way)	4 mm
SD	206 cm ²
Efficiency	0.6%
Le(1 KHz)	0.59
EBP	68.3

FREQUENCY RESPONSE CHART

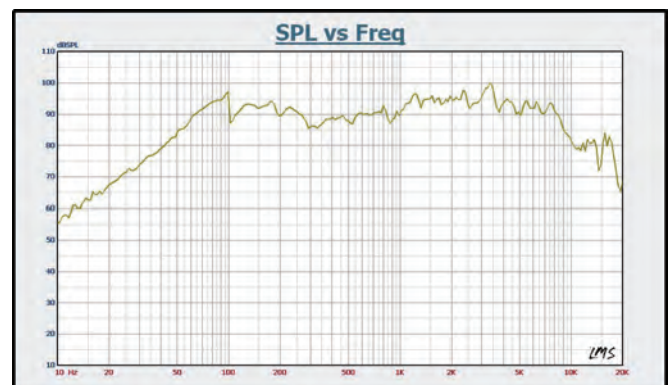

* Peak power handling test. Pink noise butterworth filtered at 12 dB per octave with cutoff frequency of 100 Hz.

* Please note that the frequency response measurements are supplied for comparison only and are not a measure of the low frequency performance which may be achieved in a fully optimised system.