

CONTACT GRILL L400

Project
Rev.:
Zone:
Location:



CODICE
CR0856069

MODELLO
6NCW/E400

SERIE
SERIE 600

GENERAL CHARACTERISTICS

A line of small-sized cooking equipment designed for those who, even in small spaces, do not want to give up great performance. Made of AISI 304 18/10 stainless steel, finely finished with Scotch Brite satin finish, it has rounded edges and large capacity enclosures; it has 600/650 mm depth and modular width of 400/600/700/800/1000 mm; the series is completed by open, armored or refrigerated base supports.

The equipment is easily modular to one another until it forms a compact, gap-free whole thanks to a leak-covering profile that provides protection against leakage and thus maximum hygiene. High chimneys, ergonomic knobs mounted on a sloping dashboard for easy visibility, give the range ease of use from the first approach.

All models are CE approved.



MODEL SPECIFICATIONS

- The heating element assembly is mounted on a tilting stand, held in the working or cleaning position by a locking pin.

TECHNICAL SPECIFICATIONS

- The Contact grill is equipped with a group of AISI 304 electric heating elements powered by an oval section for direct cooking.
- GN 1/1 pan for the 400 model and GN 2/1 pan for the 800 model with humidifier function and removable grease collection for cleaning operations.
- Temperature controlled by energy controller.
- The heating element assembly is mounted on a tilting stand, held in the working or cleaning position by a locking pin.
- The cleaning of the firing surface is done by pyrolysis effect with the help of a rake appropriately shaped to the geometry of the heating elements.

CONTACT GRILL L400

Project
Rev.:
Zone:
Location:



CODICE
CR0856069

MODELLO
6NCW/E400

SERIE
SERIE 600

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0856069
DEFINITION	CUOCIWURSTEL EL.60 M40 6NCW/E400
COMMERCIAL LINE	SERIE 600
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. DEPTH	600 mm
DIM. HEIGHT	295 mm
NET WEIGHT	23.4 Kg
VOLUME (net)	0.071
PACKAGE LENGTH	430 mm
PACKAGE WIDTH	690 mm
PACKAGING HEIGHT	500 mm
PACKAGE VOLUME	0,148 m3
GROSS PACKING WEIGHT	29 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	4,080 kW
IP GRADE	IPX3
CERTIFIED MODEL	6NCW/E400

CONTACT GRILL L400

Project
 Rev.:
 Zone:
 Location:




CODICE
CR0856069

MODELLO
6NCW/E400

SERIE
SERIE 600

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
 MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

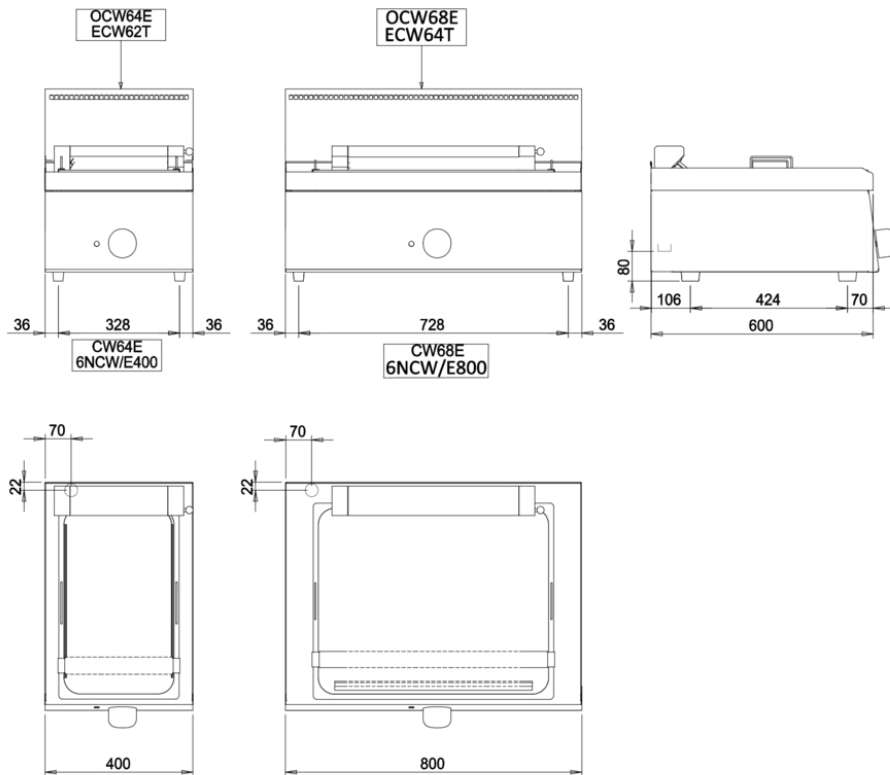

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel

CONTACT GRILL L400

Project
Rev.:
Zone:
Location:



CODICE
CR0856069

MODELLO
6NCW/E400

SERIE
SERIE 600

PRODUCT'S RANGE PLUS

Equipment is certified and
compliant with the Low Voltage
Directive 2014/35/EU according to
the international CB scheme

