

# GAS FRY TOP SMOOTH PLATE L400

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0999759

MODELLO  
N6FT/G400

SERIE  
SERIE 600

## GENERAL CHARACTERISTICS

A line of small-sized cooking equipment designed for those who, even in small spaces, do not want to give up great performance. Made of AISI 304 18/10 stainless steel, finely finished with Scotch Brite satin finish, it has rounded edges and large capacity enclosures; it has 600/650 mm depth and modular width of 400/600/700/800/1000 mm; the series is completed by open, armored or refrigerated base supports.

The equipment is easily modular to one another until it forms a compact, gap-free whole thanks to a leak-covering profile that provides protection against leakage and thus maximum hygiene. High chimneys, ergonomic knobs mounted on a sloping dashboard for easy visibility, give the range ease of use from the first approach.

All models are CE approved.



## MODEL SPECIFICATIONS

## TECHNICAL SPECIFICATIONS

- Chromed, mild steel (extra EU) and AISI430 cooking plates in various sizes and shapes are heated by gas burners or high-powered electric heating elements, such as to ensure rapid temperature rise and maintenance of the chosen values.
- For non-chromed gas models, the temperature is adjustable from 120-280°C, for the chromed version from 90-250°C, and for electric from 0 to 300°C.
- The plates are equipped with splash guards so as to ensure perfect cleanliness and hygiene of the cooking surface.
- The work surface is slightly inclined so as to channel sauces, fats and condiments, into the large-capacity collection drawer.
- Gas models are equipped with piezo ignition, pilot flame, thermocouple and valved faucet to ensure maximum safety.

# GAS FRY TOP SMOOTH PLATE L400

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0999759

MODELLO  
N6FT/G400

SERIE  
SERIE 600

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0999759
DEFINITION	N6FT/G400 FTG L 60 M40
COMMERCIAL LINE	SERIE 600
SUPPLY	GAS
DIM. WIDTH	400 mm
DIM. DEPTH	650 mm
DIM. HEIGHT	295 mm
NET WEIGHT	37 Kg
VOLUME (net)	0.077
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	740 mm
PACKAGING HEIGHT	680 mm
PACKAGE VOLUME	0,220 m3
GROSS PACKING WEIGHT	43 Kg
GAS POWER	6,50
GAS POWER (G25.3/25mbar)	6,25
CERTIFIED MODEL	N6FT/G400

# GAS FRY TOP SMOOTH PLATE L400

Project .....  
 Rev.: .....  
 Zone: .....  
 Location: .....



CODICE  
CR0999759

MODELLO  
N6FT/G400

SERIE  
SERIE 600


## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
 MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

FT64G..  
6NFT/G400..  
OFT64G..  
EBG62T..

FT66G..  
6NFT/G600..  
OFT66G..  
EBG63T..

FT68G..  
6NFT/G800..  
OFT68G..  
EBG64T..

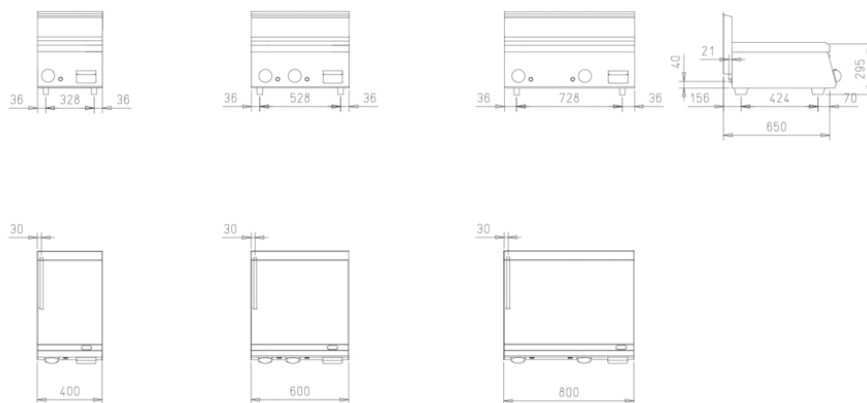

### Legenda - Legende - Key - Legende - Leyenda - Legenda - Legenda

- G Attacco arrivo gas - Gasanschluss - Gas connection  
 Arrivée gaz - Union da gas - Gasaansluiting -  
 EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)

## GAS FRY TOP SMOOTH PLATE L400

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0999759

MODELLO  
N6FT/G400

SERIE  
SERIE 600

# PRODUCT'S RANGE PLUS



The fry tops are equipped with a perimeter splash guard and a removable drip tray.



Thermostat gas versions with made-in-Italy regulation valve, which allows precise temperature control 110°C - 280°C , even for the most delicate cooking