

ELECTRIC BAIN-MARIE - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1014549

MODELLO
Q70BM/E410

SERIE
QUEEN 7

GENERAL CHARACTERISTICS

For those who do not want to give up the quality and solidity of a Queen stove, the Series 7 offers a 700 mm depth and more compact dimensions to fit any room, burners available in various configurations and wattages, enhanced by the refined Scotch Brite finish.

Thanks to its extreme compositional freedom, every composition is possible: you can combine Model i tops with accessorizable oven and neutral bases and hygienic finishes; create customized solutions by matching and attaching equipment back to back, sideways "flush" perfectly sealed, or "bridge" structures, offering high-level solutions that always perfectly meet the chef's needs.

As a total guarantee, all equipment that make up a Queen7 kitchen are certified in compliance with international standards, including CE, GAR, AGA and others.



MODEL SPECIFICATIONS

- Different GN tray combinations Examples: M40: 1xGN1/3 + 1xGN 1/1 M80: 2xGN1/3 + 2xGN 1/1
- Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.
- Thanks to the jet-proofing certification obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.
- The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

TECHNICAL SPECIFICATIONS

- Suitable for maintaining dishes at a temperature below 100° and for very delicate cooking.
- Module of 40: Tank size 1xGN 1/1
- Module of 80: Tank size 2xGN 1/1
- Heated by armored heating elements placed externally to the tank.
- Control thermostat.

ELECTRIC BAIN-MARIE - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1014549

MODELLO
Q70BM/E410

SERIE
QUEEN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1014549
DEFINITION	Q70BM/E410 BAGNOMARIA EL. M40 TOP
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. DEPTH	700 mm
DIM. HEIGHT	250 mm
NET WEIGHT	22 Kg
VOLUME (net)	0.07
PACKAGE LENGTH	460 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,223 m3
GROSS PACKING WEIGHT	29 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	1,800 kW
IP GRADE	IPX4
CERTIFIED MODEL	Q70BM/E410

ELECTRIC BAIN-MARIE - TOP VERSION

Project
 Rev.:
 Zone:
 Location:




CODICE
CR1014549

MODELLO
Q70BM/E410

SERIE
QUEEN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
 MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

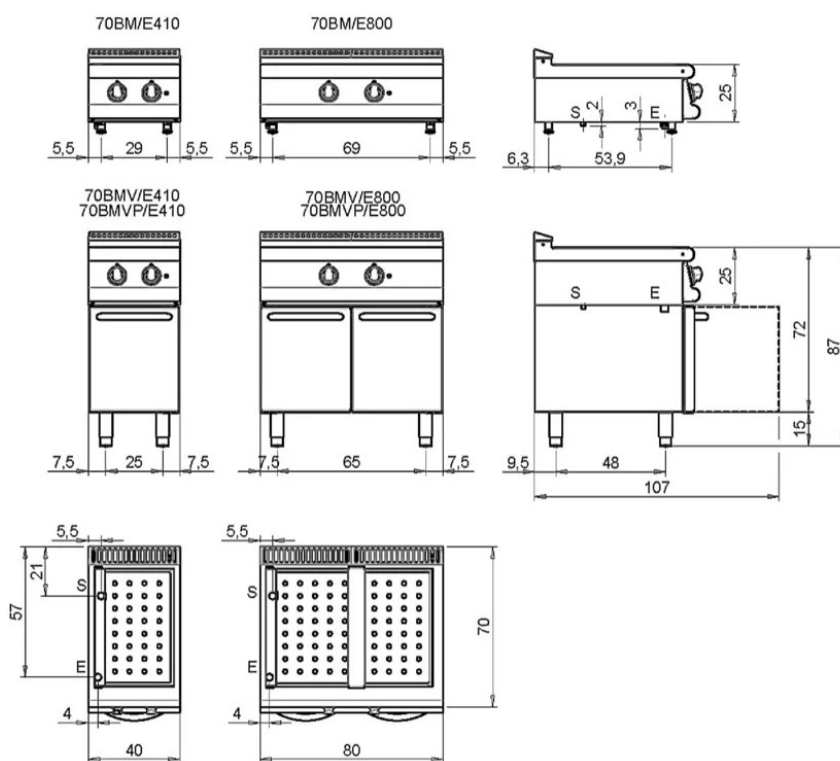

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligaçao gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN 10226-1 R 1/2	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaud - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	

1

ELECTRIC BAIN-MARIE - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1014549

MODELLO
Q70BM/E410

SERIE
QUEEN 7

PRODUCT'S RANGE PLUS



Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Integrated water dispenser in tank



Different GN basin combinations
Examples:
M40: 1xGN 1/1 or 3xGN1/3
M80: 3xGN1/3 + 1xGN 1/