

TWO POST LIFT SINGLE POINT MANUAL RELEASE




Available colors



*Customised colours available upon request

ARCH 5.0MH
ARCH 4.5MH
ARCH 4.0MH

ARCH 5.0,4.5,4.0 MH

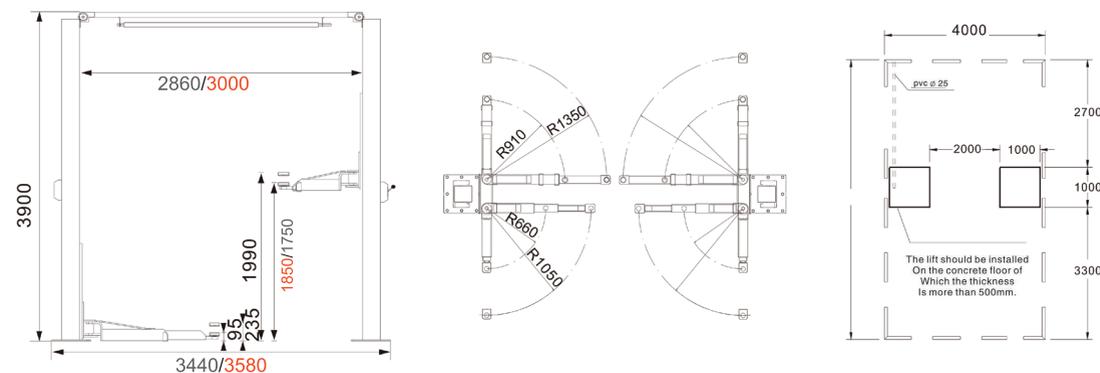

■ ARCH 5.0MH/4.5MH ■ ARCH 4.0MH

STANDARD FEATURES

- Hydraulic Cylinders with excellent finish and connectivity made of high rotation speed CNC.
- High quality Japanese oil seals for longer life.
- Polymer wear-resistance slider
- Clear floor installation.

SAFETY FEATURES

- Overload protection.
- Direct drive twin cylinders, with safety steel wire for synchronization and stability.
- Single point lock release ensures higher safety and easier operation.
- Locks with high quality tooth type ratchets for safe operation.
- Limit switch Roof protection safety device stops the vehicle from any damage.
- Automatic arm lock prevents the vehicle from moving while in the raised position.

TECHINICAL DETAILS

Model	LockType	Capacity	Min Height	Total Height	Total Width	Lifting Height	Inner Width	Rise/Decent	Motor Power
ARCH 5.0MH	Single Point Manual	5000 kgs	95 mm	3900 mm	3580 mm	1850 mm	3000mm	50/30 sec	3.0KW, 3PH/380V/50HZ
ARCH 4.5MH	Single Point Manual	4500 kgs	95 mm	3900 mm	3580 mm	1850 mm	3000 mm	50/30 sec	3.0KW, 3PH/380V/50HZ
ARCH 4.0MH	Single Point Manual	4000 kgs	95 mm	3900 mm	3440 mm	1750 mm	2860 mm	50/30 sec	3.0KW, 3PH/380V/50HZ

