

## ELECTROHYDRAULIC FOUR POST LIFT FOR WHEEL ALIGNMENT



### QUAD 4.5, 5.5, 6.0WA

#### STANDARD FEATURES

- Hydraulic Cylinders with excellent finish and connectivity made of high rotation speed CNC
- High quality Japanese oil seals for longer life.
- Four Post Lift for Wheel Alignment
- Motor with Aluminium body for higher durability


#### SAFETY FEATURES

- Overload protection
- Lift with safety steel wire for synchronization and stability
- Broken rope safety protection


#### OPTIONAL ACCESSORIES

- Center Jack
- Industrial Wireless Remote Control System


### QUAD 4.5 WA

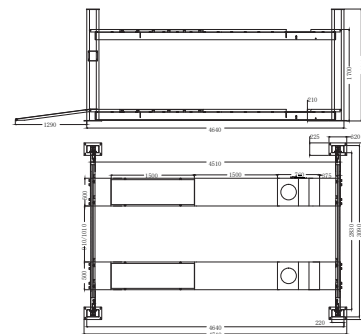

### QUAD 5.5 WA

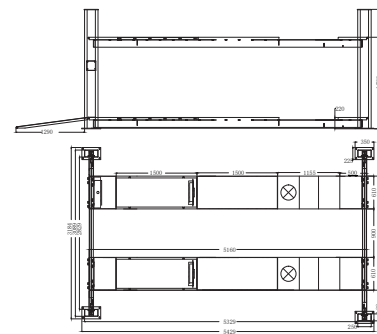

### QUAD 6.0 WA

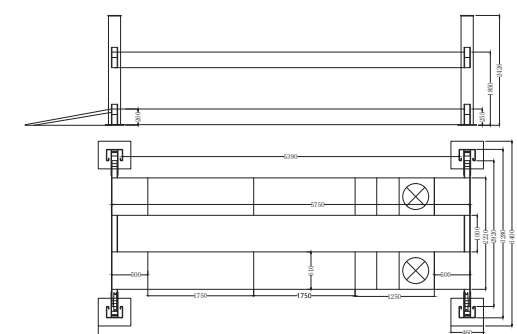

#### Available colors



\*Customised colours available upon request

#### TECHNICAL DETAILS

Model	Capacity	Minimum Height	Maximum Raise	Total Height	Inner Width	Platform Length	Platform Width	Air Pressure	Motor Power
QUAD 4.5 WA	4500 kgs	210 mm	1700 mm	2018 mm	2830 mm	4510 mm	500 mm	6 - 8 bar	3.0 KW, 3PH/380V/ 50HZ
QUAD 5.5 WA	5500 kgs	220 mm	1700 mm	2018 mm	2830 mm	5160 mm	610 mm	6 - 8 bar	3.0KW, 3PH/380V/50HZ
QUAD 6.0 WA	6000 kgs	260 mm	1850 mm	2418 mm	2920 mm	5374 mm	610 mm	6 - 8 bar	3.0KW, 3PH/380V/50HZ