


Globe Wall EI

resistant to fire wall panel



IS THE SPECIFIC FLAT PANEL FOR WALLS IN ITS "PLANK", "SLATTED" AND "SMOOTH" VERSIONS. IN POLYISOCYANURATE IS 100 MM THICK.

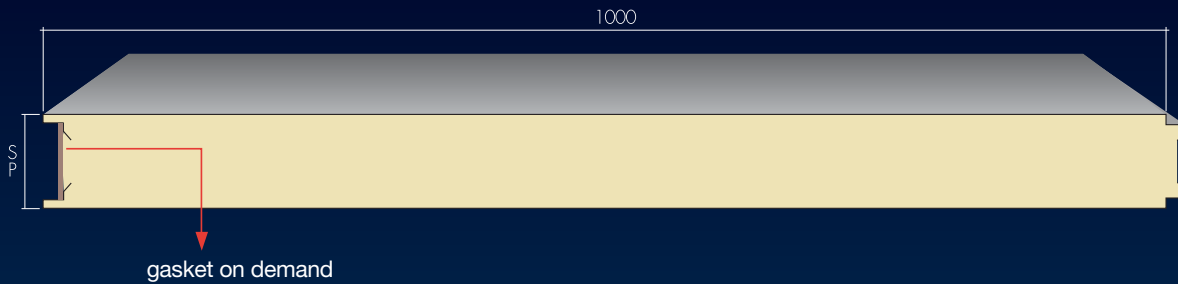

Thermal characteristics

	PANEL NOMINAL THICKNESS (mm)
U	100
transmittance	
W/m ² K	0.229
Kcal/m ² h °C	0.197

External facing: steel 0.4 mm. - Internal facing: steel 0.4 mm.

PANEL THICKNESS (mm)	DISTANCE BETWEEN SUPPORTS (ml)										WEIGHT (Kg/m ²)
	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	
100	515	385	305	240	175	135	105	85			9.90

Calculation for static sizing according to the Annex E of the UNI EN 14509 standard
Deflection limit 1/200 ℓ

