




## NZ-50

- Motor power: 1,5 kW
- Rotor volume: 4,5 l
- Max. flow rate: 50 l/min
- Acceleration: 950 x g
- Separation capacity: >5  $\mu\text{m}$
- Sludge capacity: 6 kg

## Centrifugal Separator NZ-50

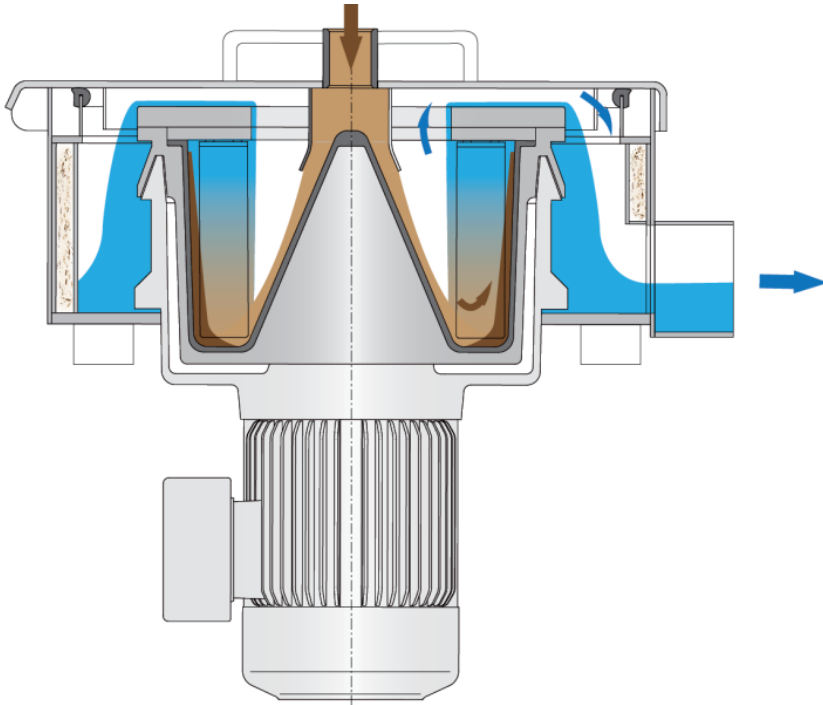

- Direct drive
- Free backflow of purified fluid
- Compact design

- NZ-50 sludge insert



## NZ-50 Sludge removal procedure

open housing cover

remove driver insert

lift out dilled sludge cage

install spare sludge case

remount driver insert and close cover

The whole procedre takes 2 to 3 min!





NZ-50 installation examples



## Kontakt:

STA Separatoren-Technik &  
Anlagenbau GmbH

Obere Giesswiesen 32  
D-78247 Hilzingen

Tel.: +49 (0)7731 / 9243-0  
Fax: +49 (0)7731 / 9243-11

Email: [info@sta-separator.de](mailto:info@sta-separator.de)  
[www.sta-separator.de](http://www.sta-separator.de)