



ALU REMOVABLE JIB CRANE

COMALU 300

**Max. capacity
300 kg**

Span = 2 m

1 bag of 24 kg

Easy assembly

**1 unique
removable jib
crane for many
locations**

Removable lifting solution, efficient and safe the jib crane COMALU contributes to improving the responsiveness of your teams. Its aluminum frame guarantee you maximum portability and facilitates interventions on sites difficult to access. A single man can so proceed safely to the assembly of 3 elements which compose the jib crane COMALU.





STANDARD EQUIPMENT

CMU 300 Kg - Span 2 m max	Only 1 bag provided
Adjustable span from 900mm to 2000 mm	Fitting the pivot on ball bearings
2 heights available (2 extensions provided)	Powder coating on anodized
Jib crane in 3 parts / installation very fast	2 stainless shackles for hoist or accessory
Set weight = 24KG	


OPTIONS

Stainless steel load cable : length 1m
Jib crane extension
Galvanized lifting winch with stainless steel pulleys and cable
Winch for persons lifting with fall protection
Socket fixed to the floor, wall, or sealed

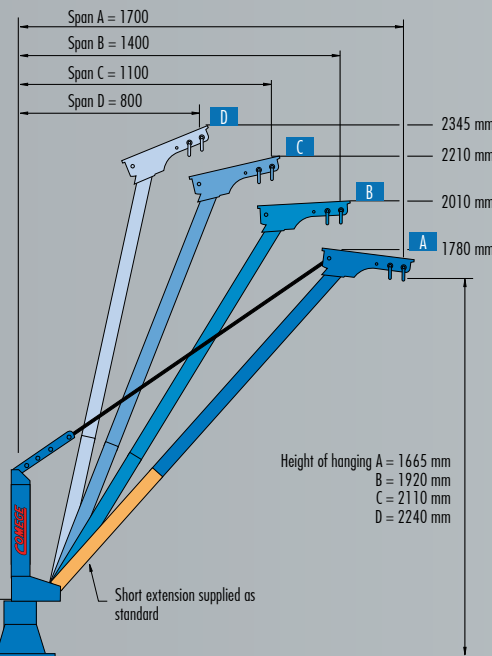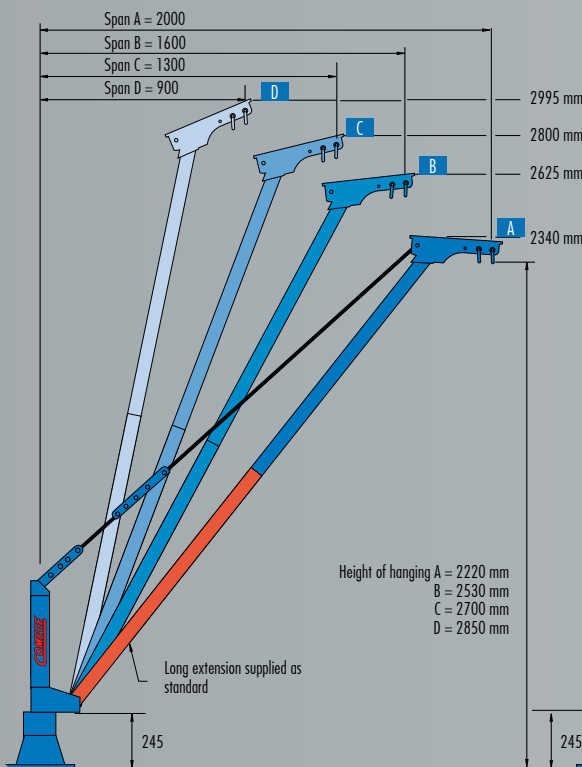

1 JIB CRANE = 2 POSSIBLE METHODS OF ASSEMBLY

Carry bag (included) gives your team the ideal tool for interventions on site quickly and efficiently. All the parts that make up the COMALU-300 is grouped into one sturdy bag. A single person can carry the jib crane, assemble, place on the base and make the lift safely.

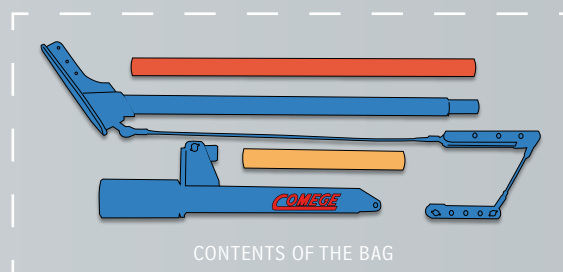

CONTENTS OF THE BAG

1 jib crane = 1 bag of 24 Kg



MOUNTING ON THE SOCKET



ASSEMBLY OF THE EXTENSION



ARM ASSEMBLY




FIXATION WITH PULLING THE PIN



IMPLEMENTATION OF THE HOIST

Get in standard 8 span-height couples. It is the ideal jib crane for lifting loads and people in treatment plant or by the sea, and generally anywhere a standard jib crane can not be used. Secure sockets and enjoy the lightness of a single removable jib crane for many configurations.

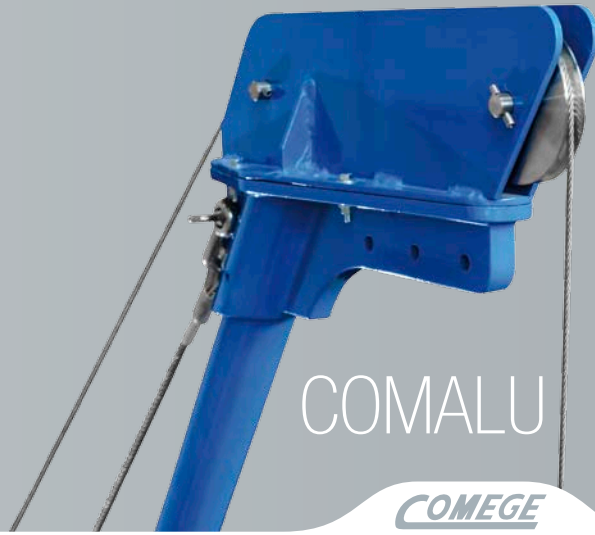

ALU REMOVABLE JIB CRANE WITH WINCH

COMALU

300 T

COMEGE

Max. capacity
300 kg

Span 2 m

2 bags

Easy assembly


A single removable jib crane with winch for many locations

STANDARD EQUIPMENT

CMU 300 Kg - Span 2 m max	2 carry bag provided
Adjustable span from 900mm to 2000 mm	Fitting the pivot on ball bearings
2 heights available (2 extensions provided)	Powder coating on anodized
Jib crane in 4 parts / installation very fast	2 stainless shackles for hoist or accessory
Set weight = 2 bags of less than 24Kg	1 stainless winch


OPTIONS

Stainless steel load cable : length 1m
Jib crane extension
Galvanized lifting winch with stainless steel pulleys and cable
Winch for persons lifting with fall protection
Socket fixed to the floor, wall, or sealed

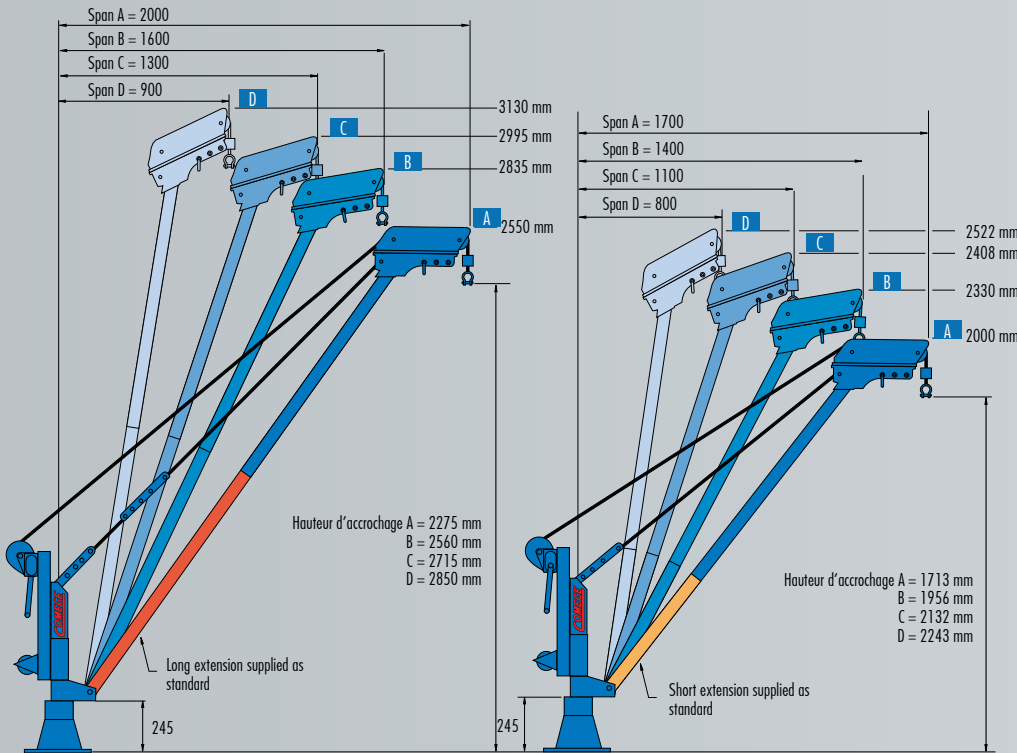


1 JIB CRANE = 2 POSSIBLE METHODS OF ASSEMBLY

1 jib crane with winch = 2 bags of less than 24Kg



CONTENTS OF BAG N°1

To minimize the risks due to carrying heavy loads, the components of the COMALU-300T are grouped into two bags robust. A single person can carry the jib crane, assemble on the socket and make the lift safely.



CONTENTS OF BAG N°2



MOUNTING ON THE SOCKET



ARM ASSEMBLY



FIXATION WITH PULLING THE PIN



CABLE ENTRY



MAKE LIFTING



ALU REMOVABLE JIB CRANE

COMALU 500

**Max. capacity
500 kg**

Span = 1,5 m

1 bag of 24 kg

Easy assembly

**1 unique
removable jib
crane for many
locations**

Removable lifting solution, efficient and safe the jib crane COMALU contributes to improving the responsiveness of your teams. Its aluminum frame guarantee you maximum portability and facilitates interventions on sites difficult to access. A single man can so proceed safely to the assembly of 3 elements which compose the jib crane COMALU.




STANDARD EQUIPMENT

CMU 300 Kg - Span 1,5 m max	Only 1 bag provided
Adjustable span from 800mm to 1500 mm	Fitting the pivot on ball bearings
2 heights available (2 extensions provided)	Powder coating on anodized
Jib crane in 3 parts / installation very fast	2 stainless shackles for hoist or accessory
Set weight = 24KG	


OPTIONS

Stainless steel load cable : length 1m
Jib crane extension
Galvanized lifting winch with stainless steel pulleys and cable
Winch for persons lifting with fall protection
Socket fixed to the floor, wall, or sealed

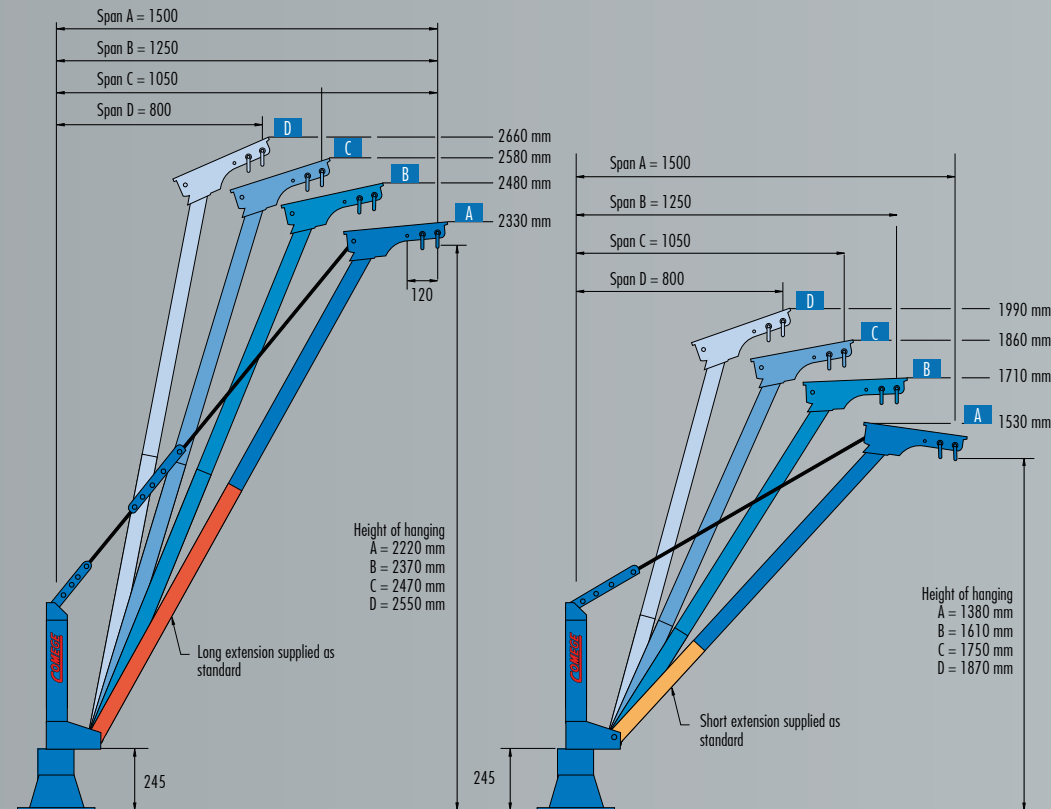

1 JIB CRANE = 2 POSSIBLE METHODS OF ASSEMBLY

Carry bag (included) gives your team the ideal tool for interventions on site quickly and efficiently. All the parts that make up the COMALU-300 is grouped into one sturdy bag. A single person can carry the jib crane, assemble, place on the base and make the lift safely.

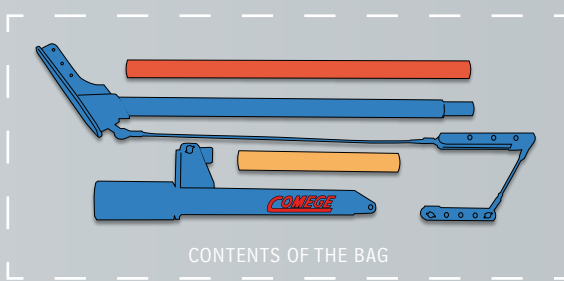

CONTENTS OF THE BAG

1 jib crane = 1 bag of 24 Kg



MOUNTING ON THE SOCKET


ASSEMBLY OF THE EXTENSION

ARM ASSEMBLY

FIXATION WITH PULLING THE PIN

IMPLEMENTATION OF THE HOIST

Get in standard 8 span-height couples. It is the ideal jib crane for lifting loads and people in treatment plant or by the sea, and generally anywhere a standard jib crane can not be used. Secure sockets and enjoy the lightness of a single removable jib crane for many configurations.

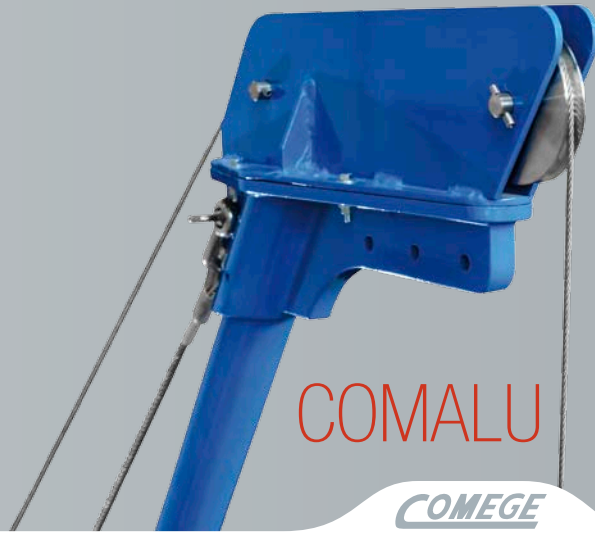

ALU REMOVABLE JIB CRANE WITH WINCH

COMALU

500 T

COMEGE

Max. capacity
500 kg

Span 1,5 m

2 bags

Easy assembly


A single removable jib crane with winch for many locations

STANDARD EQUIPMENT

CMU 500 Kg - Span 1,5 m max	2 carry bag provided
Adjustable span from 800mm to 1500 mm	Fitting the pivot on ball bearings
2 heights available (2 extensions provided)	Powder coating on anodized
Jib crane in 4 parts / installation very fast	2 stainless shackles for hoist or accessory
Set weight = 2 bags of less than 24Kg	1 stainless winch


OPTIONS

Stainless steel load cable : length 1m
Jib crane extension
Galvanized lifting winch with stainless steel pulleys and cable
Winch for persons lifting with fall protection
Socket fixed to the floor, wall, or sealed

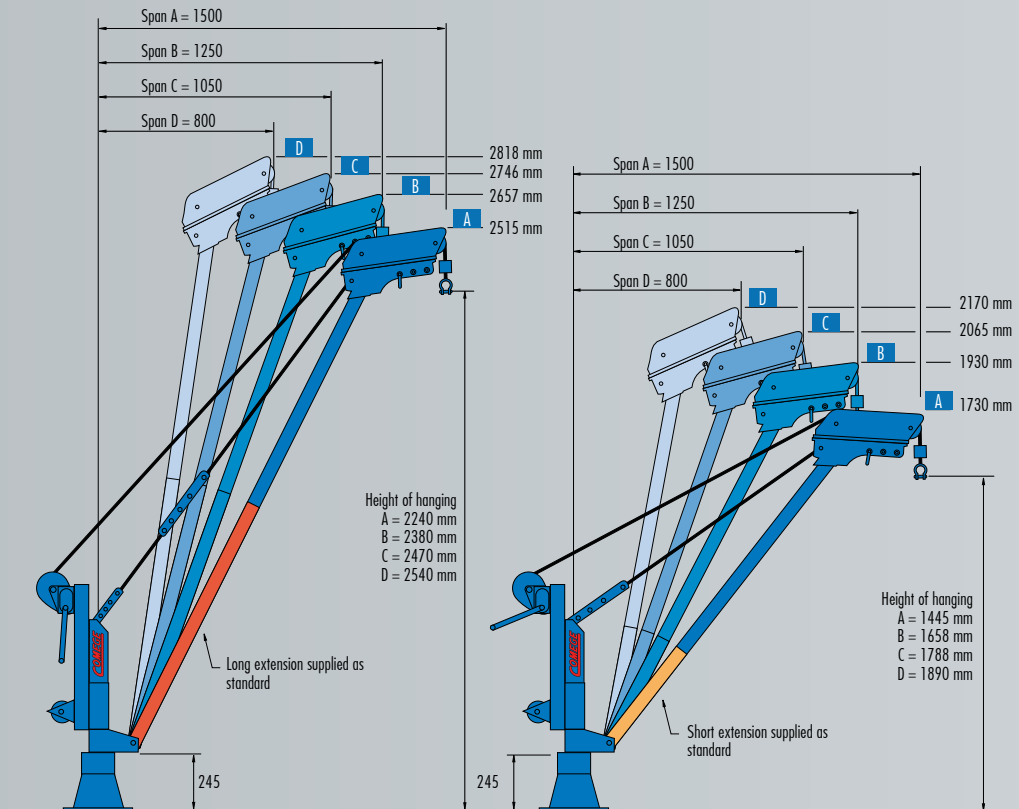


1 JIB CRANE = 2 POSSIBLE METHODS OF ASSEMBLY

1 jib crane with winch = 2 bags of less than 24Kg



CONTENTS OF BAG N°1

To minimize the risks due to carrying heavy loads, the components of the COMALU-300T are grouped into two bags robust. A single person can carry the jib crane, assemble on the socket and make the lift safely.



CONTENTS OF BAG N°2



MOUNTING ON THE SOCKET

ARM ASSEMBLY



FIXATION WITH PULLING THE PIN



CABLE ENTRY



MAKE LIFTING



ACCESSORIES


SOCKETS EXTENSIONS




To meet all your mounting configurations, we offer a range of accessories to facilitate the implementation of our aluminum jib crane on your sites. The use of several sockets for the same jib crane greatly enhances handling costs. The extension allows the guardrail crossing or increase the lift height.



Mounting example: low version LEVO 300 + extension

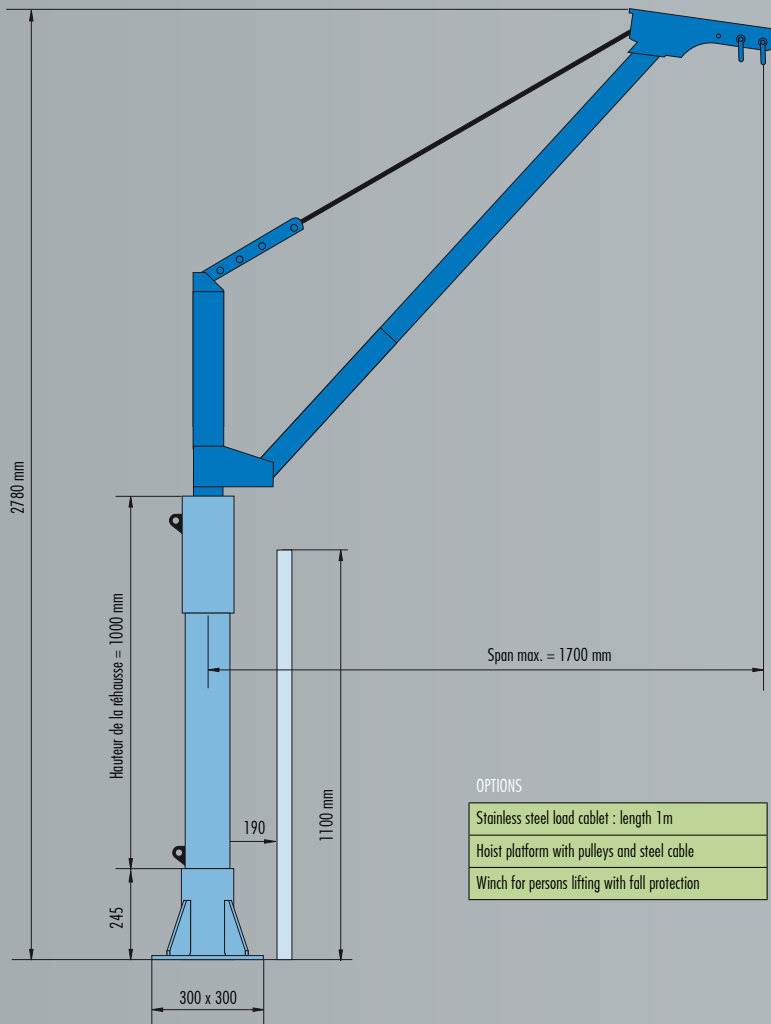

Sockets

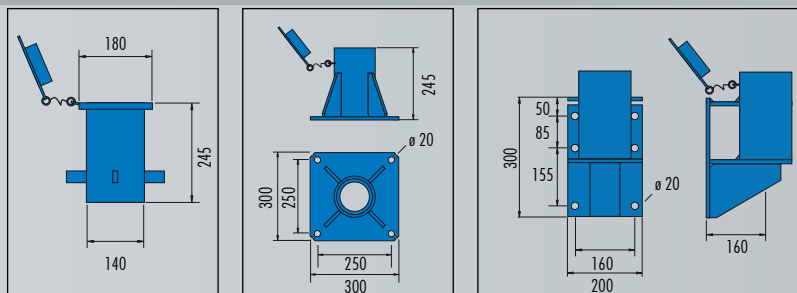

TO SEAL

ON THE FLOOR

WALLED

It is for the user to ensure the proper anchoring and quality of the support of the socket before any use of jib crane.