



**BRANCH OFFICE:
FACTORY UNIT-01**

Mughal Street, Opposite
Chota Sanda
Telephone Exchange
Bund Road, Ring Road
Lahore, Pakistan.

**CONTACT US:
HEAD OFFICE:**

502-5th Floor,
Al-Nafay Center Near
Sabzazar Cricket Stadium
Main Boulevard Sabzazar,
Lahore-Pakistan.

**BRANCH OFFICE:
FACTORY UNIT-02**

Sher Shah Industrial Zone
Phase II, Opposite,
Caltex Petrol Pump,
Nabi Pur, Qilla Sattar Shah
23-Km Sheikhpura, Pakistan.

www.km-mughal.com

[Facebook/km.mughal786](https://www.facebook.com/km.mughal786)

KM.Mughal



**MIRZA. A. MAJEED
C.E.O
0333-4297505
0300-8778807**

Manufacturer:

Concrete Machinery

Paver Tile Plant

Paver Tile Mold

www.km-mughal.com

[Facebook/km.mughal786](https://www.facebook.com/km.mughal786)




**CONCRETE PAVER TILE PLANT-MODEL TP2
PRODUCT SPECIFICATIONS**

- Paver Making Machine
- Rectangle Mould (15 Paver Tile With 60 mm Thickness)
- Hydraulic Unit with motor pump & oil cooler
- Mixer machine with motor gear
- Concrete Conveyor belt with motor gear & hopper
- Pilot chain conveyor with motor gear
- Electrical panel
- Channel leg conveyor support
- Foundation belt
- Drive System: Spool Hydraulic Directional Control Valve Lever-operated
- Total motor gear Capacity: 51 HP (38KW)
- Note: The minimum typical electric range on generator is 150KW & Transformer 50KW

PRODUCTON DETAILS - MODEL TP2

DESCRIPTION	Per Cycle Production	Per Day Production
Rectangle Size (15 Paver Tile Model)	15 Paver Tile (21 to 30 Seconds)	1000 Paver Tile 8 Hours
Total Block Shape 4'3"X'3" @ 60mm Mould	4 Blocks 40 to 45 Seconds	200 Blocks 8 Hours
Total Block Shape 4'3"X'3" @ 60mm Mould	4 Blocks 40 to 45 Seconds	200 Blocks 8 Hours

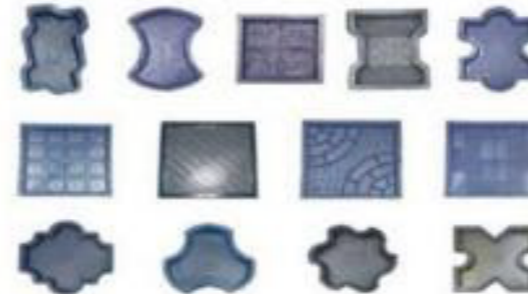

We Provide the quality approved a range of interlocking Block Vibrating Table to our valuable clients. Specifications: Movement of rubber Mold in vibration. Due to vibration with manual intervention. Vibration Table size: 2.5x10 Feet Height of the tile: 100 x 100 mm Brand/Make KM Paver Machinery
Total Weight: 480kg/Piece

Additional Information:

Item Code: KM Paver Vibrator

Production Capacity: 3000-3500

Delivery Time: Always ready to dispatch/




**CONCRETE PAVER TILE PLANT-MODEL TP2
PRODUCT SPECIFICATIONS**

- Paver Making Machine
- Rectangle Mould (15 Paver Tile With 60 mm Thickness)
- Hydraulic Unit with motor pump & oil cooler
- Mixer machine with motor gear
- Concrete Conveyor belt with motor gear & hopper
- Pilot chain conveyor with motor gear
- Electrical panel
- Channel leg conveyor support
- Foundation belt
- Drive System: Spool Hydraulic Directional Control Valve Lever-operated
- Total motor gear Capacity: 51 HP (38KW)
- Note: The minimum typical electric range on generator is 150KW & Transformer 50KW

PRODUCTON DETAILS - MODEL TP2

DESCRIPTION	Per Cycle Production	Per Day Production
Rectangle Size (15 Paver Tile Mould)	15 Paver Tile (21 to 30 Seconds)	1000 Paver Tile 8 Hours
Total Block Shape 4'3"X2' at 60mm Mould	4 Blocks 40 to 45 Seconds	200 Blocks 8 Hours
Total Block Shape 4'3"X2' at 60mm Mould	4 Blocks 40 to 45 Seconds	200 Blocks 8 Hours

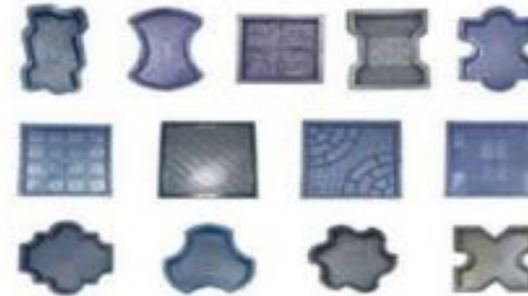

We Provide the quality approved a range of interlocking Block Vibrating Table to our valuable clients. Specifications: Movement of rubber Mold in vibration. Due to vibration with manual intervention. Vibration Table size: 2.5x10 Feet Height of the tile: 100 x 100 mm Brand/Make KM Paver Machinery
Total Weight: 480kg/Piece

Additional Information:

Item Code: KM Paver Vibrator

Production Capacity: 3000-3500

Delivery Time: Always ready to dispatch/



**CONCRETE PAVER TILE PLANT-MODEL TP3
PRODUCT SPECIFICATIONS**

- Paver Making Machine
- Rectangle Mould (15 Paver Tile With 60 mm Thickness)
- Hydraulic Unit with motor pump & oil cooler
- Concrete Mixer machine with motor gear
- Colour Mixer machine with motor gear
- Concrete Conveyor belt with motor gear & hopper
- Colour Conveyor belt with motor gear & hopper
- Pilot chain conveyor with motor gear
- Electrical panel
- Channel leg conveyor support
- Foundation belt
- Drive System: Spool Hydraulic Directional Control Valve Lever-operated
- Total motor gear Capacity: 66 HP (49.22KW)
- Note: The minimum typical electric range on generator is 150KW & Transformer 50KW

PRODUCTON DETAILS - MODEL TP3

DESCRIPTION	Per Cycle Production	Per Day Production
Rectangle Vloger (15 Paver Tile Model)	15 Paver Tile (21 to 12 Seconds)	2400 Paver Tile (8 Hours)
Square Block (100x100x20) (4 Block Model)	4 Block (10 to 42 Seconds)	2500 Block (8 Hours)
Square Block (150x150x20) (4 Block Model)	4 Block (10 to 42 Seconds)	2500 Block (8 Hours)



Hand Lifter



Imported Nut Bolt



Gear Box All Size Available



Pulley



Trolley Wheel



Electric Mono Lever




Corbin Weir Brush
Plastic Weir Brush



Corbin Weir Brush



Vibration Belt
Mixer Belt

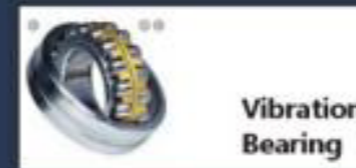


Vibration Bearing



Vibration Rubber Mounting



Electric Panel Repairing & New Manufacture

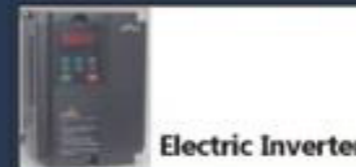

Electric Inverter



Electric Magnetic Contractor



Electric Breaker




Gear Motor



Electric Vibration Motor



Electric Motor

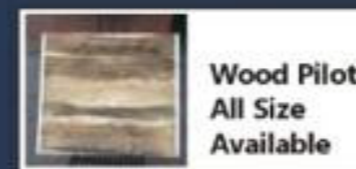

Wood Pilot All Size Available



Chain Gear



Chain



**CONCRETE PAVER TILE PLANT-MODEL TP4
PRODUCT SPECIFICATIONS**

- Paver Making Machine
- Rectangle Mould (24 Paver Tile With 60 mm Thickness)
- Hydraulic Unit with solenoid motor pump & oil cooler
- Concrete Mixer machine with motor gear (Double Load)
- Colour Mixer machine with motor gear
- Concrete Conveyor belt with motor gear & hopper
- Colour Conveyor belt with motor gear & hopper
- Pilot chain conveyor with motor gear
- Electrical panel
- Channel leg conveyor support
- Foundation belt
- Plant Hopper
- Drive System: Spool Hydraulic Directional Control Valve Lever-operated
- Total motor gear Capacity: 112 HP (84KW)
- Note: The minimum typical electric range on generator is 200KW & Transformer 100KW

PRODUCTON DETAILS - MODEL TP4

DESCRIPTION	Per Cycle Production	Per Day Production
Rectangle (Type 24 Paver Tile Mould)	12 Paver Tile (24 x 60 seconds)	2000 Paver Tile (8 Hours)
Joint Interlock (Type 12 Paver Tile Mould)	4 Paver Tile (12 x 60 seconds)	400 Paver Tile (8 Hours)
Hexagon (Type 12 Paver Tile Mould)	4 Paver Tile (12 x 60 seconds)	400 Paver Tile (8 Hours)

Mould Name	Shape	Size			
Rectangle		50mm 60mm 80mm 4.5 Squire Feet	Key Paver		50mm 60mm 80mm
I Section		50mm 60mm 80mm 3.18 Squire Feet	Paver Cube		60mm 9 Pc in Squire Feet
Uni Block		50mm 60mm 80mm 3.70 Squire Feet	Paver Cube		60mm 4 Pc in Squire Feet
Karb Satone		12"X12"X6 12"X14"X6 12"X18"X6	Rectangle Tow Scale		50mm 60mm 80mm 4.5 Pc in Squire Feet
Solid Block		4"X8"X12 6"X8"X12 8"X8"X12	Paver Roof		6"X12"X2"
Hollow Block		4"X8"X16 6"X8"X16 8"X8"X16	Concrete Brick		9"X4.5"X3"
Hexagon		50mm 60mm 80mm	Grass Paver		60mm
Joint-interlock		50mm 60mm 80mm	Fan Paver		50mm 60mm 80mm



All Type Mould Manufacture

- Germany Plant
- China Plant
- France Plant
- Turkey Plant
- Pakistan Plant
- Ms & high Carbon



**CONCRETE PAVER TILE PLANT-MODEL P5
PRODUCT SPECIFICATIONS**

- Paver Making Machine
- Rectangle Mould (35 Paver Tile With 60 mm Thickness)
- Hydraulic Unit with solenoid motor pump & oil cooler
- Concrete Mixer machine with motor gear (Double Load)
- Colour Mixer machine with motor gear
- Concrete Conveyor belt with motor gear & hopper
- Colour Conveyor belt with motor gear & hopper
- Pilot chain conveyor with motor gear
- Electrical panel
- Channel leg conveyor support
- Foundation belt
- Plant Hopper
- Drive System: Spool Hydraulic Directional Control Valve Lever-operated
- Total motor gear Capacity: 131 HP (99KW)
- Note: The minimum typical electric range on generator is 250KW & Transformer 100KW

PRODUCTON DETAILS - MODEL TPS

DESCRIPTION	Per Cycle Production	Per Day Production
Rectangle Mould (35 Paver Tile Mould)	20 Paver Tile (30 sec/10 seconds)	1,000 Paver Tile (8 hours)
Color Mould (35 Paver Tile Mould)	20 Paver Tile (30 sec/10 seconds)	1,000 Paver Tile (8 hours)
Color Mould (35 Paver Tile Mould)	20 Paver Tile (30 sec/10 seconds)	1,000 Paver Tile (8 hours)