

OVERVIEW

- » Low Voltage Thin Profile Head and Base
- » Single LED array provides shadow-less illumination
- » Intuitive dimmer has excellent responsive time with continuous dimming to 5%
- » 360 degree swivel between arm and mounting base, along with high-end hinge design enable full ergonomic user experience. No hinge adjustment needed.
- » Integral infrared proximity sensor option available
- » Available in Grey, White, Black, and Custom Finish
- » Single or Double Arm Configuration Available

ORDERING GUIDE

MODEL	ARM CONFIGURATION	MOUNTING OPTIONS	FINISH	OPTIONAL
Halo	Single (1) Single (2)	Desk Base (DB) Panel Mount(PM) Clamp Mount (CM)	White (W) Silver (S) Black (B) Custom (C)	Occupancy Sensor (OS) Industrial (Ind)

*Halo.1.DB.W.OS=Halo. Single Arm. Desk Base. White with Occupancy Sensor



HALO




LED SPECIFICATIONS

Lumens	500 (Office), 1000 (Industrial)
Efficacy	90 lm/watt
Wattage	5.5 watts max
CRI	92
Color Temp	3500K (Office, additional CTI available); 5000K (Industrial)
Options	Occupancy Sensor


L70(10K) Listing Compliance	>65,000 hrs UL153 standard, CA CEC listed ROHS compliant, CA Title 24 compliant
Warranty LEED v4	5 years Interior Lighting



DIMENSIONS

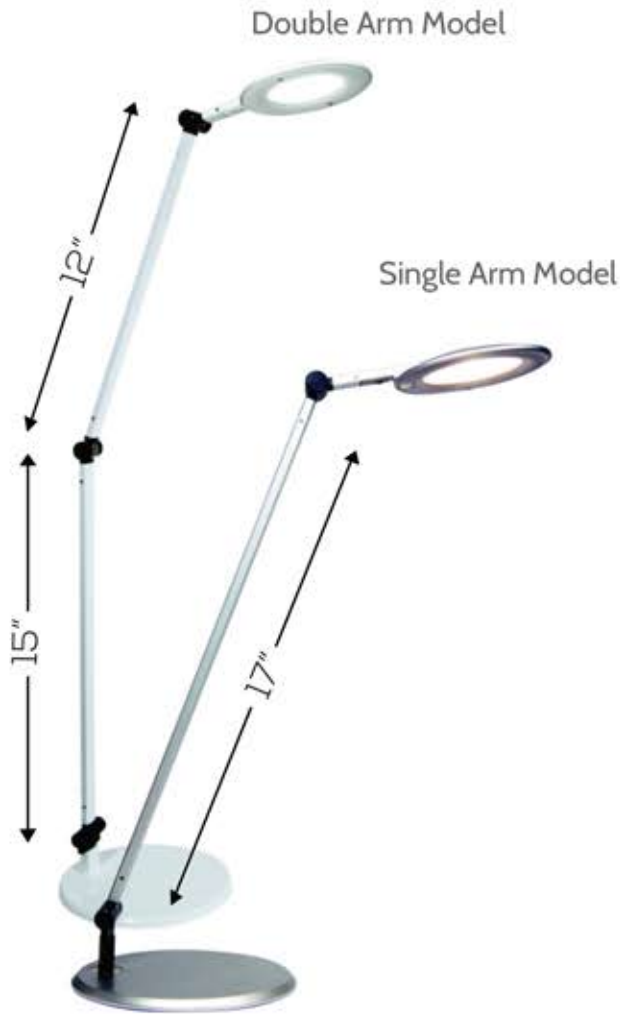

PHOTOMETRIC REPORT

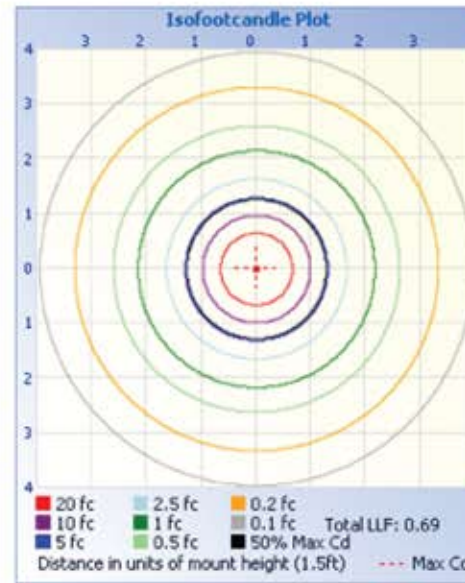

Illuminance at a Distance

Distance (ft)	Center Beam fc	Beam Width (ft)
0.33ft	1,346 fc	0.84 ft
0.67ft	327 fc	1.71 ft
1.00ft	147 fc	2.54 ft
1.33ft	82.9 fc	3.38 ft
1.67ft	52.6 fc	4.25 ft
2.00ft	36.7 fc	5.09 ft

■ Beam Spread: 103.7°

