

HERO

Equipped with the state-of-the-art technology, Hero Task Light integrates the best functionality and features, with the ease of installation.

Available in six lengths, in either standard or high lumen output and with power and network interconnect capabilities, Hero enables multiple configurations for custom lighting solutions for any space.

Engineered to have best ergonomic feature and comforting light output, its slim button with on/off and dimming feature provide superb response on control.

Its networking capability enables user and facility owner control on energy saving, feature control through dedicated app, furthering unique ability to adapt to space usage.

Hero's expansive feature from circadian rhythm, custom mesh network and its occupancy or vacancy sensor presents new horizon for task lighting delivery.



HERO



- » Integrated Power Supply without external wall adapter
- » Features integral dimmer on-off switch.
- » Color balance from warm to cool white available, on blackbody curve. Circadian Rhythm Optional.
- » Low Profile (0.6"H) for small niche or pocket areas.
- » Integral infrared proximity sensor option available (title 24 compliant)
- » Integral programmable work day timer option available.
- » Daisy chain configuration options with integral individual on/off and dimming available, up to 25 fixtures.
- » Bluetooth connectivity with app control.
- » Energy Harvesting switch Available together with bluetooth to create wireless on/off signal with no battery or cable connection

LED SPECIFICATIONS

Color Temp	3000K, 3500K, 4000K standard Color Balance. 2700K, 3500K, 5000K Far Red (720nm) UV-C (270nm)
CRI	94
L70(10k)	>60,000 hrs
Mounting	Mounts to wood, sheetrock or metal surfaces
Daisy Chain/ Interconnect	Optional daisy chain link for easy connectability (25 max)
Proximity Sensor	4 Meter human detection distance
Power Options	Retractable power cord available as addon

Power Supply Listing	Integrated UL listed to UL1598 & UL8750 standards
Compliance	ROHS complaint, CA Title 24 Complaint
Rating	90-130 Vac, 50-60 Hz
Warranty	10 years warranty
LEED V4	Interior Control Lighting Control 1 Point Lighting Quality 1 Point
Dimension	Height 0.6"x Width 2" x Length (12.25", 21.35", 30.45", 39.55", 48.65")

*Contact your sales rep for more information.



ORDERING FORM


MODEL	FIXTURE LENGTH	LUMENS	FINISH	OPTIONAL OCCUPANCY SENSOR	OPTIONAL COLOR MIX	FURTHER OPTIONS
HERO	12" (12), 17" (17), 22" (22), 27" (27), 31" (31), 36" (36), 40" (40), 45" (45), 49" (49), 54" (54), 58" (58), 63" (63), 67" (67), 72" (72), 76" (76)	Standard Output (R1) High Output (R2)	Silver (S) Black (B) White (W)	Occupancy Sensor (OS)	Color Mix (CM) Circadian Rythm(CR)	- BLE - Daisy Chain Single control(DCSC) - Far Red - UV-C

DRAWING


HERO.12	[12,22"] 310,3mm
HERO.17	[16,72"] 424,6mm
HERO.22	[21,22"] 538,9mm
HERO.27	[25,72"] 653,2mm
HERO.31	[30,22"] 767,5mm
HERO.36	[34,72"] 881,8mm
HERO.40	[39,22"] 996,1mm
HERO.45	[43,72"] 1110,4mm
HERO.49	[48,22"] 1224,7mm
HERO.54	[52,72"] 1339,0mm
HERO.58	[57,22"] 1453,3mm
HERO.63	[61,72"] 1567,6mm

*with BLE module, add 1.25"

POLAR GRAPH

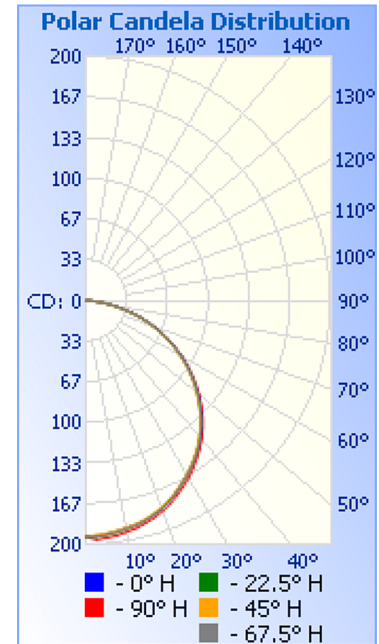

PHOTOMETRIC REPORT

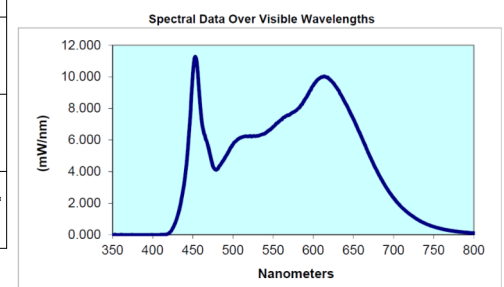

FIXTURE DATA

	Efficacy* Lm/Wt	CRI	Ft/candle	Wt/Unit	Max Units per run
HERO.12	66	94	80	Single: 4.5W	Single: 25
HERO.22	66	94	80	Single: 8W	Single: 25
HERO.31	66	94	80	Single: 10W	Single: 25
HERO.40	66	94	80	Single: 12W	Single: 25
HERO.49	66	94	80	Single: 14W	Single: 25
HERO.58	66	94	80	Single: 14W	Single: 25

*Meets Title 24 High efficacy rating.

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
0.33ft	1,772 fc	1.00 ft	1.04 ft
0.67ft	430 fc	2.03 ft	2.10 ft
1.00ft	193 fc	3.03 ft	3.14 ft
1.33ft	109 fc	4.02 ft	4.18 ft
1.67ft	69.2 fc	5.05 ft	5.25 ft
2.00ft	48.3 fc	6.05 ft	6.28 ft

■ Vert. Spread: 113.1°
■ Horiz. Spread: 115.0°

