

## JANIS 2

The Janis 2 Series morphes a modern and clean look becoming the essential piece of power module at your desk or bench. With the top metal bracket removed, the full beauty of the design comes to life, allowing you to incorporate the Janis 2 into your space as a dramatic focal point without sacrificing charging capabilities. Janis 2 provides users with multiple points of power access by offering AC receptacles alongside latest dual USB charging ports.



# JANIS 2



- » The Janis 2 is available with in surface and under mounting options.
- » The top metal bracket and plastic face are available in White, Gray and Black.
- » The face also comes in custom colors that can perfectly accent the design and layout of your space.
- » The Janis 2 is offered in a Clamp-on or Under mounting option and is UL 962A and UL 111 listed.



## SPECIFICATIONS

|              |  |
|--------------|--|
| Power Outlet | 2- 15A, 120V AC Power Outlets                                    |
| USB Outlet   | 1- 2.1A/10.5W USB Charging Port<br>1- 3A/15W USB-C Charging Port |
| Cord Length  | >6' or 10' Cord or Hardwire Option                               |
| Mounting     | Clamp Mount, Under Standard Mount                                |

|              |   |
|--------------|---|
| Listing      | UL listed to UL153 & UL8750 standards   |
| Compliance   | Meets UL Spill Requirements Class 2, FCC Part 15 A Approved<br>Meets USB.org Battery Charging 1.2 Specifications        |
| Input Rating | 90-130 Vac, 50-60 Hz  |
| Warranty     | 10 years warranty   |
| Dimension    | Janis 2 Clamp-on Standard Dimensions: 5.06" x 3.01" x 1.69"<br>Janis 2 Under Standard Dimensions: 5.55" x 3.85" x 1.91" |


\*Contact your sales rep for more information.



## ORDERING FORM

| MODEL   | CORD LENGTH        | FINISH                               |
|---------|--------------------|--------------------------------------|
| JANIS 2 | 6 (6')<br>10 (10') | Silver (S)<br>Black (B)<br>White (W) |

## DRAWING

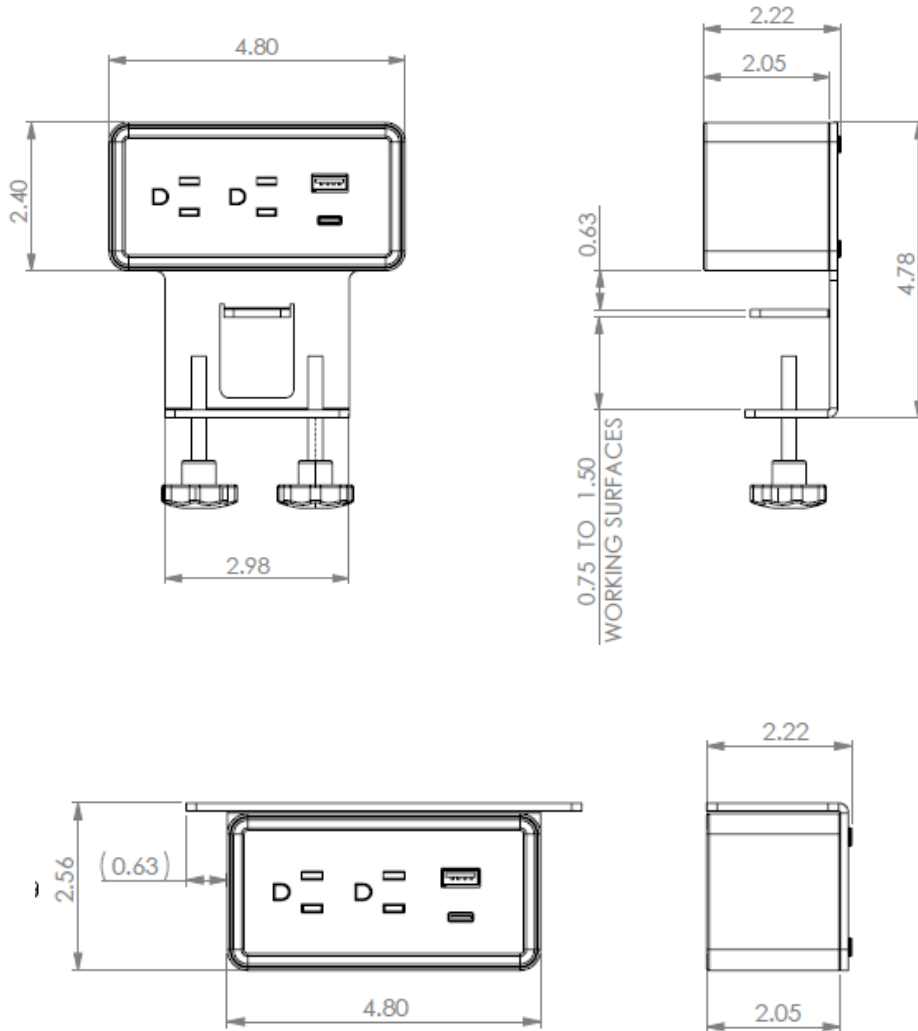

\*Meets Title 24 High efficacy rating.

