


LUNGO

Part No. #24258

- » Low Voltage Lite Profile (0.75"H) for small niche or pocket areas.
- » Integral infrared proximity sensor option available
- » Work day timer, initial lumen output level, and occupancy sensor customizations* optional.
- » Simple plug-in daisy chain configuration. No configuration required. Optional 18" cable.
- » Features both an On/Off and Dimmer switches.
- » All models available in Double Pack™ with twice lumen output
- » Tight binning ensure color consistency over light fixtures. Light color consistency with chromaticity within 2 steps.
- » Supports screw or magnetic mounting.
- » Bluetooth connectivity
- » Bluetooth music streaming

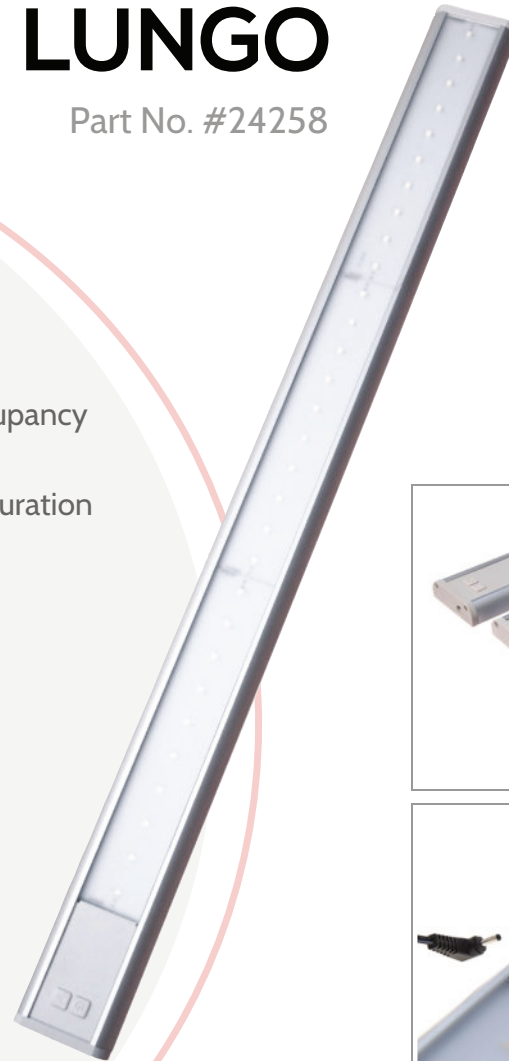

LED SPECIFICATIONS

Color Temp	Warm White 3500K
CRI	90
L70(10k)	>60,000 hrs
Mounting	Mounts to wood, sheetrock or metal surfaces
Daisy Chain	Optional daisy chain link for easy connectability
Proximity Sensor	4 Meter human detection distance
Interconnect	Plug and play daisy chain connection.
Coverage	4ft at 18" surface
Power Options	Retractable power cord available as addon

Power Supply	Input: 90-240Vac, Type VI Energy Star rated 24V, 1A Input up to 277Vac available
Listing	UL listed to UL1598, UL2108 & UL8750 standards
Compliance	ROHS complaint, CA Title 24 Complaint
Rating	Energy Star Rated - Type VI 24V, 1A, PF > 0.9, THD < 20%
Warranty	5 years warranty
LEED V4	Interior Control Lighting Control 1 Point Lighting Quality 1 Point
Dimension	2.25"Wx0.75"H


*Contact your sales rep for more information.



ORDERING FORM

Qty	Product	Price	Total
	LL.12.EX.R1.S		
	LL.22.EX.R1.S		
	LL.31.EX.R1.S		
	LL.40.EX.R1.S		
	Daisy Chain Cable		
	Occupancy Sensor		


DRAWING

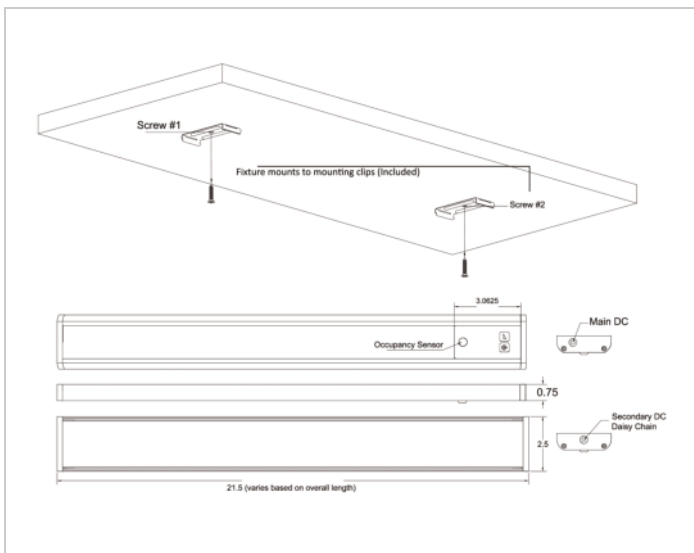


FIXTURE DATA

	Efficacy* Lm/Wt	CRI	Lm/Unit	Wt/Unit	Max Units per run
LL.12	60.33	90	Single: 181 Double :362	Single: 3W Double: 6W	Single: 8 Double: 4
LL.22	60.33	90	Single: 362 Double :724	Single: 6W Double: 12W	Single: 4 Double: 2
LL.31	60.33	90	Single: 543 Double: 1086	Single: 9W Double: 18W	Single: 3 Double: 1
LL.40	60.33	90	Single: 724 Double :1448	Single: 12W Double: 24W	Single: 2 Double: 1


*Meets Title 24 High efficacy rating.

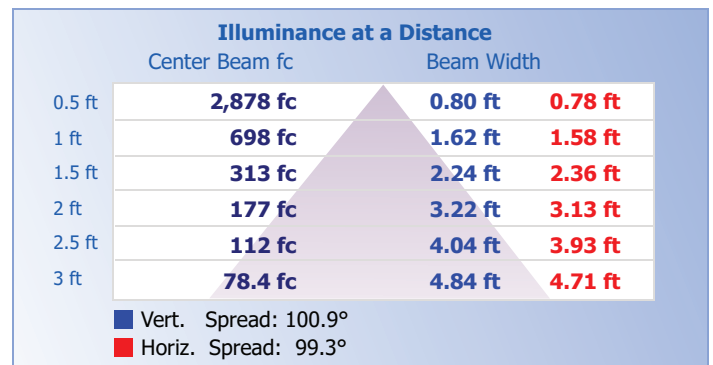

PHOTOMETRIC REPORT

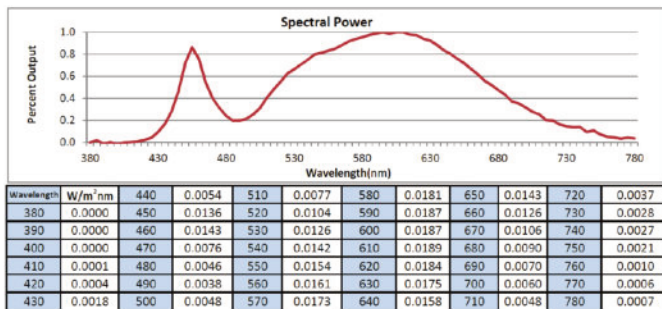

POLAR GRAPH



Mainstem Candela = 79.58 Located At Horizontal Angle = 0, Vertical Angle = 0
#1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd)
#2 - Horizontal Plane Through Vertical Angle (0) (Through Max. Cd)

CIE 1931 CHROMATICITY DIAGRAM

