


MAI<sup>®</sup> 2MIXMAIA

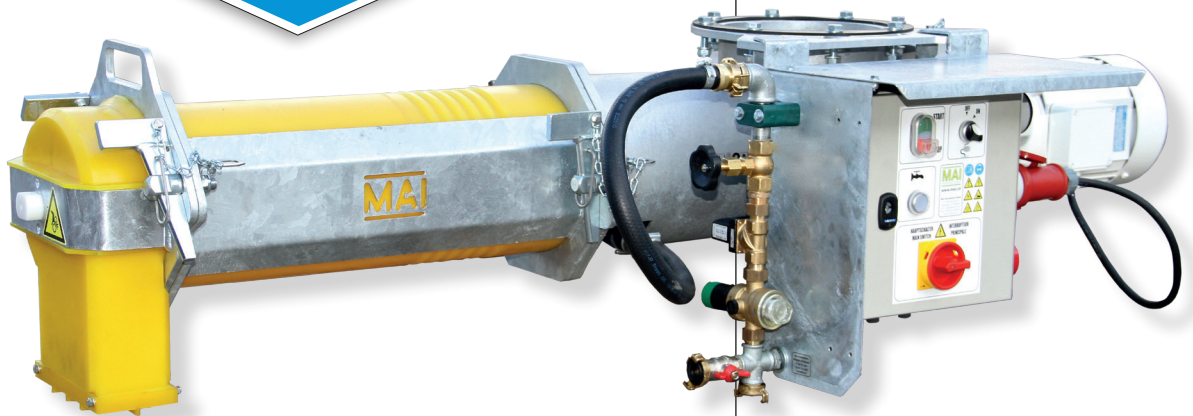

MAN ASSISTING INNOVATIONS

ALWAYS ONE IDEA BETTER

## MAI<sup>®</sup> 2MIXMAIA

### AS YOU KNOW; TIME IS MONEY

Reduce your maintenance and service costs thanks to the quick and easy dismantling of the main components. Benefit from our continuous mixer's long service life, made possible by the use of high-quality steel parts and the most modern plastic components available. The robust construction can withstand even tough continuous operation.

### EASY CLEANING

The MAI<sup>®</sup>CODUR mixing zone with self-cleaning function will save you costs and bring you unbeatable benefits for mixer operation. Save time and effort thanks to the easy replacement of the mixing tube.

### FROM MASONRY MORTAR TO LEVELLING MORTAR

Expand your flexibility and range. (Masonry mortar, plaster mortar, flooring mortar, tiling mortar, adhesive mortar, gap filling mortar, reinforcing mortar, scraped renderings, renovation plaster, light plaster, floating and set, cement plaster, insulation plaster, setting coat, levelling mortar, etc.)

### MAKE YOUR OWN MAIA

You determine:

- Control
- Flow rate
- Water system
- Colour.

### TECHNICAL DATA

Operating voltage:	400V/3/PE/50Hz
Nominal power:	3,0 kW; 4,0 kW; 5,5 kW
Fusing:	16 A
Feed capacity:	10 to 65 l/min
Silo connection:	Ø 250 mm
L x W x H:	190 x 73 x 67 cm
Total weight:	165 kg



MAI<sup>®</sup> International GmbH, Werkstraße 17, 9710 Feistritz/Drau  
P.O.Box 8, Austria, Europe, E-mail: mai@mai.at, Internet: www.mai.at  
Tel. +43 (0) 4245/6233-0, Fax +43 (0) 4245/6233-10

MAI<sup>®</sup> and MAI-PUMP<sup>®</sup> are registered trademarks of MAI<sup>®</sup> International GmbH.  
MAI<sup>®</sup> International GmbH reserves the right to alter its machine specifications and descriptions  
at any time without prior notice. © MAI<sup>®</sup> International GmbH, 2013, EN01

**MAI**  
INTERNATIONAL<sup>®</sup>