



MT 10

Cylindrical design

Through bolts free

Blank firing protection

Autolube system

Underwater work

Minimum maintenance


Longer product lifetime

Model		MT 10
Operating weight	kg	950
Excavator	tn	13-16
Operating flow	l/min	85-110
Operating pressure	bar	150-170
Blow frequency	bpm	500-665
Diameter of tool	mm	105
Tool height	mm	1.000
Total height	mm	1.860
Blank firing protection System		S
Autolube system		S
Underwater work		S

TABE has a unique testing laboratory that tests and guarantees the quality, performance and resistance of all its products before going on the market.



1. Through bolts free.
2. Solid housing with high density isolation.
3. Energy Recovery, Hybrid technology.
4. Underwater working system.
5. Auto lube system.
6. Two moving parts only.
7. Double tool retainer.
8. Reinforced housing with wear-resistant material.
9. Wide range of tools for different applications.

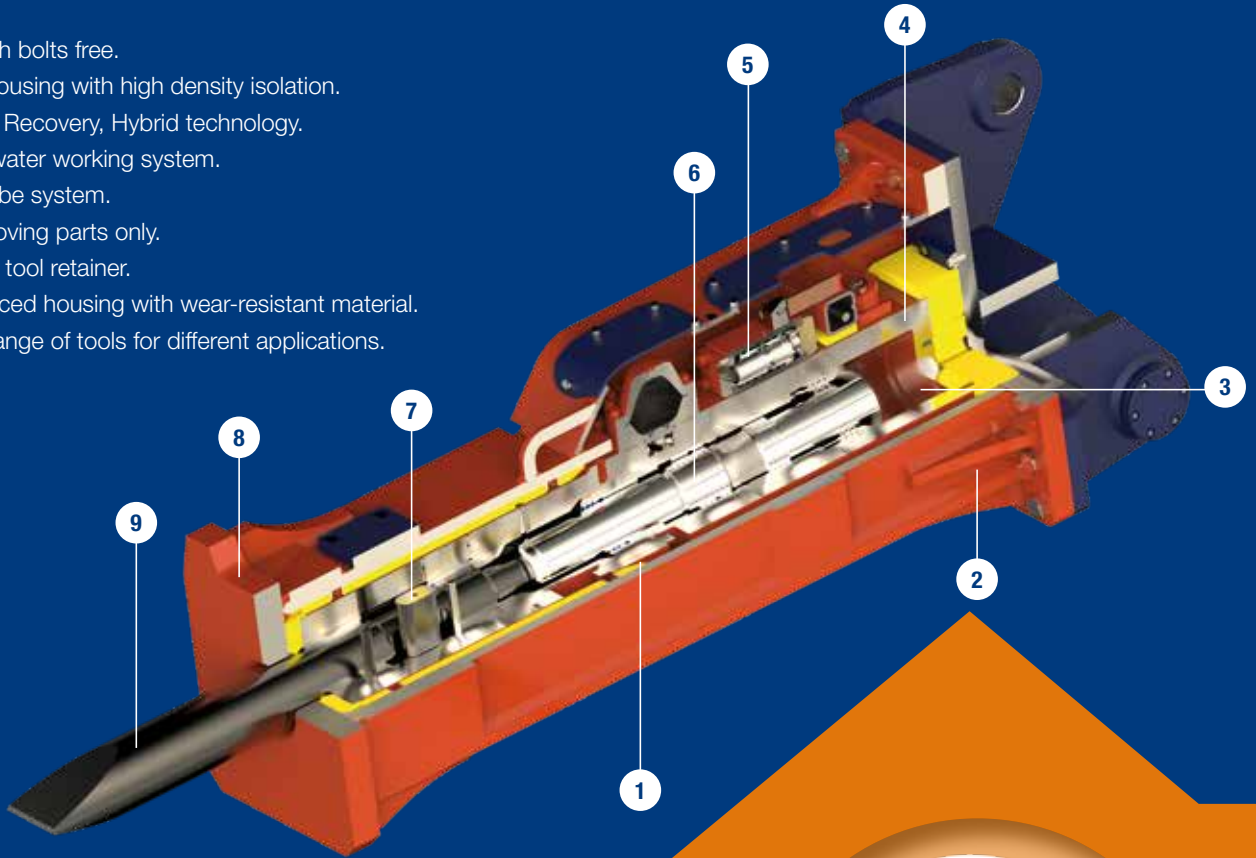

Solutions for each application

MOIL TOOL



CHISEL TOOL




POINT TOOL



BLUNT TOOL



WIDE CHISEL
TOOL



ELEPHANT
TOOL



POST HOLE
DRIVER



RAMMING
TOOL



BETASYSTEM



DUST PROTECTION
RING



Bekolarra 8,
01010 Vitoria-Gasteiz (España)
+34 945 24 72 50
+34 945 22 41 77
tabe@tabe-hammers.com

www.tabe-hammers.com