



# MT 40

Through bolts free

Blank firing protection

Autolube system

Underwater work

Minimum maintenance


Longer product lifetime

Model	MT 40	
Operating weight	kg	4850
Excavator	tn	42-65
Operating flow	l/min	250-340
Operating pressure	bar	160-180
Blow frequency	bpm	290-557
Diameter of tool	mm	180
Tool height	mm	1.625
Total height	mm	3.000
Blank firing protection System	S	
Autolube system	S	
Underwater work	S	
Frequency variation	S	

TABE has a unique testing laboratory that tests and guarantees the quality, performance and resistance of all its products before going on the market.



1. Through bolts free.
2. Solid housing with high density isolation.
3. Energy Recovery, Hybrid technology.
4. Underwater working system.
5. Auto lube system.
6. Two moving parts only.
7. Double tool retainer.
8. Reinforced housing with wear-resistant material.
9. Wide range of tools for different applications.

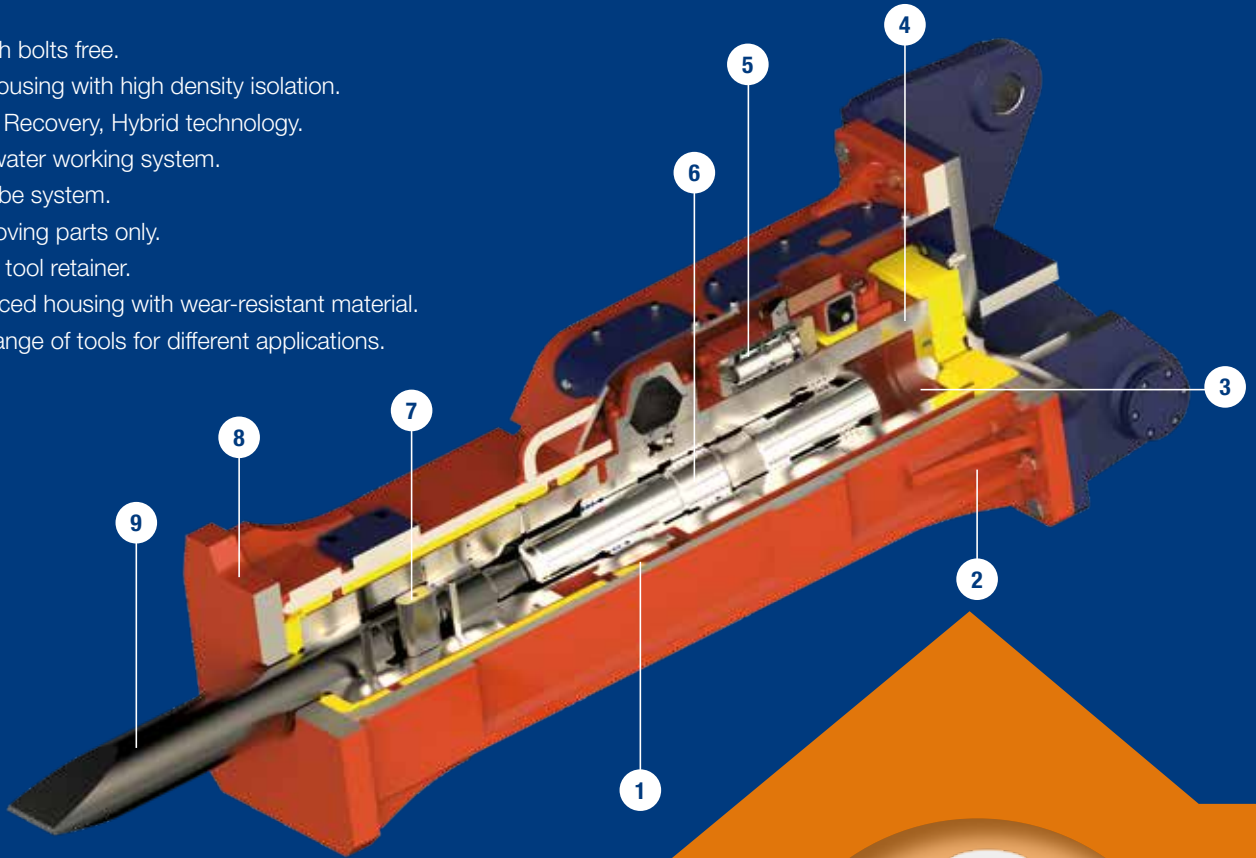

# Solutions for each application



MOIL TOOL



CHISEL TOOL



POINT TOOL



BLUNT TOOL



Bekolarra 8,  
01010 Vitoria-Gasteiz (España)  
+34 945 24 72 50  
+34 945 22 41 77  
tabe@tabe-hammers.com

[www.tabe-hammers.com](http://www.tabe-hammers.com)