



MT 575

Cylindrical design

Monoblock structure

Through bolts free

Blank firing protection

Autolube system

Minimum maintenance

Longer product lifetime


Model	MT 575	
Operating weight	kg	600
Excavator	tn	9-12
Operating flow	l/min	90-120
Operating pressure	bar	120-135
Blow frequency	bpm	750-950
Diameter of tool	mm	90
Tool height	mm	900
Total height	mm	1.670
Blank firing protection System		S

TABE has a unique testing laboratory that tests and guarantees the quality, performance and resistance of all its products before going on the market.

TABE


We build solutions

1. Through bolts free.
2. Cylindrical design with high hardness casting body.
3. Energy recovery, hybrid technology.
4. Optional: underwater working system.
5. Greasing system.
6. Only two parts in movement.
7. Wide range of tools for different applications.

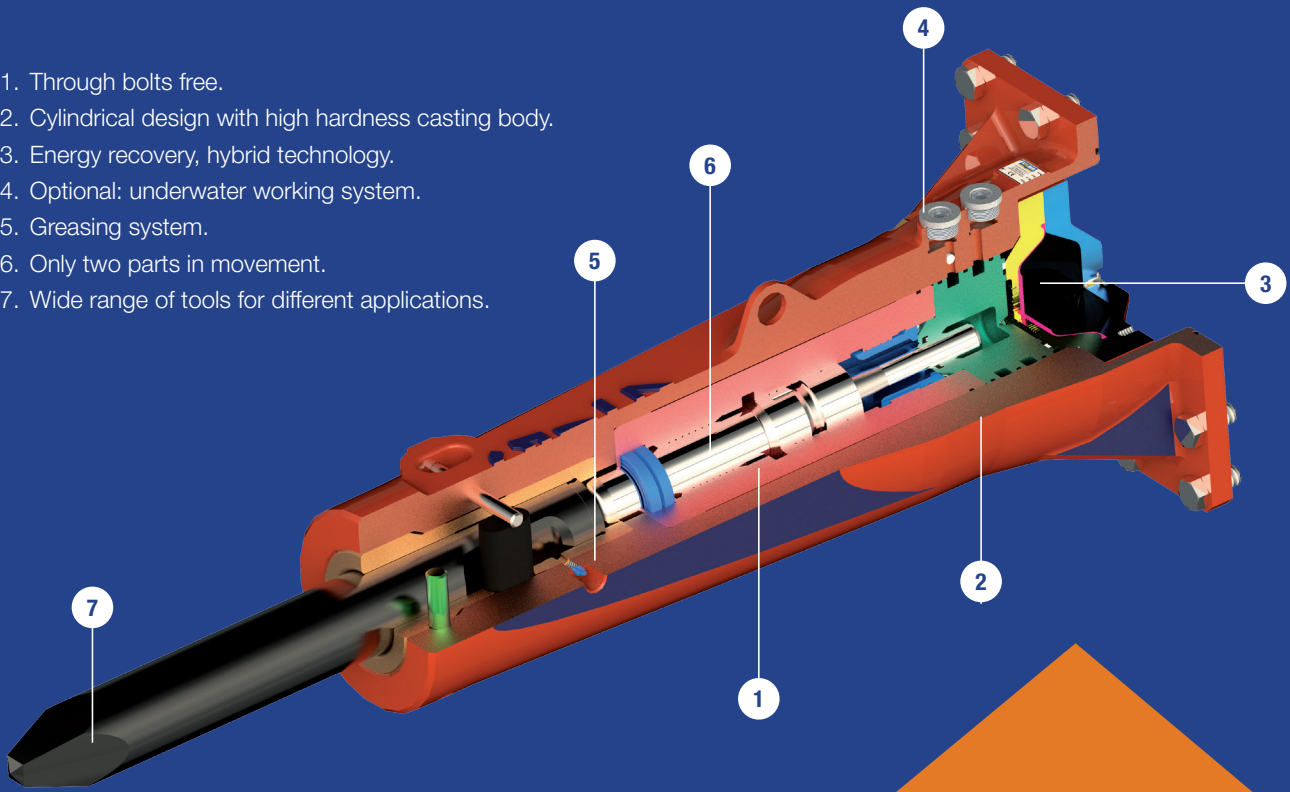

Solutions for each application


MOIL TOOL



CHISEL TOOL




POINT TOOL



BLUNT TOOL



**WIDE CHISEL
TOOL**



**ELEPHANT
TOOL**




**POST HOLE
DRIVER**



**RAMMING
TOOL**



BETASYSTEM



**DUST PROTECTION
RING**



Bekolarra 8,
01010 Vitoria-Gasteiz (España)
+34 945 24 72 50
+34 945 22 41 77
tabe@tabe-hammers.com

www.tabe-hammers.com