



# MT 65

Cylindrical design

Monoblock structure

Through bolts free

Blank firing protection

Minimum maintenance

Longer product lifetime


Model	MT 65	
Operating weight	kg	67
Excavator	tn	0.7-2
Operating flow	l/min	15-25
Operating pressure	bar	100-140
Blow frequency	bpm	800-1.200
Diameter of tool	mm	37
Tool height	mm	435
Total height	mm	846
Blank firing protection System	S	

TABE has a unique testing laboratory that tests and guarantees the quality, performance and resistance of all its products before going on the market.




*We build solutions*

1. Through bolts free.
2. Cylindrical design with high hardness casting body.
3. Energy recovery, hybrid technology.
4. Optional: underwater working system.
5. Greasing system.
6. Only two parts in movement.
7. Wide range of tools for different applications.

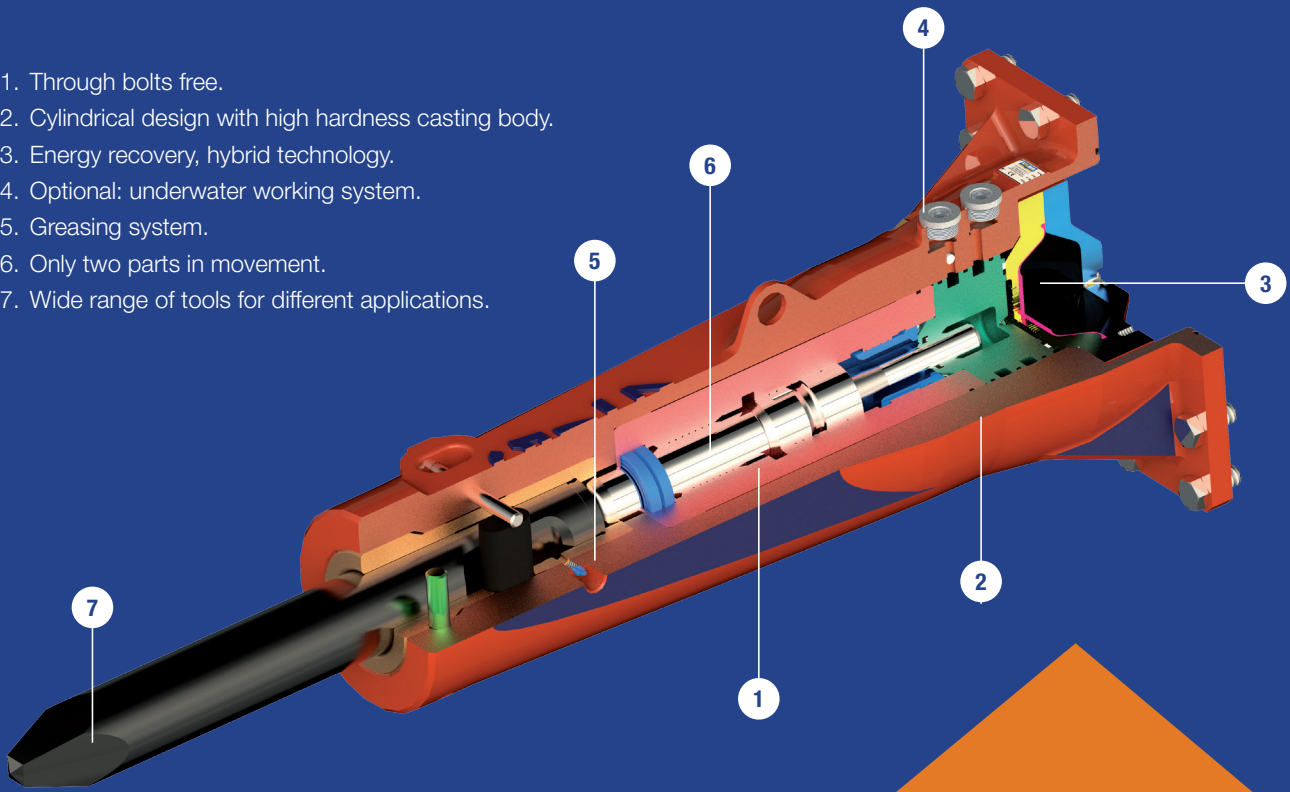

# Solutions for each application


**MOIL TOOL**



**CHISEL TOOL**




**POINT TOOL**



**BLUNT TOOL**



**WIDE CHISEL  
TOOL**



**ELEPHANT  
TOOL**



**POST HOLE  
DRIVER**



**RAMMING  
TOOL**



**DUST PROTECTION  
RING**



Bekolarra 8,  
01010 Vitoria-Gasteiz (España)  
+34 945 24 72 50  
+34 945 22 41 77  
[tabe@tabe-hammers.com](mailto:tabe@tabe-hammers.com)

[www.tabe-hammers.com](http://www.tabe-hammers.com)