

FEATURES

- Temperature range (-40°C ~ +85°C)
Low profile, 7mm height
- Load life 2,000 hours @ 85°C
RoHs COMPLIANT

PART NUMBERING

Part Number Example: 724SL-010/470M5X7F							
724SL	-	010	/	470	M	5X7	F
Type		Rated Voltage		Capacitance Code (μF)*	Tolerance Code	Size	RoHs Compliant

* Capacitance Code: First two digits represent significant figures, third digit represents multiplier (number of zeros).


SPECIFICATIONS

Operating Temperature Range	-40°C ~ +85°C								
Rated Voltage Range	4 ~ 63 VDC								
Capacitance Range	.1 ~ 470μF								
Capacitance Tolerance	±20% (120Hz 20°C)								
Leakage Current Max μA	I = 0.01 CV or 3μA whichever is greater after 1 minute @ rated voltage								
DF (%) @ +20°C 120Hz max	Working Voltage	4	6.3	10	16	25	35	50	63
	DF (%)	25	22	20	16	14	12	10	9
Low Temperature Characteristics Impedance Ratio Max @ 120Hz	Working Voltage	4	6.3	10	16	25	35	50	63
	Z-25°C / Z+20°C	7	4	3	2	2	2	2	2
	Z-40°C / Z+20°C	15	8	6	4	4	3	3	3
Load Life 2,000Hrs @ 85°C and rated voltage	Cap change	≤ ±20% of Initial measured value (4v : ≤ ±30%)							
	DF	≤ 200% of Initial measured value							
	Leakage current	≤ Initial measured value							
Shelf Life 1,000Hrs @ 85°C	Cap change	≤ ±20% of Initial measured value							
	DF	≤ 200% of Initial measured value							
	Leakage current	≤ Initial measured value							

MULTIPLIER FOR RIPPLE CURRENT VS FREQ.

FREQUENCY (Hz)	50(60)	120	400	1K	10K	50-100K
≤10μF	0.8	1	1.3	1.45	1.65	1.7
>10 ≤100μF	0.8	1	1.23	1.36	1.48	1.53
>100μF	0.8	1	1.16	1.25	1.35	1.38

DIMENSIONS

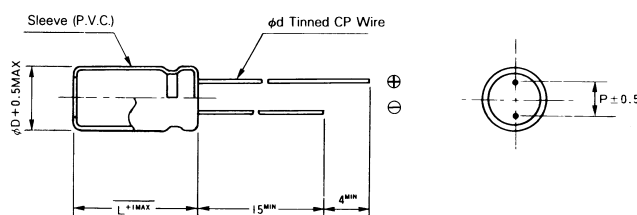

DIMENSIONS (UNIT: mm)

Diam	4	5	6.3	8
F	1.5±.5	2±.5	2.5±.5	3.5±.5
Φ	0.45			0.5

CAP. (μ F)	4 vdc Surge 5v		6.3 vdc Surge 8v		10 vdc Surge 13v		16 vdc Surge 20v		25 vdc Surge 32v	
	SIZE	RIPPLE	SIZE	RIPPLE	SIZE	RIPPLE	SIZE	RIPPLE	SIZE	RIPPLE
4.7									4X7	17
6.8							4X7	20	4X7	21
10							4X7	30	4X7	30
									5X7	33
15					4X7	28	4X7	32	5X7	38
22	4X7	23	4X7	31	4X7	35	4X7	37	5X7	45
							5X7	42	6.3X7	48
33	4X7	26	4X7	32	4X7	40	4X7	45	5X7	52
			5X7	35	5X7	45	5X7	50	6.3X7	60
47	4X7	35	4X7	40	4X7	47	5X7	61	6.3X7	68
			5X7	47	5X7	51	6.3X7	67	8X7	72
68	5X7	55	5X7	55	5X7	60	6.3X7	72	6.3X7	75
					6.3X7	68				
100	5X7	58	5X7	65	5X7	80	6.3X7	95	8X7	115
			6.3X7	75	6.3X7	90	8X7	105		
220	6.3X7	65	6.3X7	70	6.3X7	105				
			8X7	90	8X7	125				
330	6.3X7	90	8X7	120						
470	8X7	120								

RIPPLE CURRENT mA @ 120Hz 85°

CAP. (μ F)	35 vdc Surge 44v		50 vdc Surge 63v		63 vdc Surge 79v	
	SIZE	RIPPLE	SIZE	RIPPLE	SIZE	RIPPLE
0.1			4X7	1.5	4X7	1.5
0.15			4X7	1.8	4X7	1.8
0.22			4X7	2.5	4X7	2.5
0.33			4X7	3.5	4X7	3.5
0.47			4X7	5	4X7	6
0.68			4X7	7	4X7	7
1			4X7	10	4X7	12
1.5			4X7	13	4X7	14
2.2			4X7	19	4X7	19
3.3			4X7	24	5X7	25
4.7	4X7	22	4X7	27	5X7	29
			5X7	29	6.3X7	33
6.8	4X7	24	5X7	32	6.3X7	35
	5X7	28	6.3X7	33		
10	4X7	30	5X7	35	6.3X7	40
	5X7	35	6.3X7	38		
15	5X7	38	6.3X7	52	8X7	55
	6.3X7	45				
22	5X7	50	6.3X7	60	8X7	65
	6.3X7	58	8X7	63		
33	6.3X7	54	8X7	78		
	8X7	68				
47	8X7	80				
68	8X7	85				

RIPPLE CURRENT mA @ 120Hz 85°