


#5956

HIGH VOLTAGE METALLIZED CAPACITORS

PPMHT 300-068 d K

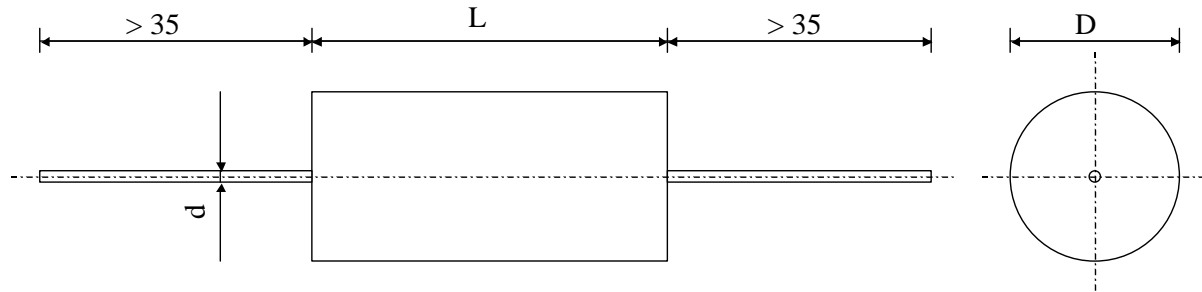

Dielectric of metallized polypropylene

Polyester wrapped / Epoxy resin sealing

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.68	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	3000	VDC	
Rated voltage	Un AC	600	Veff	50 Hz
slope of voltage variation	du/dt max.	205	V/ μsec	max. repetitive
RMS current	I RMS max.	6.6	Aeff	10 kHz
Tangent delta	tg δ	< 5	10^{-4}	1 V / 1 kHz
Equivalent serie resistance	ESR	21	m Ω	1 V / 10 kHz
Stray inductance	ESL	≤ 50	nH	
Insulation resistance	Ri	$> 44'000$	M Ω	500 VDC - 1 min
Test voltage between terminals	U T1	5'000	VDC	10 s
Operating temp.		- 40 / + 85 °C		
Estimated operational life (-3%)		100000	h	Un DC / 70°C

Dimension	Symbol	Value	Unit	Conditions
Diameter	\varnothing	30.5	mm	
Lenght	L	48	mm	
Terminals				
Axial tinned wire	d	1.0	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecaniché
Capacitors
A FISCHER & ZAUSCHKE COMPANY

HJJ

www.Lcap.ch
 24.08.2010

capinfo@Lcap.ch
 faisab5956.XLS