


#6072

HIGH VOLTAGE METALLIZED CAPACITORS

PPMHT 400-147 dfs K

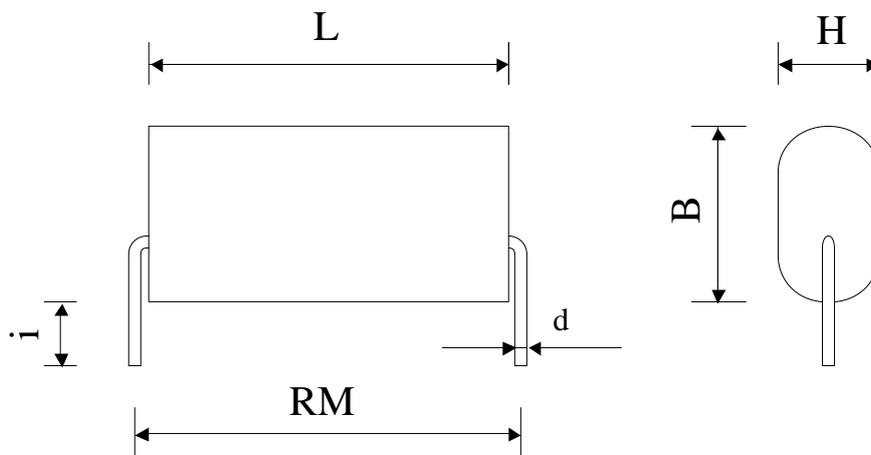

Dielectric of metallized polypropylene

Plastic sleeve / Epoxy resin sealing

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	47	nF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	4'000	VDC	
Rated voltage	Un AC	750	Veff	50 Hz
slope of voltage variation	du/dt max.	1'200	V/ μ sec	max. repetitive
RMS current	I RMS max.	2.2	Aeff	10 kHz
Tangent delta	tg δ	< 4	10 ⁻⁴	1 V / 1 kHz
Tangent delta	tg δ	< 5	10 ⁻⁴	1 V / 10 kHz
Stray inductance	ESL	≤ 50	nH	
Insulation resistance	Ri	>100'000	M Ω	500 VDC - 1 min
Test voltage between terminals	U T1	8'000	VDC	10 s
Operating temp.		- 40 / + 85 °C		
Estimated operational life (-3%)		100'000	h	Un DC / 70°C

Dimension	Symbol	Value	Unit	Conditions
Width	B max	26.5	mm	
Height	H max	11	mm	
Length	L max	47	mm	
Terminals				
Axial tinned wire	d	$\varnothing 1.5$	mm	
	i	4.5 ± 0.5	mm	
	RM	51 ± 0.5	mm	
	M1			
	M0			
Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecaniché
Capacitors
A FISCHER & TALSCHER COMPANY

HJJ

www.Lcap.ch
 09.01.2012

capinfo@Lcap.ch
 faisab6072.XLS