


#6077

METALLIZED POLYPROPYLENE CAPACITORS

PAM 27-55.0 cv3 K

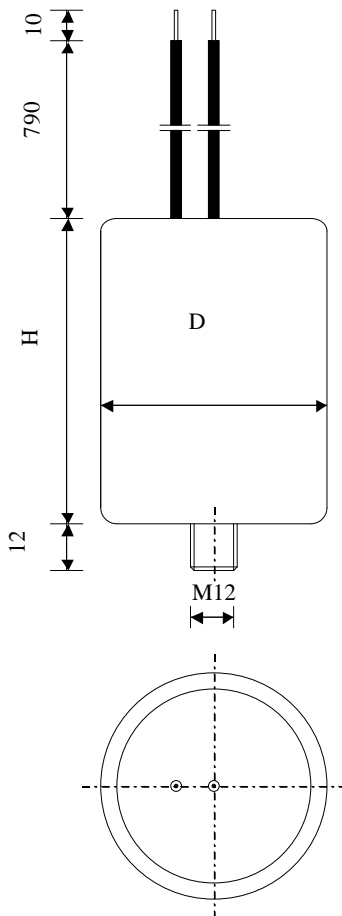

Parallel internal resistance
39 k Ω / 3 W

Dielectric of metallized
polypropylene

Polyurethane resin end sealing

Aluminium case

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	55	μ F	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un AC	270	VAC	50 / 60 Hz
Tangent delta	tg δ	≤ 13	1C ⁴	1 V / 100 Hz
Test voltage between terminals	U T1	600	VDC	1 min
Test voltage terminals to case	U T2	2500	VAC	50 Hz / 1 min
Dimension	Symbol		Unit	Conditions
Diameter	D	60	mm	
Height	H	100	mm	
Terminals				
Cable		800	mm	
section		1.23	mm ²	
fixing stud		M12 x 12	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains
Kondensatoren Tel.: ++41 24 445 66 88
Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSIG COMPANY

HJJ

www.Lcap.ch
16.01.2012

capinfo@Lcap.ch
faisab6077.XLS