


#6280

## Discharge CAPACITORS

PPMF 5000-130 uv K

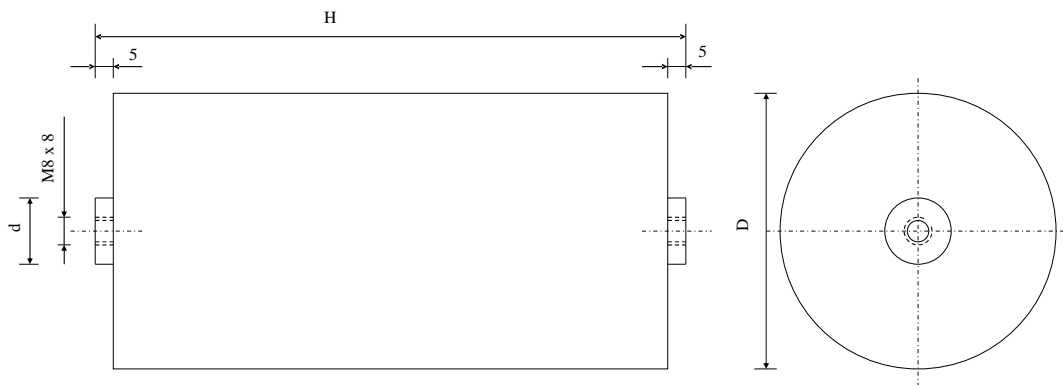

Dielectric of metallized polypropylene - Plastic tube

Polyurethane resin end sealing - Threaded outputs

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.030	$\mu\text{F}$	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un DC	50'000	VDC	
Maximum Reverse Voltage	U inv.	50	%	
Maximum Peak current	I p	1300	A	
Maximum Repetition frequency	Fr	10	Hz	
Maximum RMS Current	Ieff	15	A	
Tangent delta	tg $\delta$	$\leq 5$	$10^{-4}$	1 V / 1 kHz
Equivalent serie resistance	ESR	$\leq 30$	m $\Omega$	100 kHz
Stray inductance	ESL	$\leq 400$	nH	
Insulation resistance	Ri	$> 100'000$	M $\Omega$	500 VDC - 1 min
Test voltage between terminals	U T1	70'000	VDC	1 min.

Dimension	Symbol	Value	Unit	Conditions
Diameter	D	90	mm	
Height	H	$300 \pm 1.0$	mm	
Terminals				
Thread		M8 x 8	mm	
	d	22		
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TAUSSCH COMPANY

HJJ

www.Lcap.ch  
 01.04.2014

capinfo@Lcap.ch  
 faisab6280.XLS