


#6196

## Security Capacitors


CKT 501-4BDF 25-22.0 K

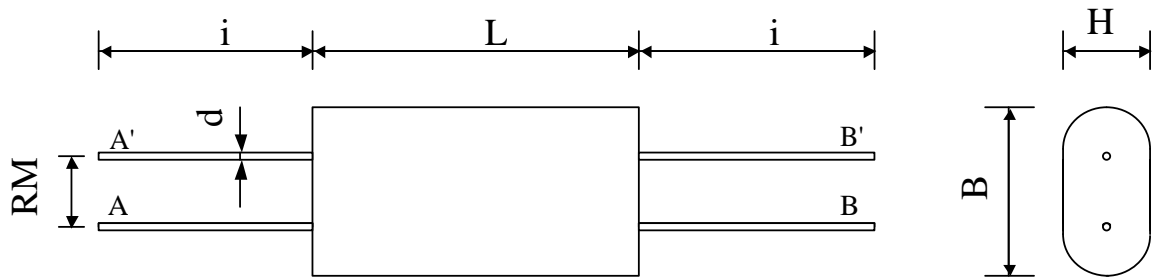

According to NFF 62-102 except for dimensions

Dielectric of metallized polyester

Polyester wrapped UL510 / Epoxy resin sealing UL 94-V0



Parameter	Symbol	Value	Unit	Condition
Capacitance	C	22	$\mu\text{F}$	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un DC	250	VDC	
Rated voltage	Un AC	160	Veff	50 Hz / 85°C
Tangente delta	$\text{tg}\delta$	$\leq 80$	$10^{-4}$	1 kHz
Insulation resistance	Ri	$> 500$	$\text{M}\Omega$	100 VDC - 1 min
Test voltage between terminals	U T1	400	VDC	10 s
Operating temperature		- 55 / + 125 °C		
Dimension	Symbol	Value	Unit	Conditions
Width	B max	35	mm	
Height	H max	20	mm	
Length	L max	45	mm	
Terminals				
Radial tinned wire	d	1	mm	
RM		$12.7 \pm 1.0$	mm	
Length	i	$> 25$ mm		
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1401 Yverdon-les-Bains  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FRISCHER & TAUSSCHÉ COMPANY

HJJ

11.06.2013

faisab6196.XLS