


#6229

Metallized polypropylene capacitors

PPM 210-2000.0 r K

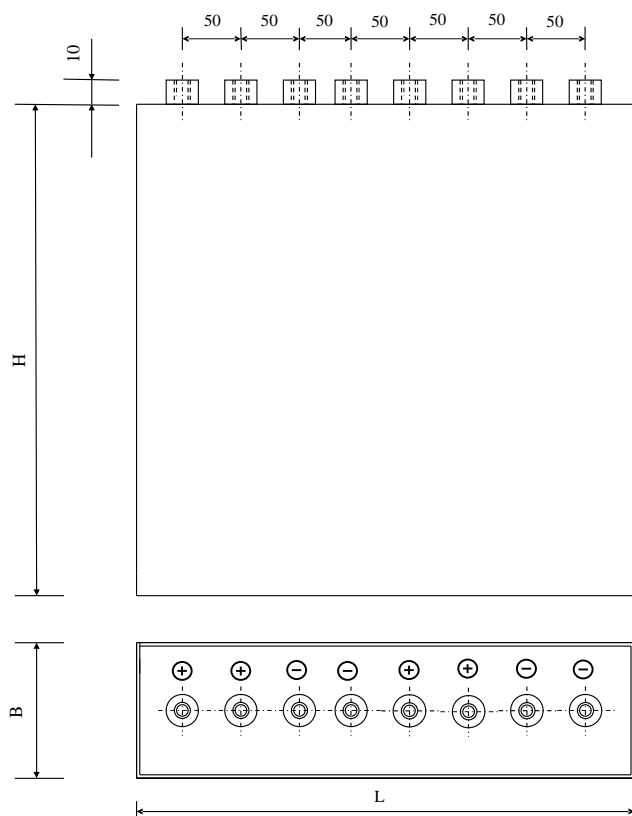

Dielectric of metallized polypropylene

Threaded outputs

Resin end sealing

Stainless steel case

(1) Maximum Hot spot Temperature 85°C

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		2000	μF	1 V / 100 Hz
Tolerance			± 10	%	
Rated voltage	Un DC		2'100	VDC	
Surge voltage	Us		3'200	VDC	
current	I cr. max		40'000	A	
Surge current	I cr. max		60'000	A	
Reated current forced air > 2 m/s	I RMS	(1)	400	A	200 Hz
Peak current forced air > 2 m/s	I RMS	(1)	500	A	200 Hz
Equivalent serie resistance	ESR		≤ 0.41	mΩ	1 kHz
Stray inductance	ESL		≤ 120	nH	
Insulation resistance	Ri x C		> 10'000	s	500 VDC - 1 min
Test voltage between terminals	U T1		3'250	VDC	10 s
Test voltage between terminals to case	U T2		5'000	VAC	50 Hz - 1 min
Operating temp.			- 20 / + 70 °C		
Estimated operational life (-5 %)			100'000	h	2100 V / 70°C
Estimated operational life forced air 2m/s	400 A / 200 Hz	T. amb. 45°C	100'000	h	1750 V
Estimated MTBF forced air 2m/s	400 A / 200 Hz	T. amb. 45°C	10	Mh	1750 V
Dimension	Symbol			Unit	Conditions
Width			95	mm	
Length			450	mm	
Height			550	mm	
Thread (8 x)			M8 x 8	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FIEBIGER & TAUSSCH COMPANY

HJJ

www.Lcap.ch
 02.12.2013

capinfo@Lcap.ch
 faisab6229.XLS