


#5920

HIGH TEMPERATURE FILM CAPACITORS

MKS 4-3.3 ad F

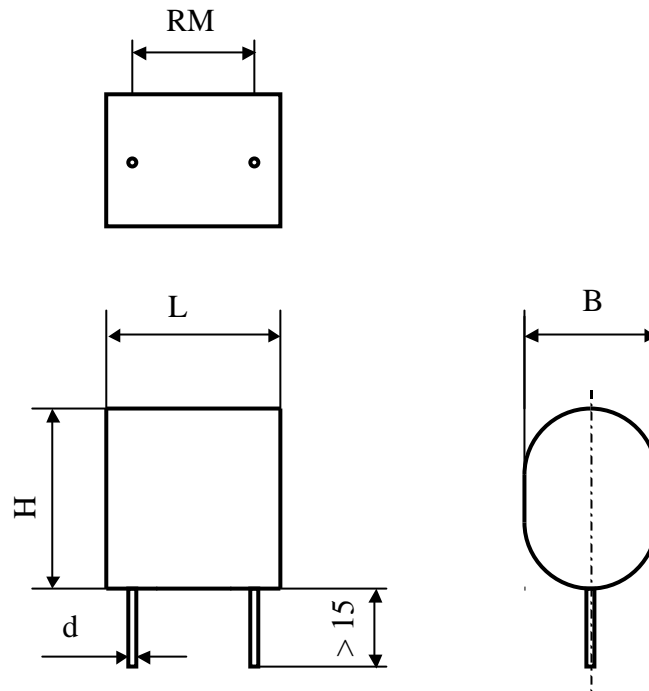

Dielectric of metallized polyphenylene sulfide
 Polyester wrapped, Flammability UL 510
 Epoxy resin sealing UL 94-V0

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		3.3	μF	1 V / 1 kHz
Tolerance			± 1	%	
Rated voltage	Un DC		40	VDC	
Tangent delta	tg δ		≤ 20	10^{-4}	1 V / 1 kHz / 22°C
Stray inductance	ESL		≤ 50	nH	
Insulation resistance	Ri		> 3330	M Ω	40 VDC - 1 min
Test voltage between terminals	U T1		63	VDC	10 s
Operating temperature			- 40 to + 85	°C	
Dimension	Symbol			Unit	Conditions
Width	B max		13	mm	
Height	H max		20	mm	
Length	L		20	mm	
Terminals					
Radial tinned wire	d		0.8	mm	
RM			15.24 ± 0.5	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Le Lanché
Capacitors
A FISCHER & TAUSSCHER COMPANY

HJJ

www.Lcap.ch
 21.04.2010

capinfo@Lcap.ch
 faisab5920.XLS