


#7000

HIGH VOLTAGE METALLIZED CAPACITORS

PPM 200-022 d K

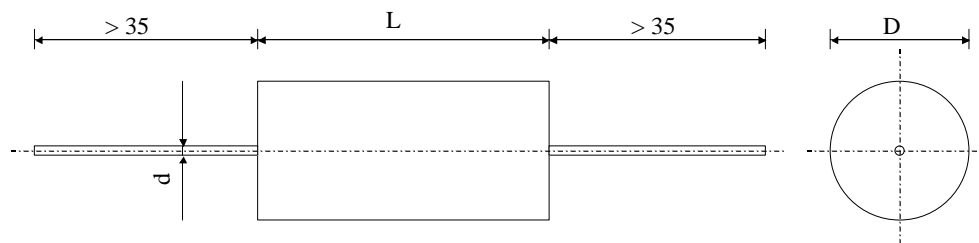

Dielectric of metallized polypropylene

Plastic sleeve / Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		220	nF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		2'000	VDC	
Rated voltage	Un AC		1000	Veff	50 Hz
slope of voltage variation	du/dt max.		500	V/ μ sec	max. repetitive
RMS current	I RMS max.		5.00	Aeff	10 kHz
Tangent delta	tg δ		< 4	10 ⁻⁴	1 V / 1 kHz
Tangent delta	tg δ		< 4	10 ⁻⁴	1 V / 10 kHz
Stray inductance	ESL		≤ 50	nH	
Insulation resistance	Ri		>100'000	M Ω	500 VDC - 1 min
Test voltage between terminals	U T1		3'600	VDC	10 s
Operating temp.			- 55 / + 70 °C		
Estimated operational life (-3%)			100'000	h	Un DC / 70°C
Dimension	Symbol			Unit	Conditions
Diameter	D		25	mm	
Lenght	L		48	mm	
Terminals					
Axial tinned wire	d		1.0	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecranché
Capacitors
A FISCHER & TOSCHKE COMPANY

HJJ

www.Lcap.ch
 03.05.2012

capinfo@Lcap.ch
 faisab7000.XLS