


#5941

METALLIZED POLYPROPYLENE CAPACITORS

PPM 200-322 g K

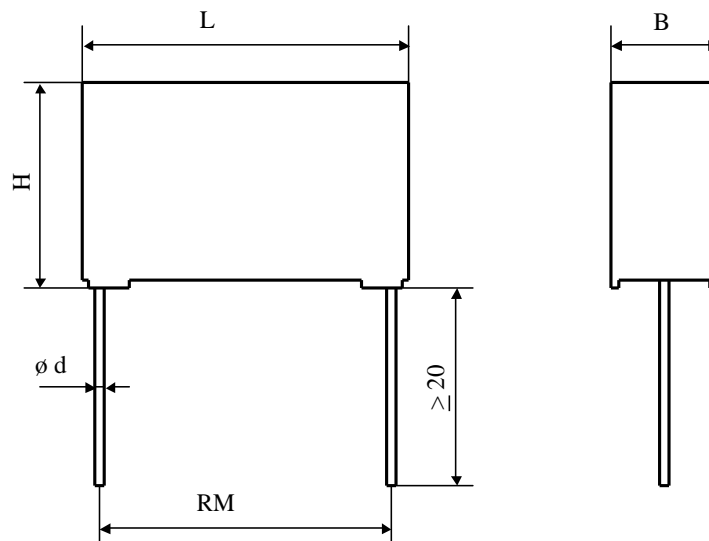

Dielectric of metallized polypropylene

Self-extinguishing plastic housing / Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		220	pF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC	85°C	2000	VDC	
Rated voltage	Un AC	75°C	700	VAC	50 Hz to 50 kHz
slope of voltage variation	du/dt max.		9500	V/μsec	max. repetitive
Repetitive surge current	I cr. max		2.09	A	
Tangent delta	tgδ		4	10 <sup>-4</sup>	1 V / 1 kHz
Stray inductance	ESL		≤ 40	nH	
Insulation resistance	Ri		> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1		3200	VDC	10 s
Operating temperature			- 55 / + 105	°C	
Estimated operational life (-3%)			100'000	h	Un DC - 70°C
Dimension	Symbol			Unit	Conditions
Width	B		5.5	mm	
Height	H		11.5	mm	
Length	L		18	mm	
Terminals					
Axial tinned wire	d		ø 0.8 x 20	mm	
	RM		15	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland

Kondensatoren Tel.: ++41 24 445 66 88

Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TAUSSCHKE COMPANY

HJJ

www.Lcap.ch  
08.06.2010capinfo@Lcap.ch  
faisab5941.XLS