


#5955

METALLIZED POLYPROPYLENE CAPACITORS

PPM 70-650.0 cvs5 K

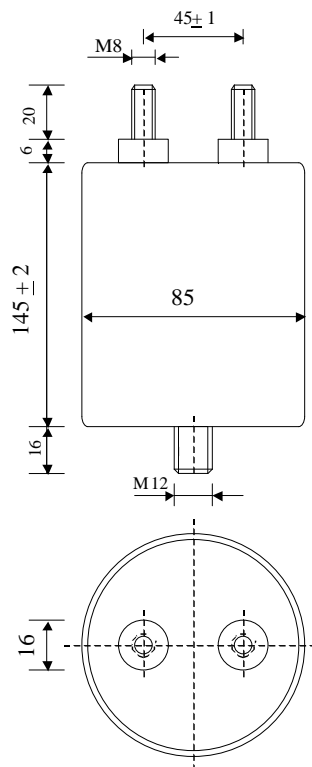

Dielectric of metallized polypropylene

Threaded outputs

Resin end sealing

Aluminium case

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	650	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	700	VDC	
Maximum Voltage 100 ms	Um	740	V	every 10 min
RMS Current permanent	I <sub>eff max.</sub>	18	A <sub>eff</sub>	12 kHz
Repetitive surge current	I cr. max	1400	A	
Tangent delta	tgδ	≤ 185	10 <sup>-4</sup>	1 V / 1 kHz
Equivalent serie resistance	ESR	25°C to 70°C	3.9	mΩ
Stray inductance	ESL		≤ 60	nH
Insulation resistance	Ri x C		≥ 30'000	s
Test voltage between terminals	U T1		1150	VDC
Test voltage terminals to case	U T2		2500	VAC
Climatic category			27/70/56	
Estimated operational life (-5 %)			> 100'000	h

Dimension	Symbol	Value	Unit	Conditions
Diameter	D	85	mm	
Height	H	145	mm	
Terminals				
Thread		M8 x 20	mm	
Thread spacing	e	45	mm	
Fixing stud		M12 x 16	mm	
Mass approx.	m		kg	

	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 447 22 82  
 Capacitors Fax: ++41 24 447 22 85

**Leclanché**  
**Capacitors**  
A FISCHER & TAUSSIG COMPANY

HJJ

www.Lcap.ch  
 24.08.2008

capinfo@Lcap.ch  
 faisab5955.XLS