


#5918

Metallized polypropylene capacitors

PPM 75-20000.0 r K

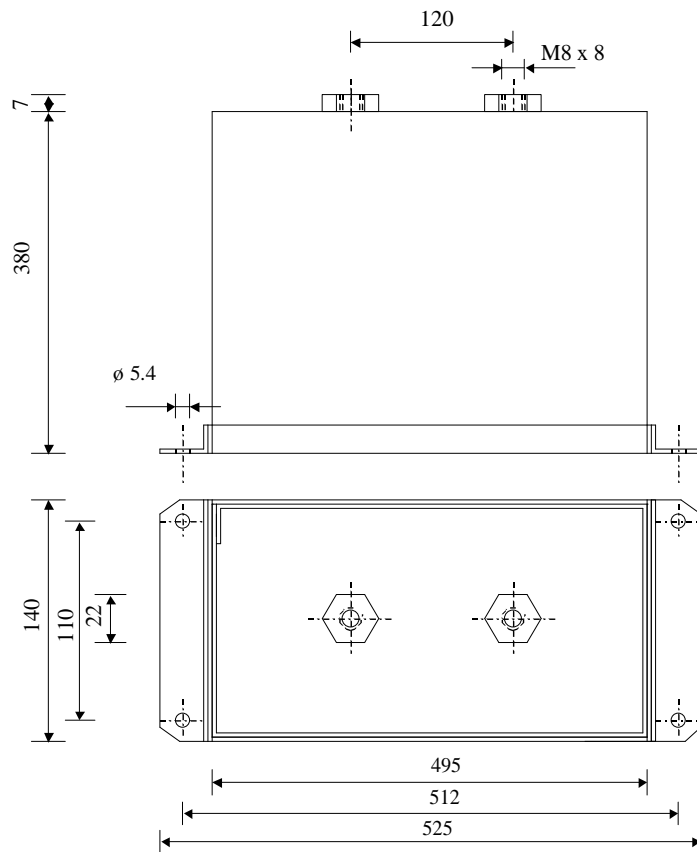

Dielectric of metallized polypropylene

Threaded outputs

Resin end sealing

Aluminium case thick 1.2 mm

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		20000	$\mu\text{F}$	1 V / 100 Hz
Tolerance			$\pm 10$	%	
Rated voltage	Un DC		750	VDC	
Surge current	I cr. ma		20'000	A	
Equivalent serie resistance	ESR		$\leq 1.0$	m $\Omega$	1 kHz
Stray inductance	ESL		$\leq 60$	nH	
Insulation resistance	Ri x C		$> 10'000$	s	100 VDC - 1 min
Test voltage between terminals	U T1		1'050	VDC	10 s
Test voltage between terminals to case	U T2		2'500	VAC	50 Hz - 1 min
Estimated operational life (-5 %)			30'000	h	Un DC / 40°C
Dimension	Symbol			Unit	Conditions
Width	B		140	mm	
Length	L		495	mm	
Height	H		380	mm	
Thread			M8 x 8	mm	
Thread spacing			120	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Le lanché**  
**Capacitors**  
A FROCHER & SAUDON COMPANY

HJJ

www.Lcap.ch  
 12.04.2010

capinfo@Lcap.ch  
 faisab5918.XLS