



Hybrid Power

AEP 300

Bidirectional AC/DC converter



- Innovative in energy storage & Power Electronics
- Custom-made solutions
- Complete solution: storage & Power Electronics
- Design and system integration

Features

- 76 kW converter, U_n 400VAC
- Bidirectional half bridge 3-phase topology
- Load-dependent PWM fan control
- Low output current ripple for DC/DC application
- Short-circuit-proofed output
- Integrated current and temperature sensors
- CAN-Bus communication

Applications

- Drive of AC- or DC-motors (including regenerative energy)
- Active filter
- Active Front End

Mechanical Data

Width x Depth x Height

502 x 477 x 203 mm

Approx. 22 kg

aephybridpower.com
sales@aephybridpower.com
+31 (0)78 692 2100



Technical Characteristics

Symbol	Parameter	Description	Value	Unit
	General			
P _R	Rated power	@Uout 400VAC, cos (ϕ)=1	76	kW
P _{MAX}	Max. power	@Uout 400VAC, fr 2kHz 1min/10min	118	kW
F _r	Switching frequency		≤16	kHz
η _r	Efficiency	@P _r	>95	%
	Input			
U _{in}	Input voltage range		400 – 690	VAC
U _{in, max}	Nominal frequency	±10%	50/60	Hz
	Nominal phase current		110	A
	Max. phase current	1 min / 10 min	170	A
	Output			
U _{out}	Output voltage range	Depending on AC input voltage	500 - 1100	VDC
U _{out,max}	Max. operating voltage		1200	VDC
	Supply power			
	Control voltage	Rated Value between	24	VDC
			18 till 30	VDC
	Control current		2	A
	Environment			
T _o	Operating temperature		0 till 50	°C
T _{m_max}	Advisable temperature		20 till 40	°C
T _s	Storage temperature		-20 till 60	°C
	Protection degree		IP20	
	Cooling			
	Kind		Forced air cooling	
	Power losses		≤1500	W
	Airflow		600	m ³ /h
	Communication			
	Data	CAN 2.0B / RS232		
	Binary signal	On/Off, Enable, Error, Reset, Emergency stop		
	Additionally	Conventional error, Temperature output		

Options

- IP20 & IP65
- Water cooling
- Profibus / Profinet
- Main contactor + Pre-charge

Mechanical Data

Width x Depth x Height: 502 x 477 x 203 mm

Weight converter: Approx. 22 kg

Enclosure: IP-20

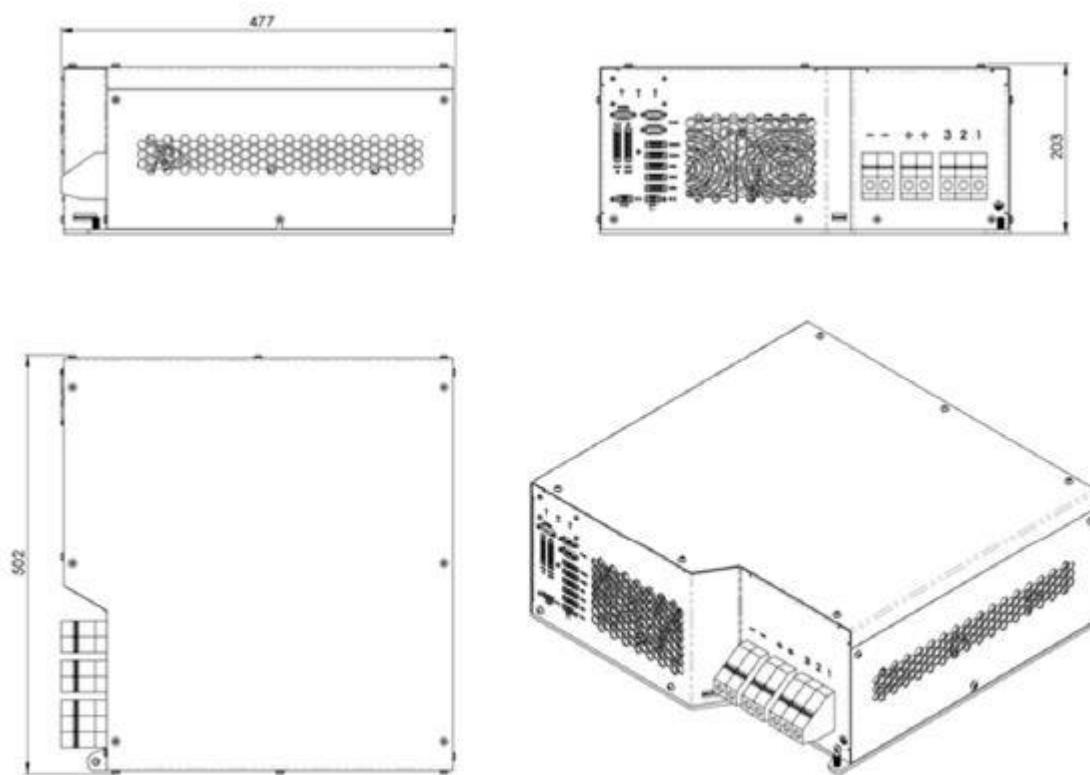


Figure 1: Dimensions

Accessories

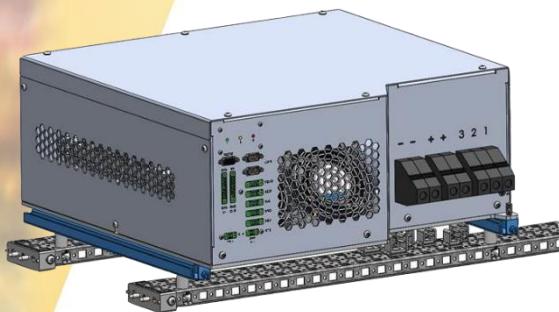


Figure 2: Mounting rails



Figure 3: Pre-charge



Figure 4: EMC filter



Figure 5: Voltage measurement



Figure 6: Output cap