

Overview

The powered level unwind is designed to unwind of pressure sensitive tear strip tapes for application to overnight envelopes or corrugated products when used with the Model T-626 or T-627 applicators. The tape applicator can be mounted over a moving product or conveyor or used on custom designed taping equipment

OPTIONS

- Controls systems to start and stop the application of the tape
- Tape low or tape out sensors
- 220v AC, 50/60 Hz

OPTIONS


- Tape Roll Diameter: 15" OD x 6" high – 6" ID x 7" long core, larger units available
- Level Wound Roll: 1/8" – 1/4" wide level wound roll
- Optional 1/4" – 1" wide
- Application Speeds: Up to 350' per minute

Note: The tape cut-off creates a serrated cutoff for the tape. The tape gripper will leave some marks on the adhesive side of the tape approximately 1/2" (13mm) from the leading end of the tape.

The powered unwind can be used the the model T-627 or T-626 applicator. The T-626 is shown at right. Both are available in either RH or LH.



LWPU

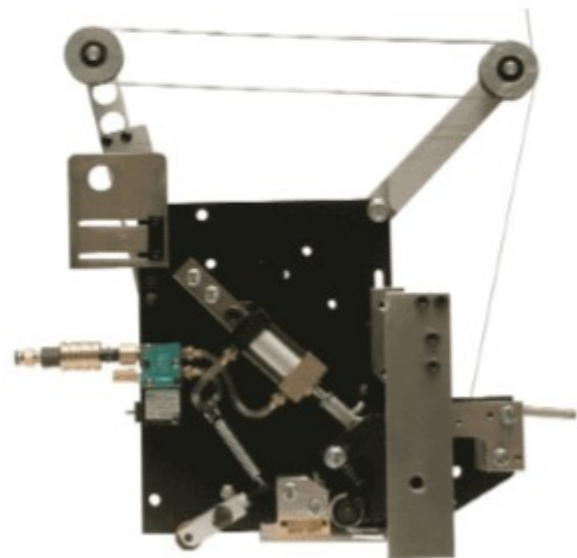

T-626

•

THE AETEE GROUP

"A job's not finished until it's finished."



At AeTee our focus is on the Print Finishing market, providing high quality finishing equipment that offers versatility, flexibility and value. We believe in partnering with our customers, not just supplying equipment, and together finding solutions for your current needs as well as helping to identify future productivity potential.

With this at our core, we are continuously looking at ways to evolve our product line, ahead of market development and customer led demand. Please contact us even if you cannot see what it is you are looking for... If it is not something we currently supply, we will happily try and source it for you.