


HEAVY DUTY TEMPORARY ACCESS AND GROUND PROTECTION MAT

FOR SAFE, TEMPORARY
ACCESS ACROSS
SOFT GROUND AND IN
EXTREME WET WEATHER
CONDITIONS, PIPELINE
MAT SERIES IS THE
ULTIMATE EXTREME
HEAVY DUTY ROAD MAT



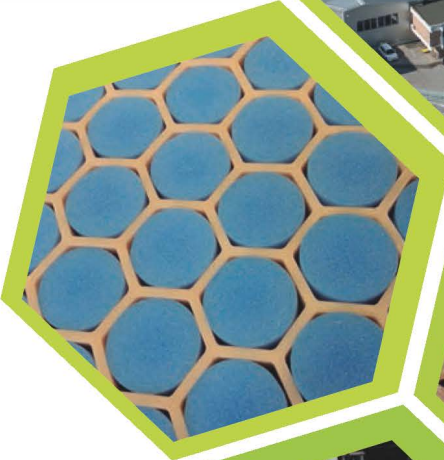

KEY FEATURES

- Outstanding compressive strength - more than 415 tonnes/m² reaching max force 730 tonnes/m²
- Each mat has two excellent traction surfaces
- Surface traction design for safe movement of vehicles
- Foam filled core prevents water ingress if mat is punctured (no cross contamination and no additional weight)

KEY BENEFITS

- Compression moulded high performance thermoplastic material
- Robust, durable, high performance mat
- Overlap lip for interlocking mats to make roadways or working pads
- Patented Four3 connector pin system
- Cellular core construction provides buoyancy in water-logged areas
- Highly efficient weight dispersal across a wide range of ground conditions
- Reduce dust pollution on dry soils
- Protect sensitive habitats
- Protect ground from pedestrian traffic
- Easy and durable connection system
- Customer logo option
- Long life and recyclable at end of life



APPLICATIONS-MAIN SECTORS

- Oil and gas
- Utilities
- Construction
- Petrochemical
- Transmission
- Temporary helipads
- Wind farms
- Pipelines
- Quarries and mining
- Commercial timber and woodlands operations
- Any project requiring safe temporary access for heavy vehicles and equipment



SAFETY AND EFFICIENCY

Engineered for performance and strength, the interlocking mats distribute weight across a large surface area while remaining stable and strong through all operating conditions. The surface tread improves traction and safety for load-bearing vehicles, while the patented Four3 connection system reduces mat drift and slippage. The mats provide years of reusable performance with proper use and maintenance.


General information	
Overall Area	4000 x 2000 mm
Height	Total 102 mm, Core 94 mm
Useable Surface Area	1,8 x 3,8 m = 6.84 m ²
Weight	360kg
Colour	Sand (standard), other colours optional
Logistic	Standard high cube 40 feet container 50 mats, Truck standard EU 60 mats
Handling	Designed for end users, 2-sided mat; for different type of vehicles
Recycling	100% recyclable
Safety	Nub structure prevents slips, trips, falls
Environmental	No liquid absorption, chemically inert, allows easy decontamination-cleaning
Compressive load capacity: 605 psi*	415 tonnes m ²
Load bearing capacity	In excess of 200t*
Fire Rating	UL 94HB

*Load capacity is dependent on ground conditions

ANALYSIS AND TESTING OF MATS

FEA Analyses

Faculty of Mechanical Engineering Maribor Slovenia

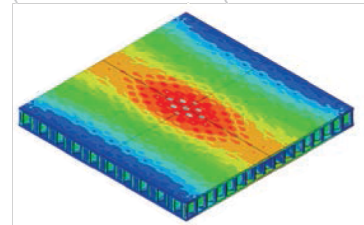


3 POINT LOAD TESTS

Faculty of Civil and Geodetic Engineering/ University of Maribor



COMPRESSION TEST

Faculty of Civil and Geodetic Engineering/ University of Ljubljana

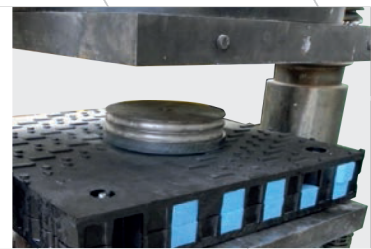

CYCLIC DEFLECTION TEST

Faculty of Civil and Geodetic Engineering/ University of Ljubljana:
100.000 cycles no break



LOW TEMPERATURE TEST AT -40 DEGREES

IABG Munich-Germany
NO BREAK



BENDING TESTS AT AMBIENT TEMPERATURE
NO BREAK

