


CORI-Kombi FPM Reader

This reader with integrated controller offers complete autonomous access control for a door in a compact housing.

For networked access solutions, this reader can also be connected to external controllers and access software. The water-protected and vandal-proof construction in a metal housing is suitable for outdoor use.

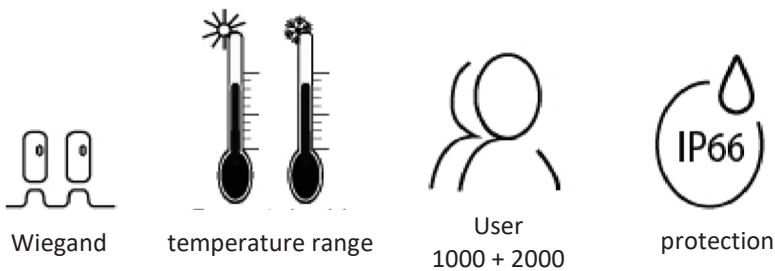

Specification:

- Splash water protected according to IP-66
- Robust vandal resistant design for outdoor use.
- Autonomous access control integrated for a relay
- Memory for 1,000 fingerprints and 2,000 badges
- Output signal Wiegand 26 ~ 44
- Choice of pulse mode for relay switching or toggle mode for input / output signal

Memory for fingerprints badges	3000 1000 2000
Power supply consumption	12V DC < 45mA
Reader for reader frequency range	Mifare, 13.56 MHz to 4 cm
Fingerprint reader resolution identification time FAR FRR	Optical Fingerprint Module 500DPI <1S <0.01% <0.1%
Output signal	Relais, Exit Button, Alarm, Doorcontact, Wiegand Output
Relay Time adjustable power	Ein Relais (NO, NC, Common) 0-99 seconds (5 seconds default) 2 Amp max.
Wiegand Interface	Wiegand 26-44bits output
Protection class operating temperature humidity	IP-66 -30°C ~ 60°C 10% ~ 99%
Execution color Dimensions weight	Zinc-Alloy Silber L128 x B48 x H26 (mm) 400 Gramm

For further technical information and support, please contact
tech@cardservice.ch or call +41 (0) 56 675 70 20.