
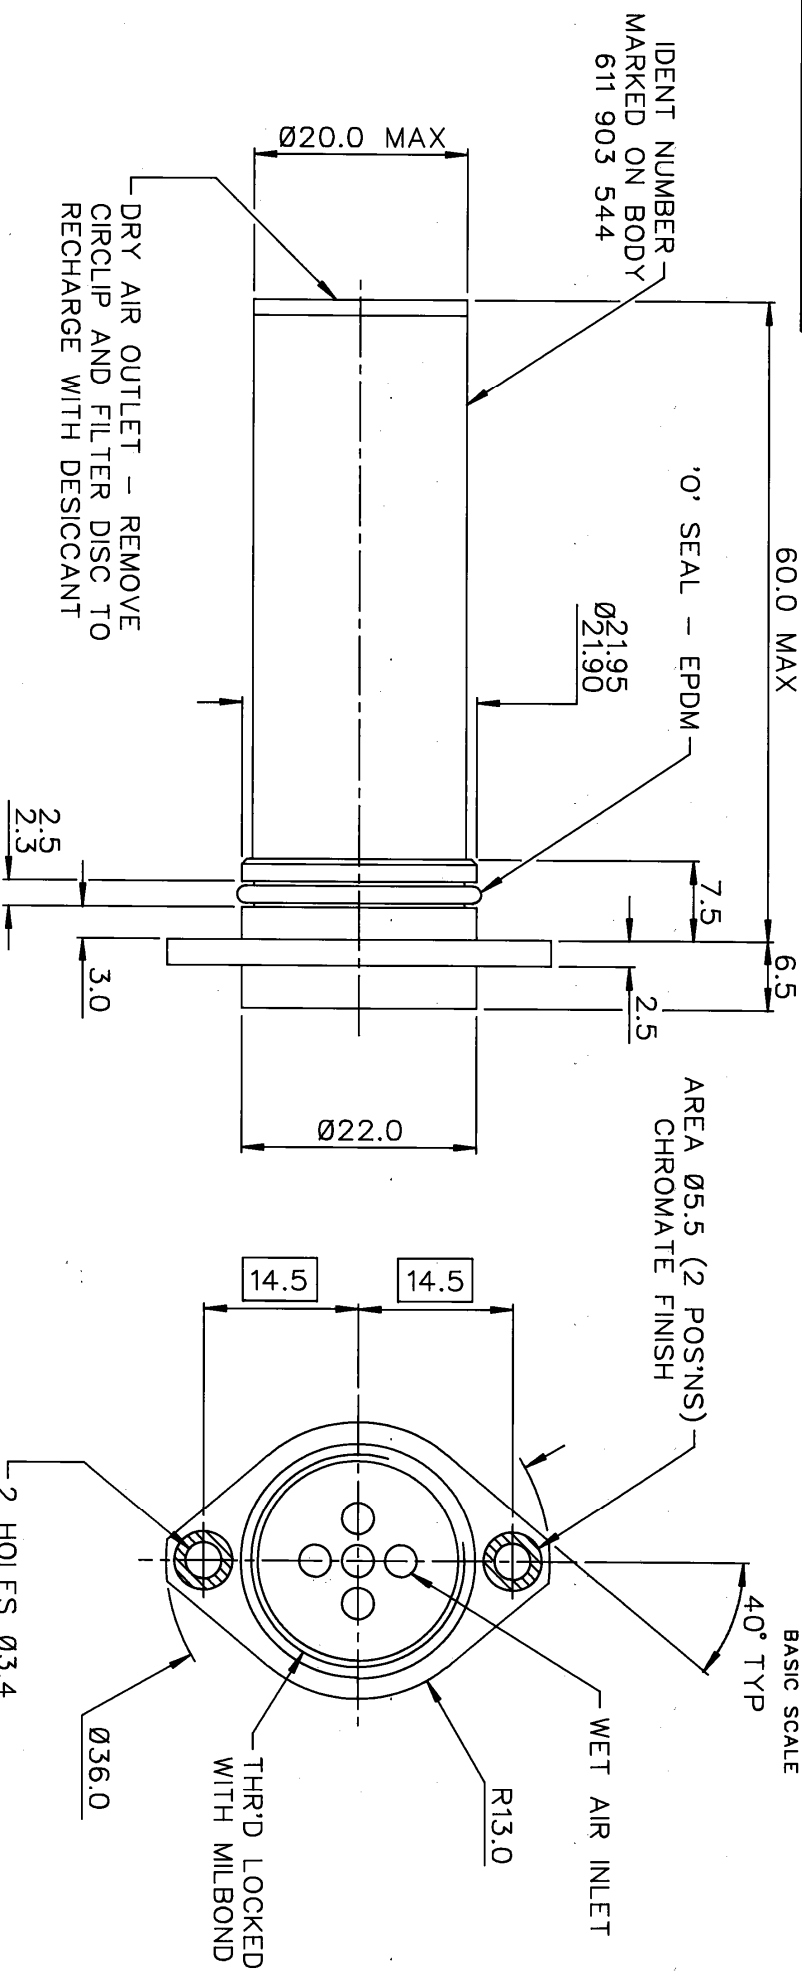


DRG No
BL/D 4604 INST
USED ON

THIRD ANGLE PROJECTION
REMOVE ALL BURRS & SHARP EDGES
DO NOT SCALE - ASK



NOTES

1. CONTAINS APPROX. 10 GRMS NON-INDICATING BEADED SILICA GEL, 1-3mm BEAD, TO BS7554.
2. PACKAGED FOR A 5 YEAR SHELF LIFE. PACKAGING TO BE MARKED WITH SERIAL No.
3. PERFORMANCE SPECIFICATION
- 3.1 DESICCATOR TO BE SUBMERSIBLE WHEN FITTED TO EQUIPMENT, TO A MAXIMUM DEPTH OF 1 METRE.
- 3.2 MINIMUM AIRFLOW THROUGH DESICCATOR, WHEN SUBMITTED TO AN OVER OR UNDERPRESSURE OF 0.1 bar (FROM 1.0 bar), TO BE 0.2 L/MIN.
4. TEST SPECIFICATION
- 4.1 FLOWRATE TEST: 200-250 CC/MIN AT 3-5 INCHES WATER GAUGE.
- 4.2 IMMERSION TEST: 1 METRE FOR 1 HOUR. 2% OF A PRODUCTION BATCH TO BE IMMERSION TESTED FOR A 100% PASS RATE.

MATERIAL	ALUM ALLOY	PROTECTIVE FINISH	ANODISED BLACK (UNLESS OTHERWISE STATED)	TOLERANCES UNLESS STATED	±1.0	TITLE	BROWNELL LIMITED LONDON NW10	CUSTOMER REF.	DRAWN	CHECKED
EST. WT.	—			DIMNS IN mm /mm	SCALE (ORIGINAL) 2 : 1		DESICCANT CONTAINER DEHUMIDIFIER BREATHER TUBE - SUBMERSIBLE			
						DRAWING No	BL/D 4604 INST			

REDRAWN-NOTES CHANGED TO NON-INDICATING	DESICCANT CHANGED	UPDATED	UPDATED	SERIAL No ADDED	UPDATED	NOTE 4 etc ADDED	CHANGE	MOD No	ISSUE	DATE
5928	5780	3846	3797	3639	3604	3429			A	8/1/87
									B	18/12/87
									C	1/2/89
									D	20/3/89