
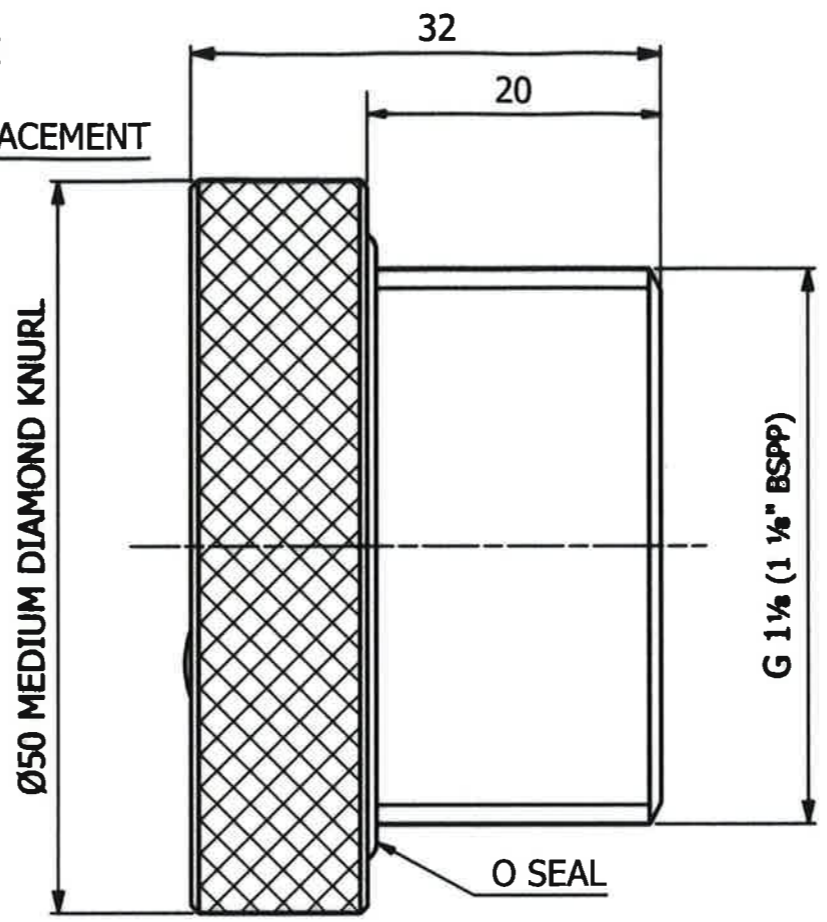


THIS DRAWING IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

DRG No **BL/D10373 INST** REMOVE ALL SHARP EDGES UNLESS SPECIFIED THIRD ANGLE PROJECTION DO NOT SCALE - ASK

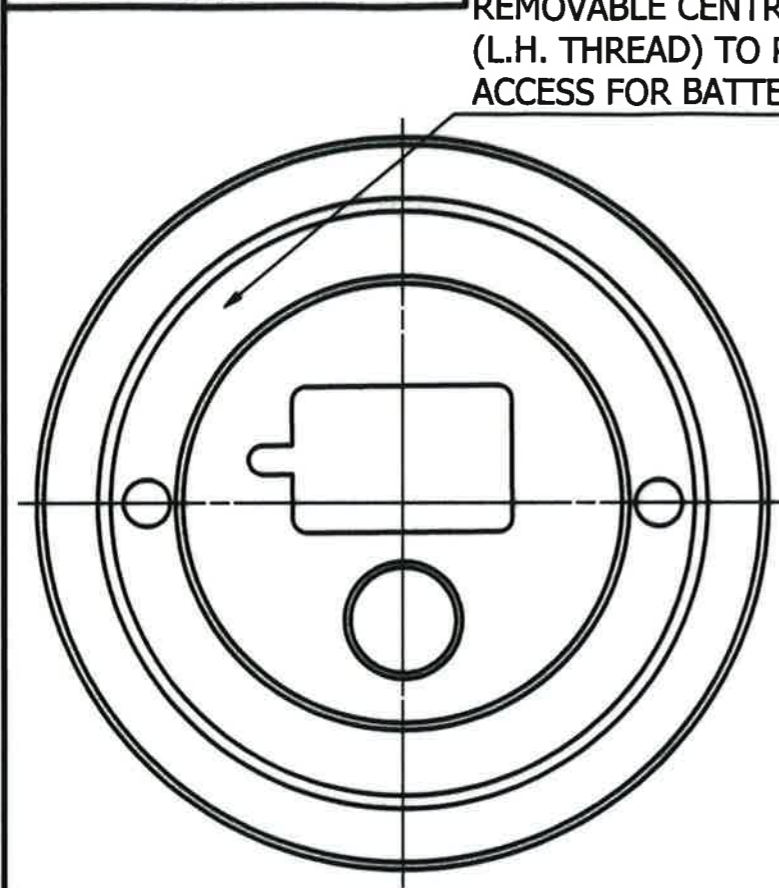

NOTES :-
INGRESS PROTECTION : IP67
OPERATING TEMPERATURE : -20°C to +60°C
STORAGE TEMPERATURE : -40°C to +80°C
POWER SOURCE : FLAT LITHIUM (COIN CELL) BATTERY
NOMINAL VOLTAGE : 3 VOLTS
NOMINAL CAPACITY : 200 mAh
ESTIMATED LIFE : 5 YEARS(BATTERY)
AVAILABLE OPTIONS : RFI

DISPLAY SEQUENCE : for one press of the button

- 1) RELATIVE HUMIDITY - 5 TO 80% RH
- 2) TEMPERATURE - -20°C TO +60°C
- 3) DEWPOINT - -20°C TO +20°C

PERFORMANCE SPEC	6318	2	22-07-09
ORIGINAL		1	03-06-08
CHANGE	MOD No	ISSUE	DATE

MATERIAL ALUMINIUM ALLOY	PROTECTIVE FINISH ANODSED & DYED BLACK	TOLERANCES UNLESS OTHERWISE STATED	±0.5	BROWNELL Ltd. LONDON NW10 7XF	DRAWN PK	CHECKED 		
EST. WT.	-----	SURFACE ROUGHNESS	3.2µ(N8)				TITLE ENVIROMENTAL INDICATOR - G1 1/8 (1 1/8BSPP)	DRAWING NUMBER BL/D10373 INST
		DIMENSIONS IN in/mm	mm					
		SCALE (ORIGINAL)	2:1					

RED DOT=ORIGINAL
BLACK DOT=COPY