



DRG. No.  
BLD3723 INST

USED ON BL/

**THIRD ANGLE PROJECTION**  
THIS DESIGN IS THE PROPERTY OF BROWNELL LTD AND MAY NOT BE REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

**DO NOT SCALE - ASK**

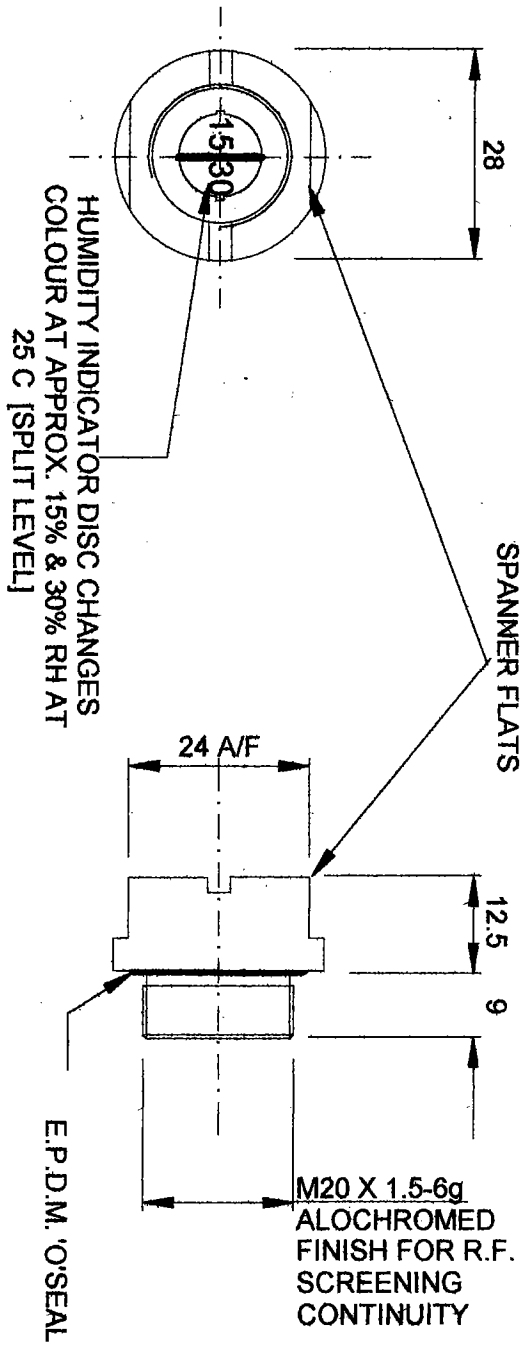

NOT TO EXCEED 0.8um CLA  
**PANEL MOUNTING DETAIL**

HUMIDITY INDICATOR DISC CHANGES COLOUR AT APPROX. 15% & 30% RH AT 25 C [SPLIT LEVEL]

**NOTES:**

INTERNAL THREAD M16 X 1.0 - 6H TO FIT VARIOUS MOLECULAR SIEVES FILLED DESICCANT CONTAINERS DEHUMIDIFIER  
THE ITEM IS PACKAGED FOR A 5 YEAR TEMPERATURE OR 3 YEAR TROPICAL SHELF LIFE IN MFL EITHER INDIVIDUALLY OR ENVELOPES HOLDING 3

MATERIAL ALUMINIUM ALLOY	PROTECTIVE TREATMENT ANODISE & DYE BLACK & ALACHROME	TOLERANCES		BROWNELL LTD. LONDON. NW10 INDICATOR HUMIDITY PLUG R.F. SCREENED STYLE RHPP4M - DEF STAN 66-14 6685-99-225-3312	CHANGE DRAWN NGH CHECKED GGH	MOD. No	ISSUE	DATE
		EST. WT.	DIMNS. IN MM.					
DRAWING No.			BLD3723 INST					

REDRAWN	5882	4	11-1-02
LETTER 'M' DELETED	5381	3	18-1-99
IND LEVELS ADDED	3271	2	4-8-87
ORIGINAL		1	4-10-82