
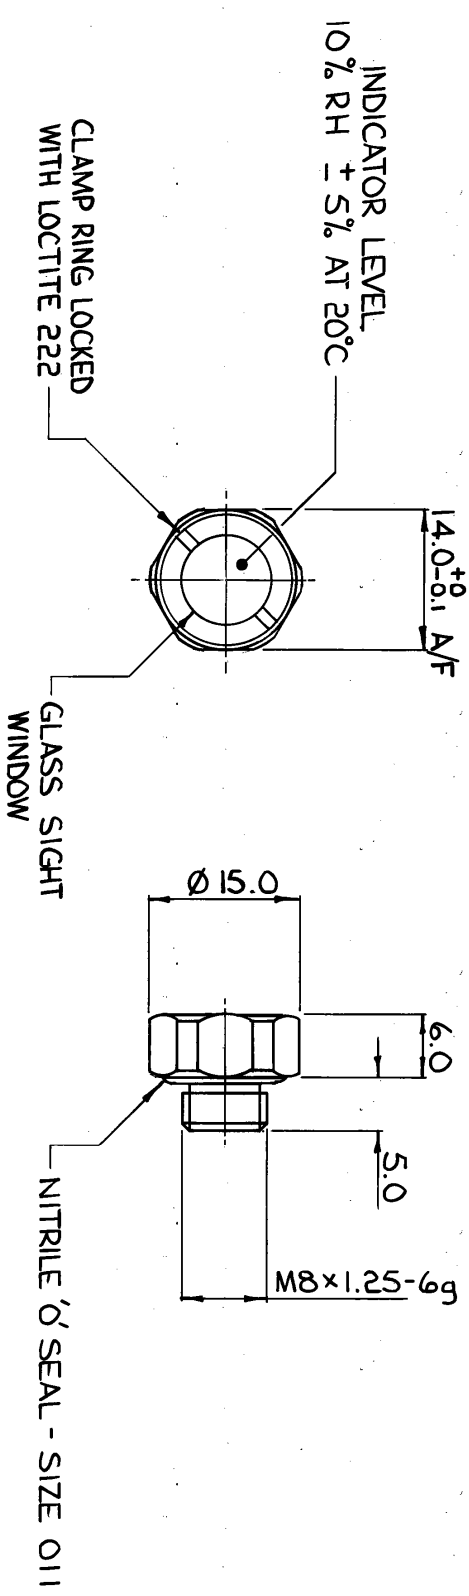


DRG. No. B/L/D5107 INST

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

THIRD ANGLE PROJECTION

DO NOT SCALE - ASK.



SPECIFICATIONS

- CONFORMS TO DEF. STAN 66-14 WHERE APPLICABLE AND THE FOLLOWING :
1. TEMPERATURE RANGE -40°C MINIMUM TO +90°C MAXIMUM.
 2. VIBRATION TO BS 2011 PART 2.1 - FREQUENCY 10 Hz TO 2 kHz FOR 6 HOURS, 0.75 mm AMPLITUDE.
 3. MAXIMUM LEAK RATE 1 cc/HOUR AT 5 PSI.
 4. MAXIMUM PRESSURE 10 PSI.

MATERIAL STAINLESS STEEL BS 303	PROTECTIVE TREATMENT ERONOL SSS2 BLACK-MATT OR SEMI-MATT	TOLERANCES UNLESS STATED ± 0.5
EST. WT. —	DIMNS. IN 3/16 /mm. SCALE (ORIGINAL) 2:1	

BROWNELL LTD. LONDON, N.W.10.
TITLE
HUMIDITY INDICATOR

FINISH ADDED	3653	D	12.4.89
UPDATED	3632	C	23.2.89
REDRAWN	3592	B	18.1.89
CHANGE	MOD. No.	ISSUE	DATE

CUSTOMERS REF. DRAWING No. **B/L/D5107 INST**

DRAWN **SA** CHECKED