


DRG No
BL/D 7941 INST
USED ON


THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED

DO NOT SCALE - ASK




SELF ADHESIVE LABEL



3 LEVEL HUMIDITY INDICATOR
20 & 40% RH AT 15 TO 25 °C
60% RH AT 5 TO 15 °C

DIAMOND KNURL

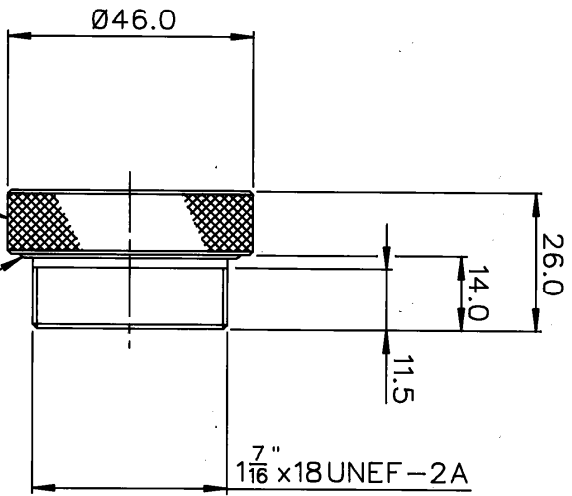

NEOPRENE 'O' SEAL

NOTE: HUMIDITY INDICATOR PLUG IS LEAK TESTED AT 1 PSI.

MATERIAL	PROTECTIVE TREATMENT	TOLERANCES UNLESS STATED	±0.5	TITLE BROWNELL LIMITED LONDON NW10 6685-99-721-9482
ALUM ALLOY	ANODISED BLACK	DIMS IN IN /mm (THRD INS)	SCALE (ORIGINAL) 1 : 1	
EST. WT. —				TITLE HUMIDITY INDICATOR PLUG

LABEL ADDED	6049	E	26/6/03
NSN ADDED	5915	D	6/3/02
IDENT MARKING ADDED	5446	C	19/4/99
BACK NUT & WASHER DELETED	5326	B	19/10/98
MOUNTING RING DELETED		A	24/8/98
BACK NUT & WASHER ADDED			

CUSTOMER REF.	DRAWN	CHECKED
DRAWING No	LJ	
BL/D 7941 INST		