

DRG. No.



BL/D 6306 INST

USED ON

THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

DO NOT SCALE - ASK.

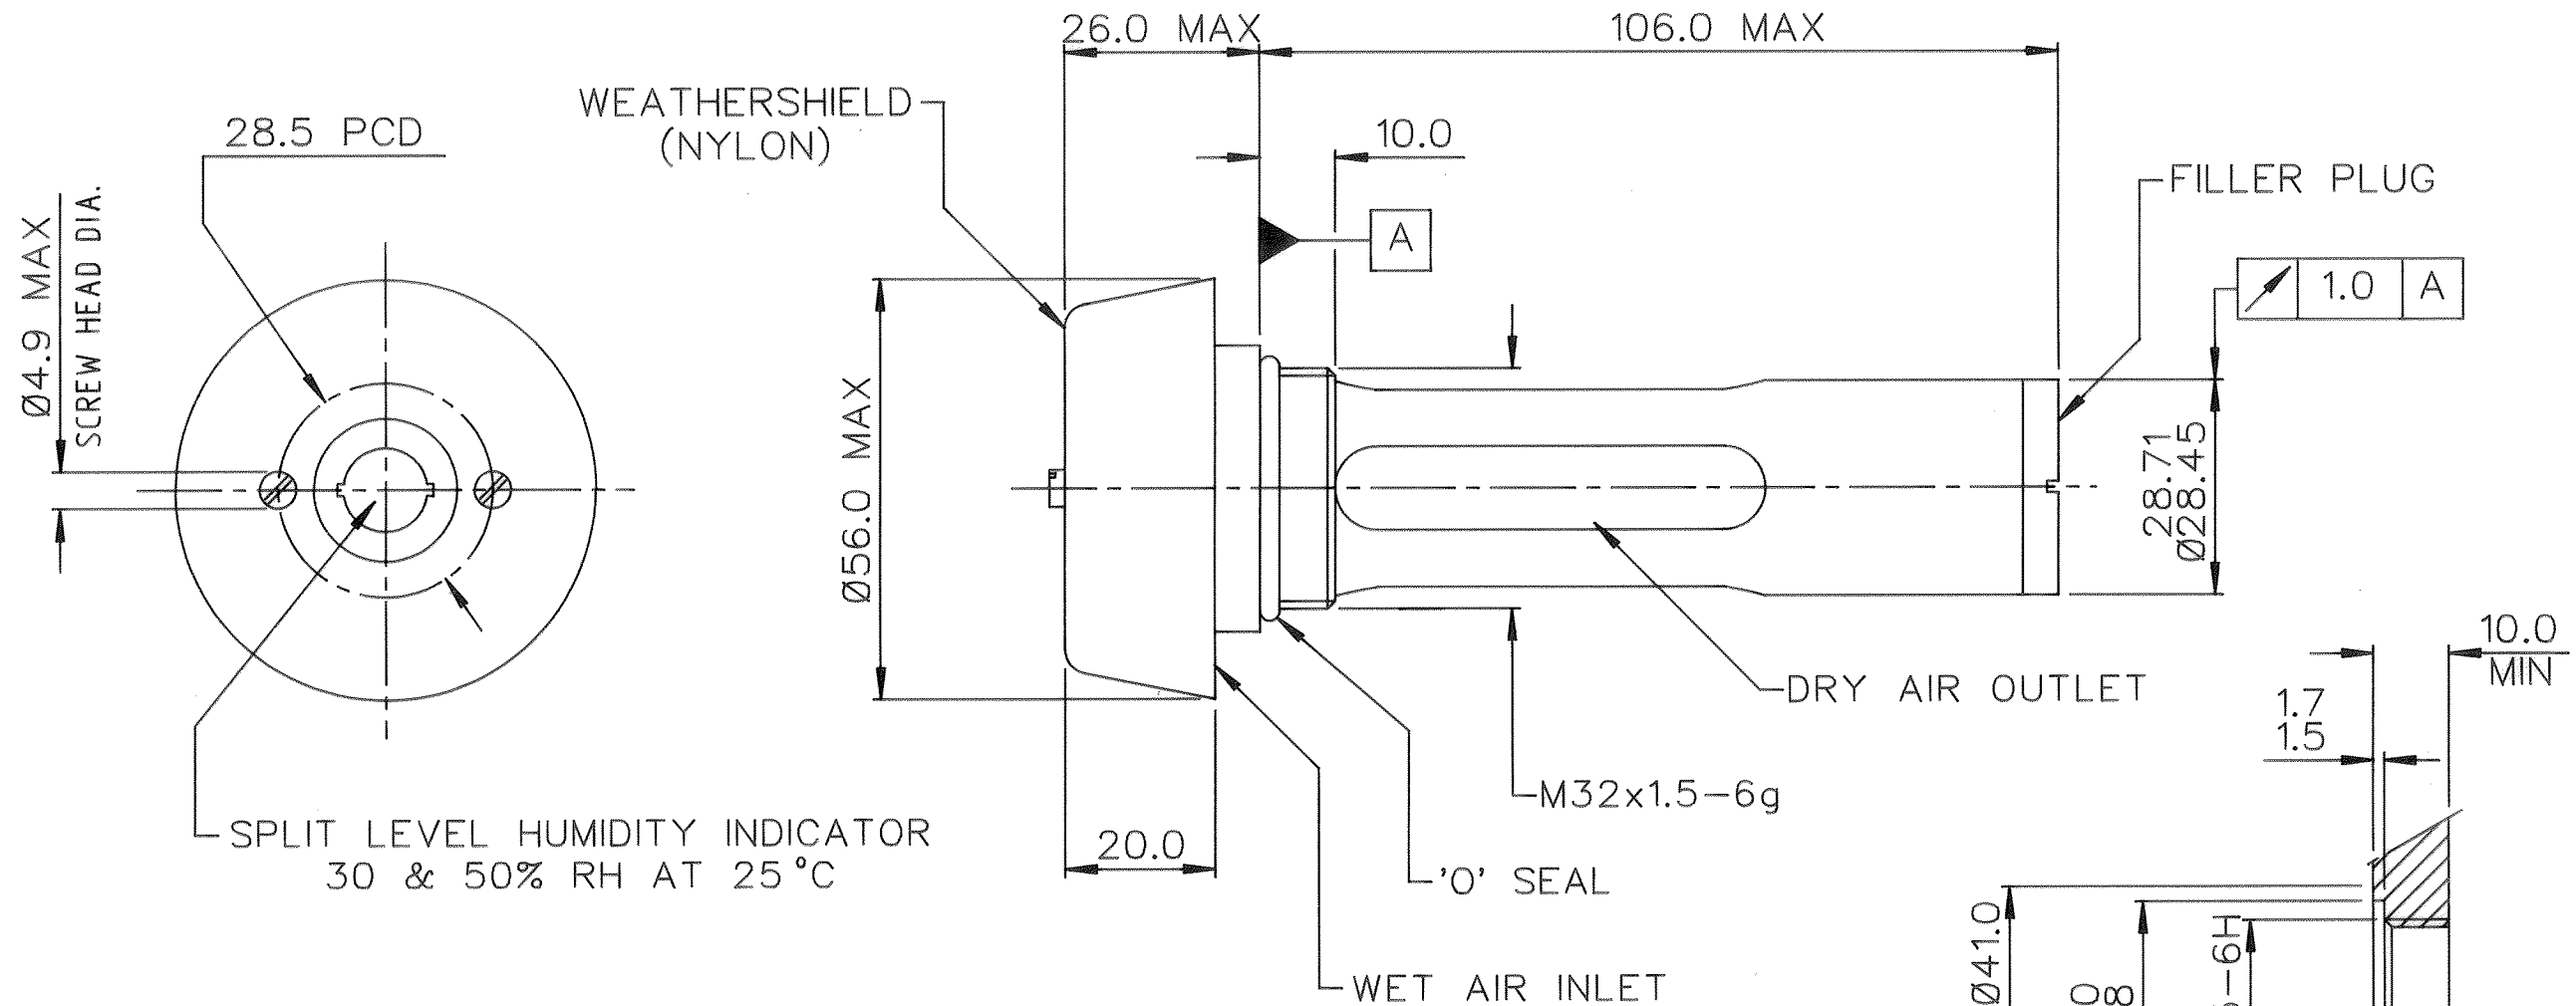

NOTES

1. CONTAINS APPROX 40 GRMS BEADED SILICA GEL DESICCANT, SPEC. BS7554.
2. REFILL PART No. BL/D2771/13.
3. CONFORMS TO DEF STAN 44-2 WHERE APPLICABLE.
4. PACKAGED FOR A SHELF LIFE OF 5 YEARS WHEN STORED IN TEMPERATE CONDITIONS.
5. NOMINAL FLOW RATE: 1.5 L/MIN AT 25.4mm Wg.

PANEL MOUNTING DETAIL

GEOMETRIC TOL CHANGED	4282	B	27/5/93
		A	15/3/93
CHANGE	MOD. No.	ISSUE	DATE

MATERIAL	PROTECTIVE TREATMENT	TOLERANCES UNLESS STATED	±1.0	BROWNELL LTD. LONDON, N.W.10.	CUSTOMERS REF.	DRAWN LJ	CHECKED
ALUM ALLOY	ANODISED	DIMNS. IN mm /m.m.		TITLE	DRAWING No.		
EST. WT. —		SCALE (ORIGINAL)	1 : 1	DESICCANT CONTAINER DEHUMIDIFIER (BREATHER TUBE)	BL/D 6306 INST		

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION.