


DRG No
BL/D13373 INST

USED ON _____



THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED

DO NOT SCALE - ASK



THIS DRAWING IS THE PROPERTY OF BROWNELL LTD., AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

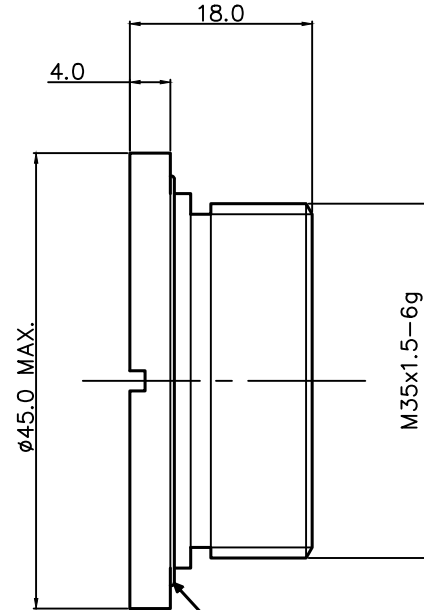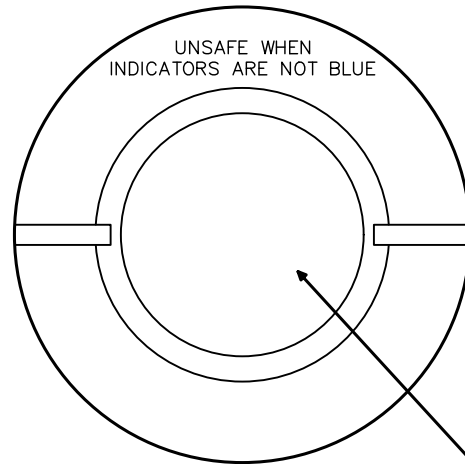

NOTES :-

1. M35 THREAD IS NATURAL FINISH FOR R.F. SCREENING CONTINUITY.
2. HUMIDITY INDICATOR DISC DOES NOT CONTAIN COBALT DICHLORIDE
3. CONTAINER WALL THICKNESS : 3 - 8mm.
4. CONFORMS TO PRODUCT SPECIFICATION No. 6000
5. TORQUE 20-25 lbs/ins

HUMIDITY INDICATOR
50% RH (SEE NOTE 2)

EPDM 'O' SEAL

ORIGINAL		1	11/06/20
CHANGE	MOD No	ISSUE	DATE

MATERIAL ALUMINIUM ALLOY	PROTECTIVE FINISH ANODISE A7 DYE BLACK (SEE NOTE 1)	TOLERANCES ±0.5	TITLE BROWNELL Ltd. LONDON NW10 7XF	RED DOT-ORIGINAL	DRAWN	CHECKED
		DIMENSIONS IN in/mm/mm		BLACK DOT-COPY	SKS	
EST. WT.		SURFACE ROUGHNESS 3.2µm	HUMIDITY INDICATOR	DRAWING NUMBER		
		SCALE (ORIGINAL) 2:1		BL/D13373 INST		