

Light efficiency:

28 Lumen/Watt

Light quality:

CRI: 69,6

Color temperature:

4356 K

Output: 17458 lm

Peak: 14986 cd

Power: 627,5 W

PF: 0,95




Product name:

PJ5_RGB_DIFFUSED_CD

Date and time:

28/11/2024 13.20.21

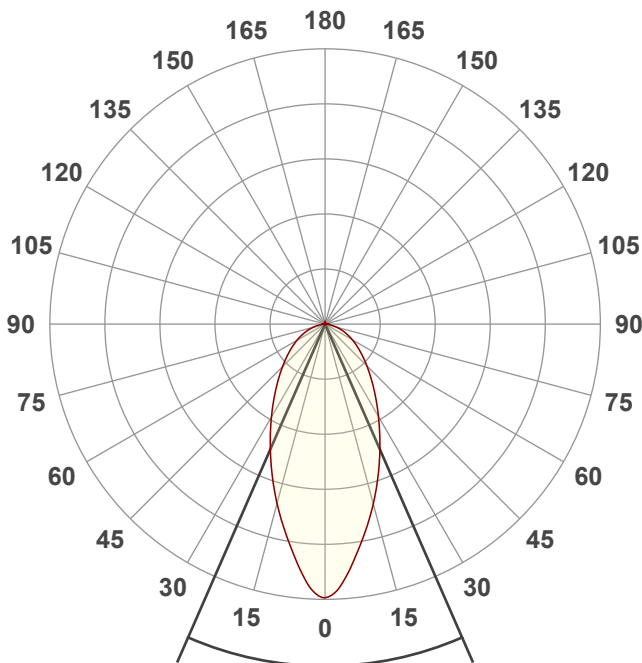

Beam angle

47,2°

Color




CIE1931

x: 0,369


y: 0,380



Spectra

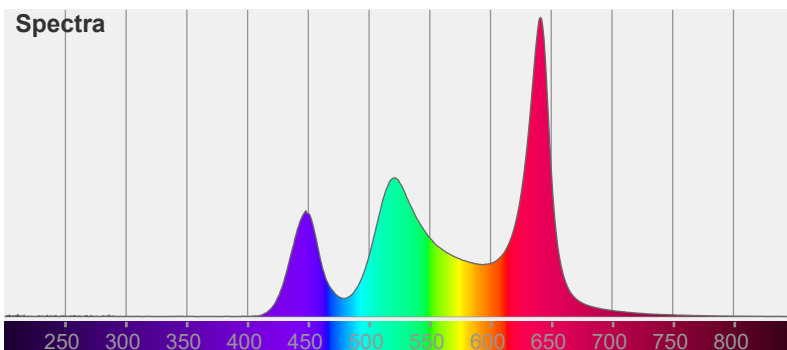


Power

Voltage: 230 V
Current: 2,86 A

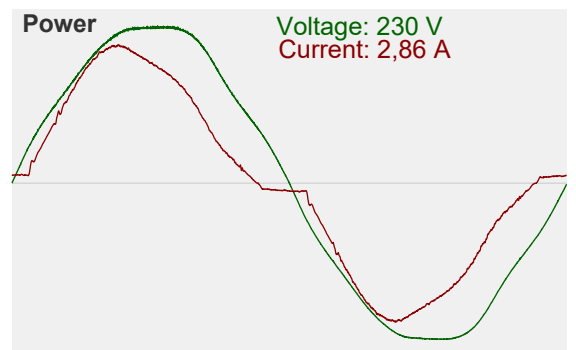


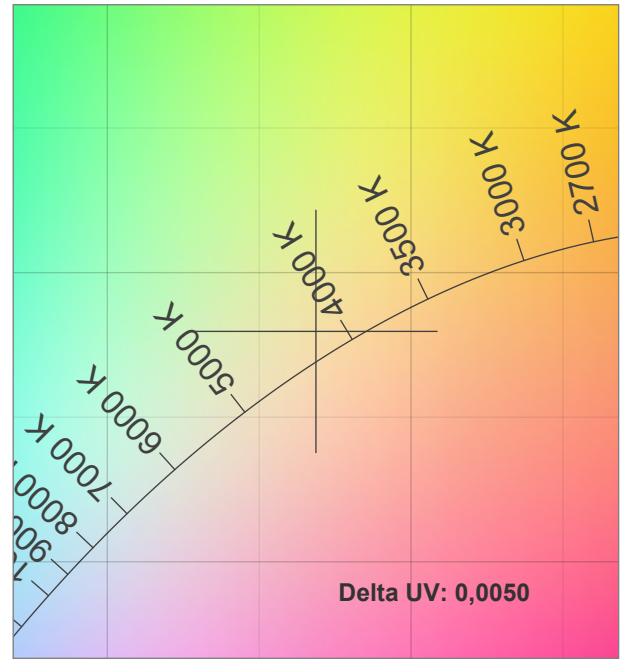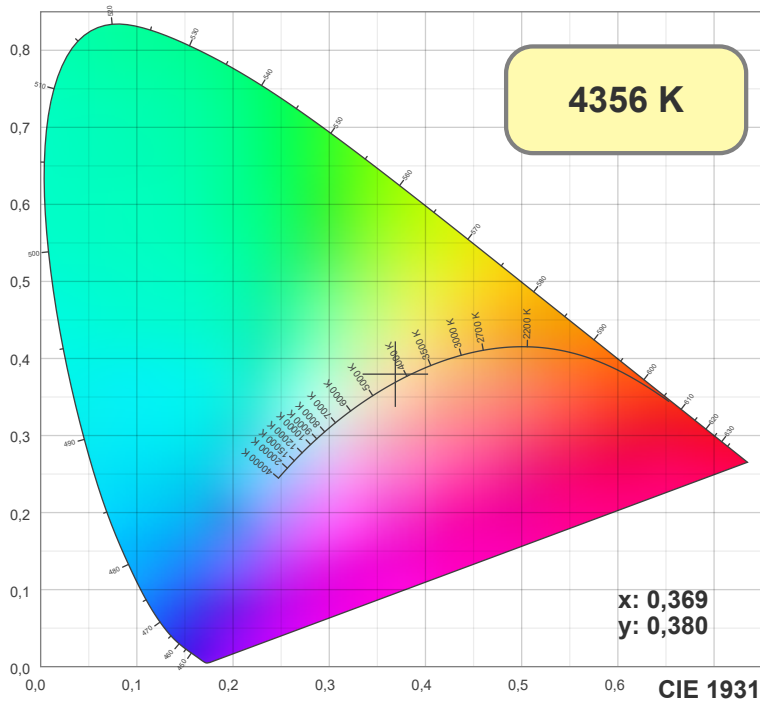

TM30: 80,0

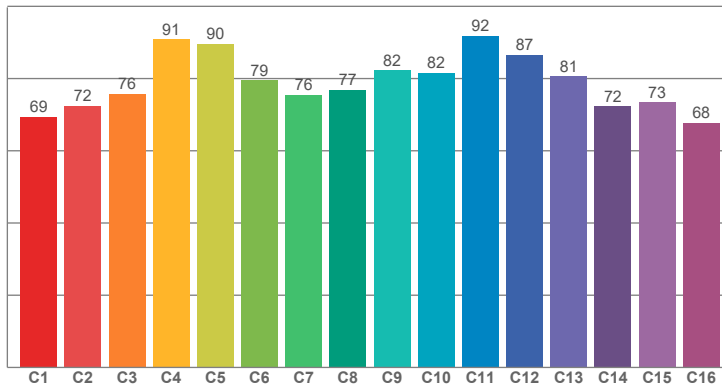

CRI: 69,6 (R1-R8)

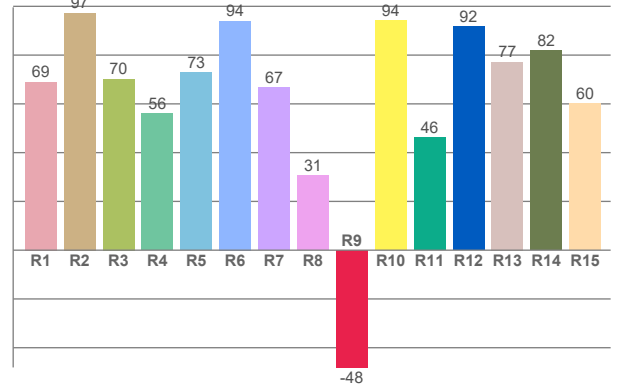

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
68,99	97,26	70,22	56,12	72,79	93,96	66,60	30,65	-48,09	94,18	46,15	91,82	77,17	81,81	60,21


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
69,42	72,48	75,74	90,80	89,60	79,45	75,54	76,84	82,26	81,57	91,90	86,51	80,56	72,29	73,38	67,77

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79,67	95,35	96,84	78,99	73,06	77,23	93,86	81,18	85,03	93,54	75,33	67,70	68,24	88,39	87,93

CQS: 80,5

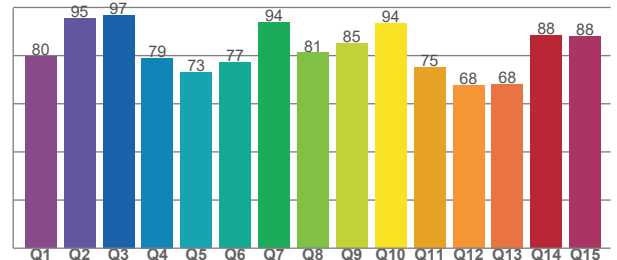

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
4356 K	69,6	-48,1	80,0	115,8	80,5	0,4	0,4	0,2	0,3	0,0050

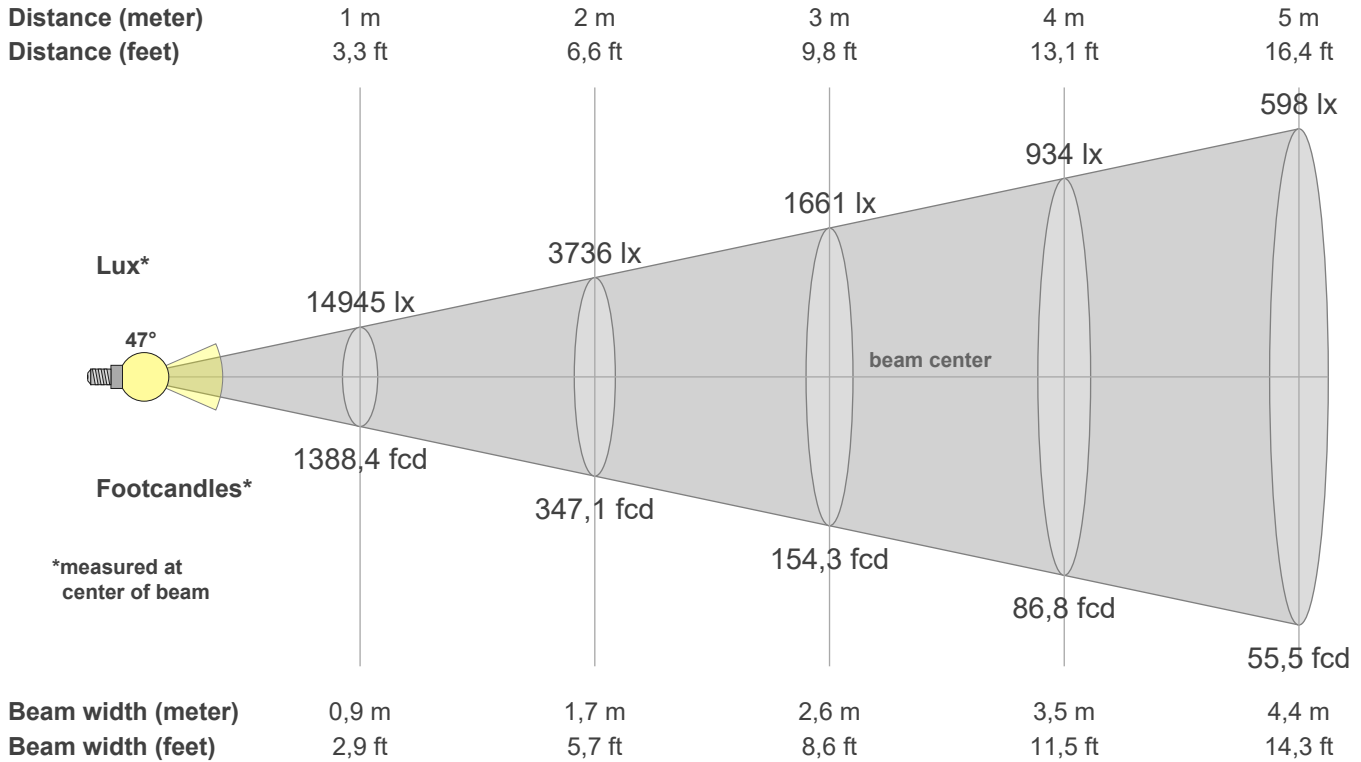

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
14,9K	13,8K	11,9K	10,2K	8,6K	7,1K	5,8K	4,8K	3,9K	3,2K	2,7K	2,2K	1,7K	1,3K	1,0K	0,6K	0,3K	0,1K	0,0K	0,0K
100%	92%	80%	68%	57%	48%	39%	32%	26%	22%	18%	14%	12%	9%	7%	4%	2%	1%	0%	0%

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
14,9K	13,8K	11,9K	10,2K	8,6K	7,1K	5,8K	4,8K	3,9K	3,2K	2,7K	2,2K	1,7K	1,3K	1,0K	0,6K	0,3K	0,1K	0,0K	0,0K
100%	92%	80%	68%	57%	48%	39%	32%	26%	22%	18%	14%	12%	9%	7%	4%	2%	1%	0%	0%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
14,9K	13,8K	11,9K	10,2K	8,6K	7,1K	5,9K	4,8K	4,0K	3,3K	2,7K	2,2K	1,8K	1,4K	1,0K	0,7K	0,4K	0,1K	0,0K	0,0K
100%	92%	80%	68%	57%	48%	39%	32%	27%	22%	18%	15%	12%	9%	7%	5%	2%	1%	0%	0%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
14,9K	13,8K	11,9K	10,2K	8,6K	7,1K	5,9K	4,8K	4,0K	3,3K	2,7K	2,2K	1,8K	1,4K	1,0K	0,7K	0,4K	0,1K	0,0K	0,0K
100%	92%	80%	68%	57%	48%	39%	32%	27%	22%	18%	15%	12%	9%	7%	5%	2%	1%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
47,2°	126,4°	159,3°	85,2%	67,1%