




technical provisions for ULTIME



| (mm)            | A    | B   | C*  | D   | E   |
|-----------------|------|-----|-----|-----|-----|
| MF 600-75       | 880  | 620 | 210 | *** | 311 |
| MF 800-50/75**  | 1080 | 620 | 210 | *** | 311 |
| MF 1050-50/75** | 1330 | 620 | 210 | *** | 311 |
| MF 1300-50      | 1580 | 620 | 210 | *** | 311 |



| (mm)            | A    | B   | C*  | D   | E   |
|-----------------|------|-----|-----|-----|-----|
| MF 800-75       | 1080 | 770 | 210 | *** | 385 |
| MF 1050-50/75** | 1330 | 770 | 210 | *** | 385 |

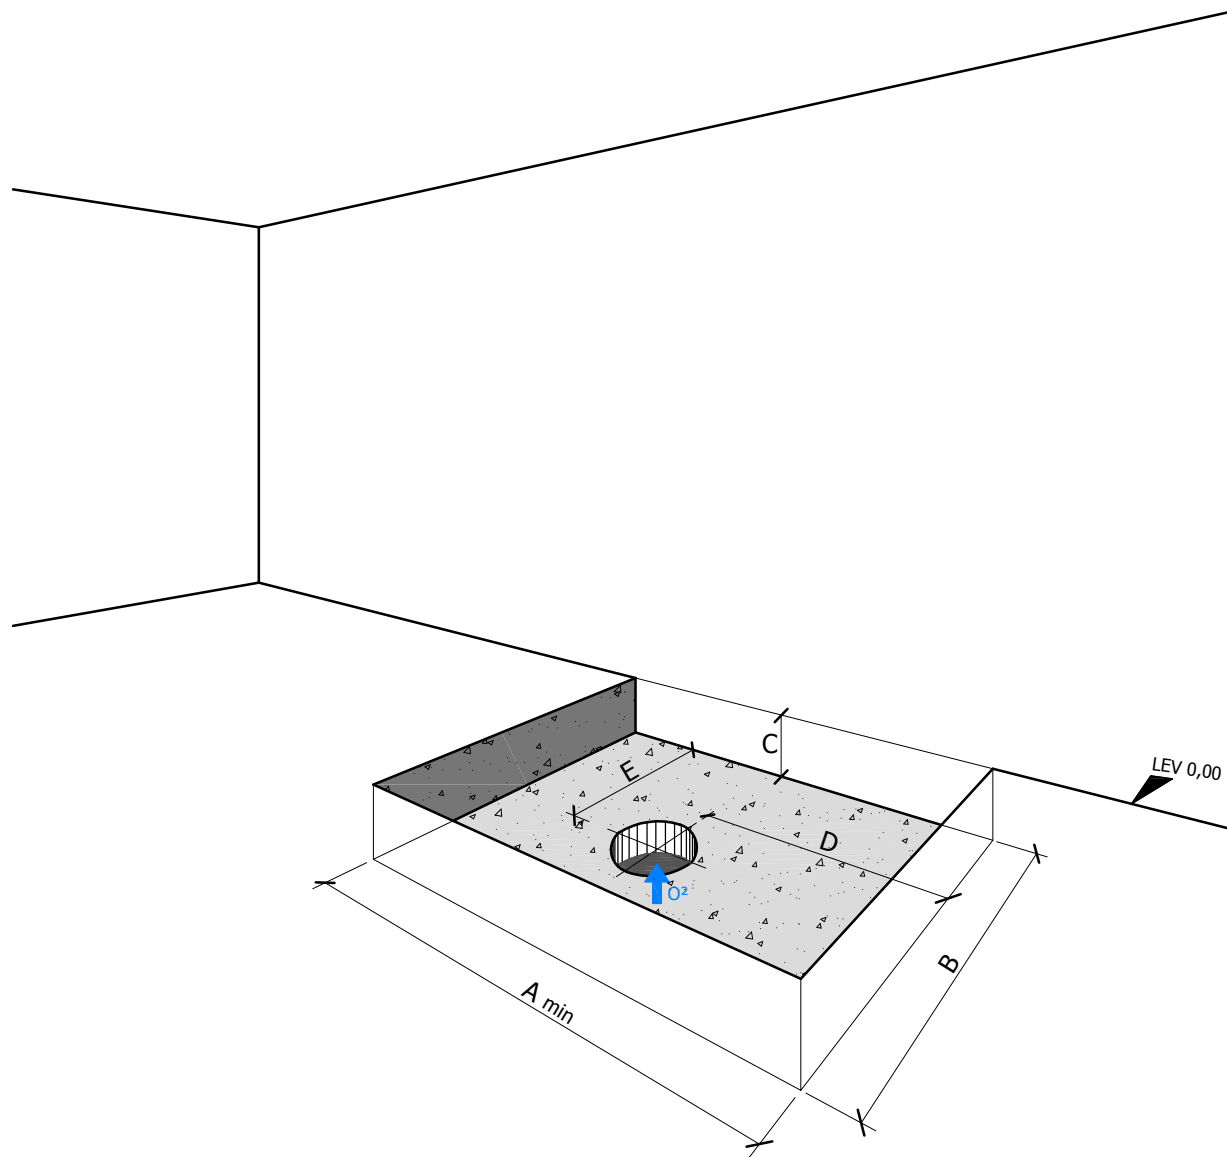

- \* minimum dimension when opening fireplace = NIV 0,00
- \*\* same dimensions if height fireplace = 75cm
- \*\*\* 1xØ160mm fresh air in center (O<sub>2</sub>)

General dimensional tolerances up to 6mm  
metalfire preserves the right to modify specifications without previous notice