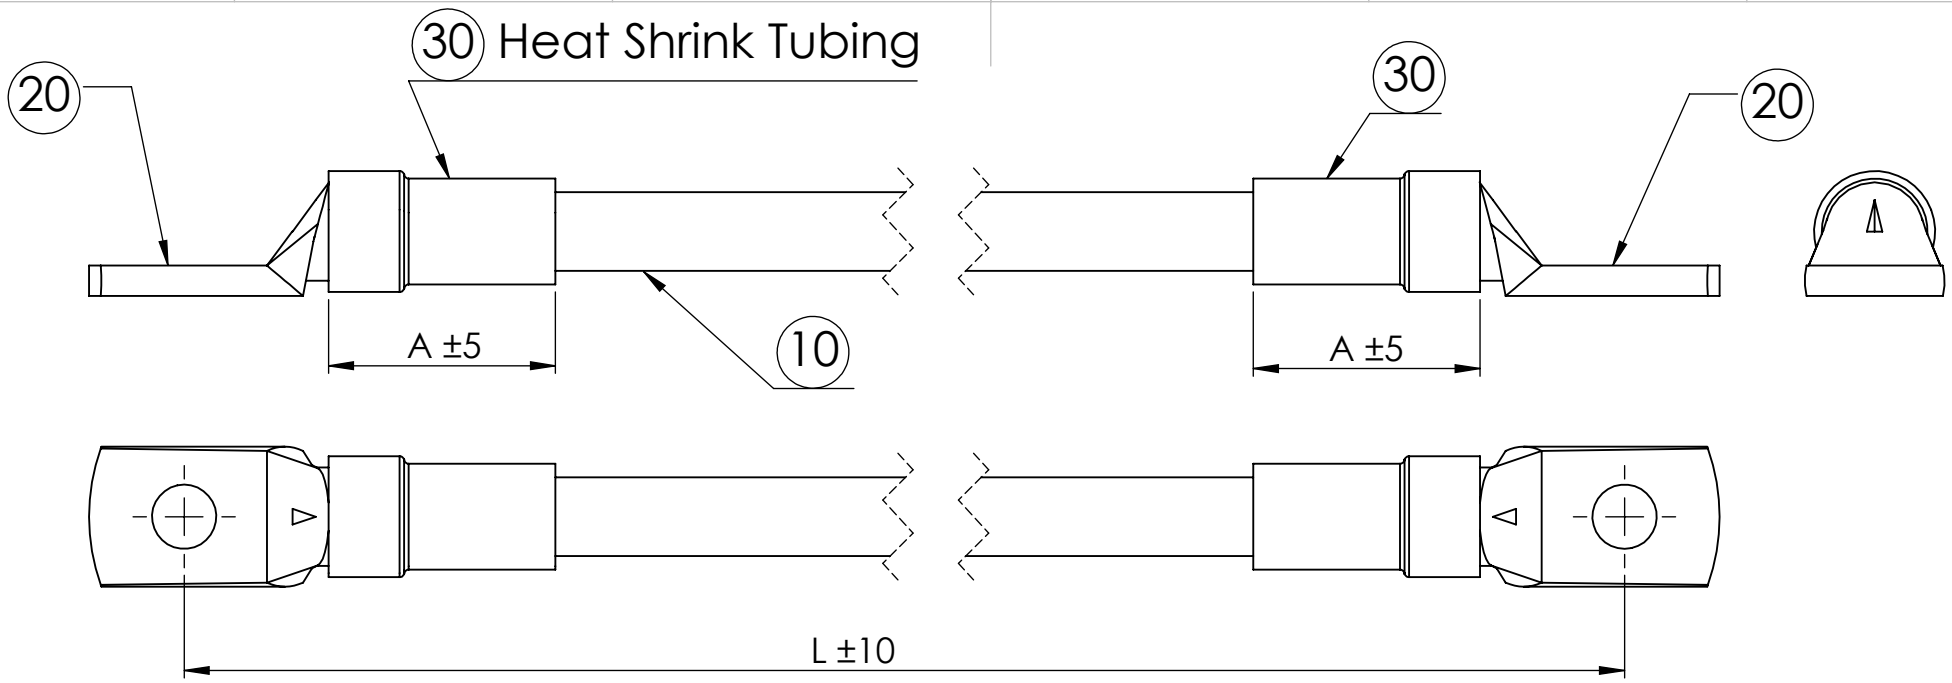

ARTICLE NO	10 Cable	Color	(L) length (mm)	20 (cable lug)	30 (Heat shrink tubing	(A) length mm
EPC 212705-1	AMOsoft 1x70 (amokabel)	Black	1500	KRF 70-8 tin	B11-19 (Black)	50
EPC 212705-2	AMOsoft 1x70 (amokabel)	Blue	1500	KRF 70-8 tin	B11-19 (Blue)	50
EPC 212705-3	AMOsoft 1x70 (amokabel)	Black	2000	KRF 70-8 tin	B11-19 (Black)	50
EPC 212705-4	AMOsoft 1x70 (amokabel)	Blue	2000	KRF 70-8 tin	B11-19 (Blue)	50
EPC 212705-5	AMOsoft 1x70 (amokabel)	Black	2500	KRF 70-8 tin	B11-19 (Black)	50
EPC 212705-6	AMOsoft 1x70 (amokabel)	Blue	2500	KRF 70-8 tin	B11-19 (Blue)	50
EPC 212705-7	AMOsoft 1x70 (amokabel)	Black	3000	KRF 70-8 tin	B11-19 (Black)	50
EPC 212705-8	AMOsoft 1x70 (amokabel)	Blue	3000	KRF 70-8 tin	B11-19 (Blue)	50

*The product shall be tested according to
IEC 61238-1-2 with a pull force minimum 4 200 N

This drawing remains our property and is not to be copied without our permission, nor to be communicated to any competitor or other unauthorized person.

Drawn by	Date	Approved by	Date	Material	Weight	Surface finish	Projection
Marten K	21-05-25				kg		

EMCOMP
EQUIPMENT FOR HARSH ENVIRONMENT

Description	Tolerance (Unless otherwise stated)	Size	Scale	Sheet
EPC (Emcomp Power Cable)		A4	1:1	1of (1)

Drawing number	Revision
EPC212705	A

Last save date 6/24/2021 9:57:01 AM