

The CS-530BS-EB is certified according to the European Standard EN54-24: 2008, the International Standard ISO 7240-24: 2010 and in compliance with the British Standard BS 5839-8: 2008 14.8. Certification number is 1488-CPR-0504/W


DESCRIPTION

- Highly intelligible speakers suited to voice alarm, public address and BGM application by two way system.
- Certified to EN 54-24, and ISO 7240-24, and compliant with BS 5839-8.
- All weather durability, water and dust protection to IP 66.
- Impedance change available by tapping changing located inside the terminal cover.


SPECIFICATIONS

Rated Power	30W
Rated Impedance	330Ω (30W), 670Ω (15W), 1.3kΩ (7.5W), 2.7kΩ (3.75W)
Sound Pressure Level	96dB (1m, 1W)
Maximum S. P. L.	111dB
Frequency Response	120 - 20,000 Hz (Peak -10dB)
Speaker Component	Bass : 12.7 cm (5") Coating Rubber Surround Treble : High Efficiency Tweeter
Coverage Angle (500Hz/1kHz/2kHz/4kHz, -6dB)	Horizontal : 140° / 60° / 90° / 90° Vertical : 180° / 100° / 95° / 140°
Environmental Type	B (outdoor applications)
Operating Temperature	-25 ℃ to +70 ℃
Dust/Water Protection	IP66
Speaker Mounting Method	Wall-mount
Applicable Cable	Solid copper wire or 7-core twisted copper wire 0.3 mm ² - 3.2 mm ² (AWG 22 - 12)
Connection	Screw terminal
Finish	Horn and terminal cover : ABS resin, Light Grey (RAL7035 or equivalent) Bracket and screws: Stainless steel
Dimensions	315 (W) x 215 (H) x 355.5 (D) mm
Weight	4.7 kg


APPEARANCE

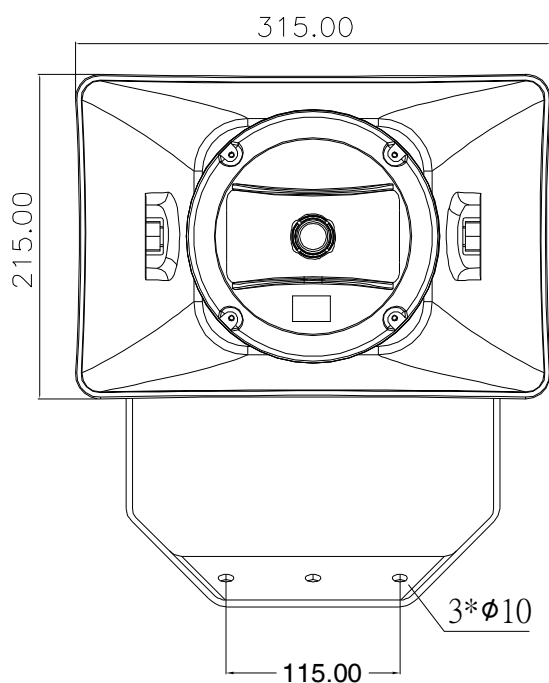

Front View

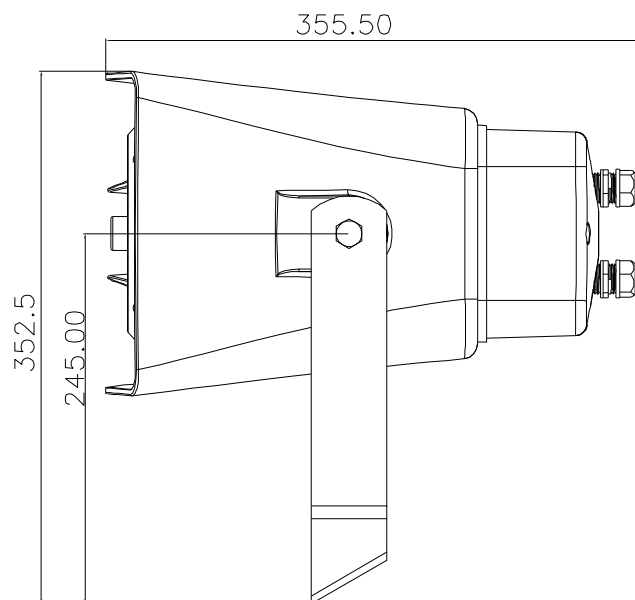

Side View

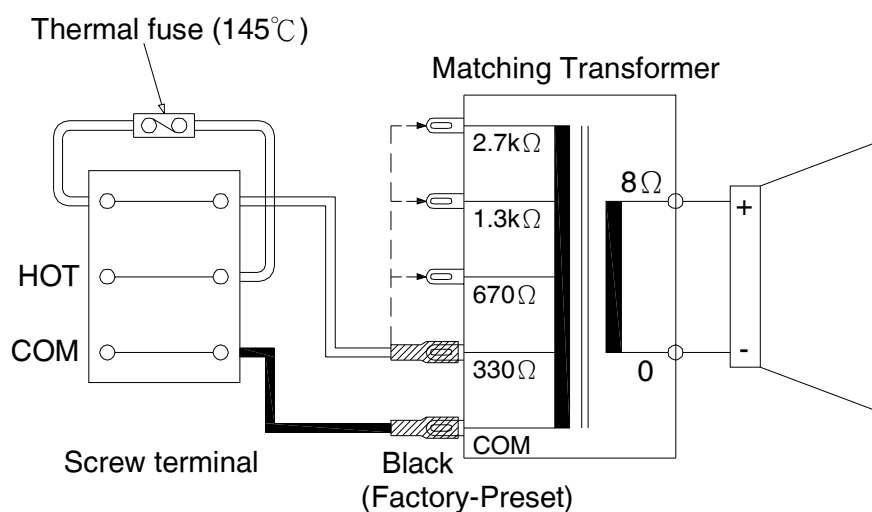

Wiring Diagram