


imagination™

Tooth-Coloured Archwires

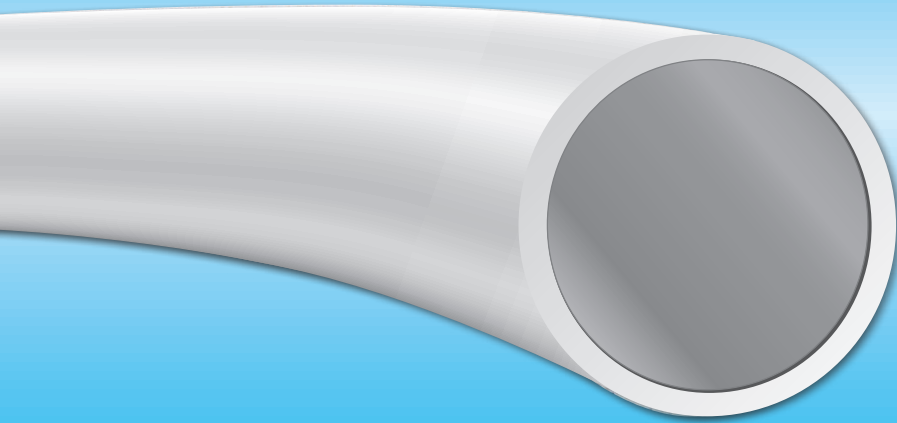

EPOXY COATED TOOTH-COLOURED ARCHWIRES

...with a superelastic NiTi or stainless steel core. Imagination offers very low friction when used with Image, Oyster ESL 2.0, Blonde, Rainbow and Solo or any ceramic, metal or plastic bracket (see University reports on gestenco.com).

- Superior wear resistance and colour stability
- Retains superelastic qualities
- More natural looking than white coatings
- The only complete aesthetic wire range for a full treatment
- Available in Straight-wire and MBT*-style archforms
- Also available with reverse curve of spee



Imagination with Oyster ESL 2.0 brackets

GESTENCO
Smiles forever

imagination™

Tooth-Coloured Archwires



Straight-wire archform

Coated Wire Size	Nickel-Titanium (units of 10)		Stainless Steel (units of 10)	
	Upper	Lower	Upper	Lower
.012	IM-NT-112	IM-NT-212	N/A	N/A
.014	IM-NT-114	IM-NT-214	IM-SS-114	IM-SS-214
.016	IM-NT-116	IM-NT-216	IM-SS-116	IM-SS-216
.018	IM-NT-118	IM-NT-218	IM-SS-118	IM-SS-218
.020	IM-NT-120	IM-NT-220	IM-SS-120	IM-SS-220
.016x.022	IM-NT-1622	IM-NT-2622	IM-SS-1622	IM-SS-2622
.017x.025	IM-NT-1725	IM-NT-2725	IM-SS-1725	IM-SS-2725
.018x.018	IM-NT-1818	IM-NT-2818	IM-SS-1818	IM-SS-2818
.018x.025	IM-NT-1825	IM-NT-2825	IM-SS-1825	IM-SS-2825
.019x.025	IM-NT-1925	IM-NT-2925	IM-SS-1925	IM-SS-2925
.020x.020	IM-NT-2020	IM-NT-3020	IM-SS-2020	IM-SS-3020
.021x.025	IM-NT-2125	IM-NT-3125	IM-SS-2125	IM-SS-3125



Reverse curve of spee

Nickel-Titanium Reverse Curve (units of 10)		
Coated Wire Size	Upper	Lower
.012	IM-RC-112	IM-RC-212
.014	IM-RC-114	IM-RC-214
.016	IM-RC-116	IM-RC-216
.018	IM-RC-118	IM-RC-218
.020	IM-RC-120	IM-RC-220
.016x.022	IM-RC-1622	IM-RC-2622
.017x.025	IM-RC-1725	IM-RC-2725
.018x.018	IM-RC-1818	IM-RC-2818
.018x.025	IM-RC-1825	IM-RC-2825
.019x.025	IM-RC-1925	IM-RC-2925
.020x.020	IM-RC-2020	IM-RC-3020
.021x.025	IM-RC-2125	IM-RC-3125



MBT*-style archform

Coated Wire Size	Nickel-Titanium (units of 10)		Stainless Steel (units of 10)	
	Upper	Lower	Upper	Lower
.012	IM-NT-412	IM-NT-512	N/A	N/A
.014	IM-NT-414	IM-NT-514	IM-SS-414	IM-SS-514
.016	IM-NT-416	IM-NT-516	IM-SS-416	IM-SS-516
.018	IM-NT-418	IM-NT-518	IM-SS-418	IM-SS-518
.020	IM-NT-420	IM-NT-520	IM-SS-420	IM-SS-520
.016x.022	IM-NT-4622	IM-NT-5622	IM-SS-4622	IM-SS-5622
.017x.025	IM-NT-4725	IM-NT-5725	IM-SS-4725	IM-SS-5725
.018x.018	IM-NT-4818	IM-NT-5818	IM-SS-4818	IM-SS-5818
.018x.025	IM-NT-4825	IM-NT-5825	IM-SS-4825	IM-SS-5825
.019x.025	IM-NT-4925	IM-NT-5925	IM-SS-4925	IM-SS-5925
.020x.020	IM-NT-4020	IM-NT-5020	IM-SS-4020	IM-SS-5020
.021x.025	IM-NT-4125	IM-NT-5125	IM-SS-4125	IM-SS-5125

* MBT is a registered trademark by 3M/Unitek.



Coated ligatures IM-CL-12

Coated Ligatures	
Description	Catalog no.
.012	IM-CL-12

The coating adds .002 inches to raw wire size.

GESTENCO
smiles forever

Gestenco International AB, P.O. Box 240 67, SE-400 22 Gothenburg, Sweden,
Phone +46 31-81 00 35, Fax +46 31-81 46 55, www.gestenco.com