

## MOREPOWER

### +3% Positive Tolerance

Positive tolerance on label rating power provides higher kWh for money invested.



Low iron, anti reflective coated glass gives 2% Energy gain.



Matching gives 2% additional power gain measured at STC conditions.



Independently verified by Photon and Öko-Test as amongst the best kWh/kWp output worldwide.



EL screening provides defect free modules.



Long life in marine and high pollution environments.



Pre-approved with financial institutions and rapid capability ensures customers' cost of project is reduced.



Audited controls for high value consistency.

## FOR LONGER

### True Linear Warranty 25 years

Highest power warranty coverage available on a linear basis.

### Workmanship Warranty 12 years

12 years global workmanship warranty.

### Strength 5400Pa

Industry leading snow loading capacity.

### Degradation Resistance

Superior resistance to PID.

### Low Carbon Footprint

One of the lowest carbon footprints over 100 years life cycle.

### Green Credentials

Fully committed to recycling during production and end of product life, a dedicated member of PV cycle.

### Eco Friendly Packaging

Friendly materials choice with high density packing.

### ISO14001 accredited ISO

Continuous improvement in reducing environmental impact.



## MUCH SAFER

## AND GREENER

ISO9001  
ISO14001  
OHSAS18001



### Electrical Data (STC)

Module Type	ECO-350M	ECO-355M	ECO-360M	ECO-365M	ECO-370M
Maximum Power at STC - $P_{mp}$ (W)	350	355	360	365	370
Open Circuit Voltage - $V_{oc}$ (V)	47.00	47.40	47.70	48.00	48.30
Short Circuit Current - $I_{sc}$ (A)	9.60	9.68	9.70	9.77	9.84
Maximum Power Voltage - $V_{mp}$ (V)	38.70	38.80	39.00	39.30	39.45
Maximum Power Current - $I_{mp}$ (A)	9.04	9.14	9.24	9.30	9.40
Module Efficiency STC- $\eta_m$ (%)	18.00	18.30	18.50	18.80	19.00

STC: Irradiance 1000 W/m<sup>2</sup> module temperature 25°C AM=1.5

Power measurement tolerance: +3%

### Electrical Data (NOCT)

Module Type	ECO-350M	ECO-355M	ECO-360M	ECO-365M	ECO-370M
Maximum Power at STC - $P_{mp}$ (W)	261	264	268	272	276
Open Circuit Voltage - $V_{oc}$ (V)	43.50	43.70	43.80	43.90	44.10
Short Circuit Current - $I_{sc}$ (A)	7.75	7.82	7.88	7.95	8.02
Maximum Power Voltage - $V_{mp}$ (V)	35.60	35.80	35.90	36.10	36.30
Maximum Power Current - $I_{mp}$ (A)	7.33	7.40	7.47	7.54	7.60

NOCT: Irradiance 800 W/m<sup>2</sup> ambient temperature 20°C wind speed :1m/s

Power measurement tolerance: +3%

### Maximum Ratings

Maximum System Voltage (V)	1000 DC/1500 DC
Maximum Series Fuse Rating (A)	15

### Temperature Ratings

Pmax Temperature Coefficient	-0.39 %/°C
Voc Temperature Coefficient	-0.29 %/°C
Isc Temperature Coefficient	+0.050 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	44±2 °C





### Mechanical Data

External Dimensions	1960x 992 x 40 mm
Weight	22.6 kg
Solar Cells	Mono crystalline 156.75 x 156.75 mm (72pcs)
Front Glass	3.2 mm tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP65/IP67
Output Cables	4.0 mm <sup>2</sup> , cable length:1100 mm
Connector	MC4 Compatible
Mechanical Load	5400 Pa

### Packing Configuration

Container	40'HG
Pieces per Pallet	27
Pallets per Container	24
Pieces per Container	648

### I-V&P-V Curve (ECO-360M)

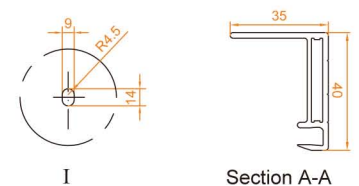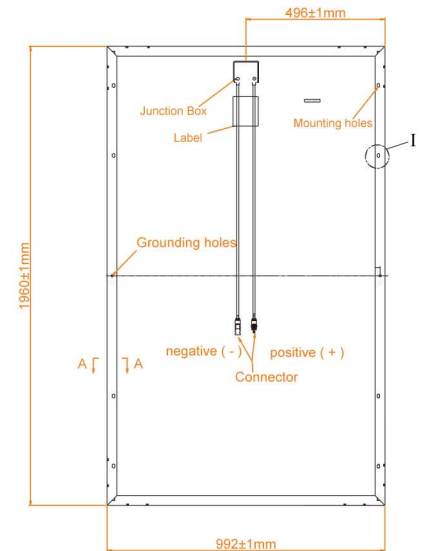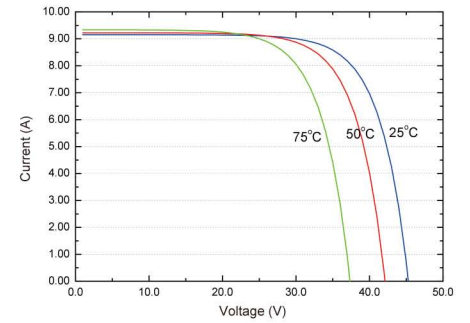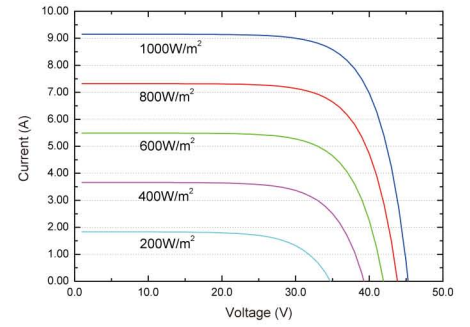

\* All Dimensions in mm